



M&E NOTE -
KITCHEN EXTRACT VENTILATION SHALL BE PROVIDED TO KITCHENS VIA CANOPIES OVER COOKING EQUIPMENT. THE AIR FLOW RATE WILL BE CALCULATED BASED UPON SPECIFIC KITCHEN EQUIPMENT BEING USED. A MINIMUM OF 40 AC/HR SHALL BE PROVIDED.
MAKE UP SUPPLY AIR SHALL BE PROVIDED BASED UPON 75% OF THE EXTRACT FLOW RATE.
THE SYSTEMS SHALL BE DESIGNED IN ACCORDANCE WITH BESADW172 - KITCHEN VENTILATION SYSTEMS AND EMAQ - CONTROL OF ODOUR & NOISE FROM COMMERCIAL KITCHEN EXHAUST SYSTEMS.

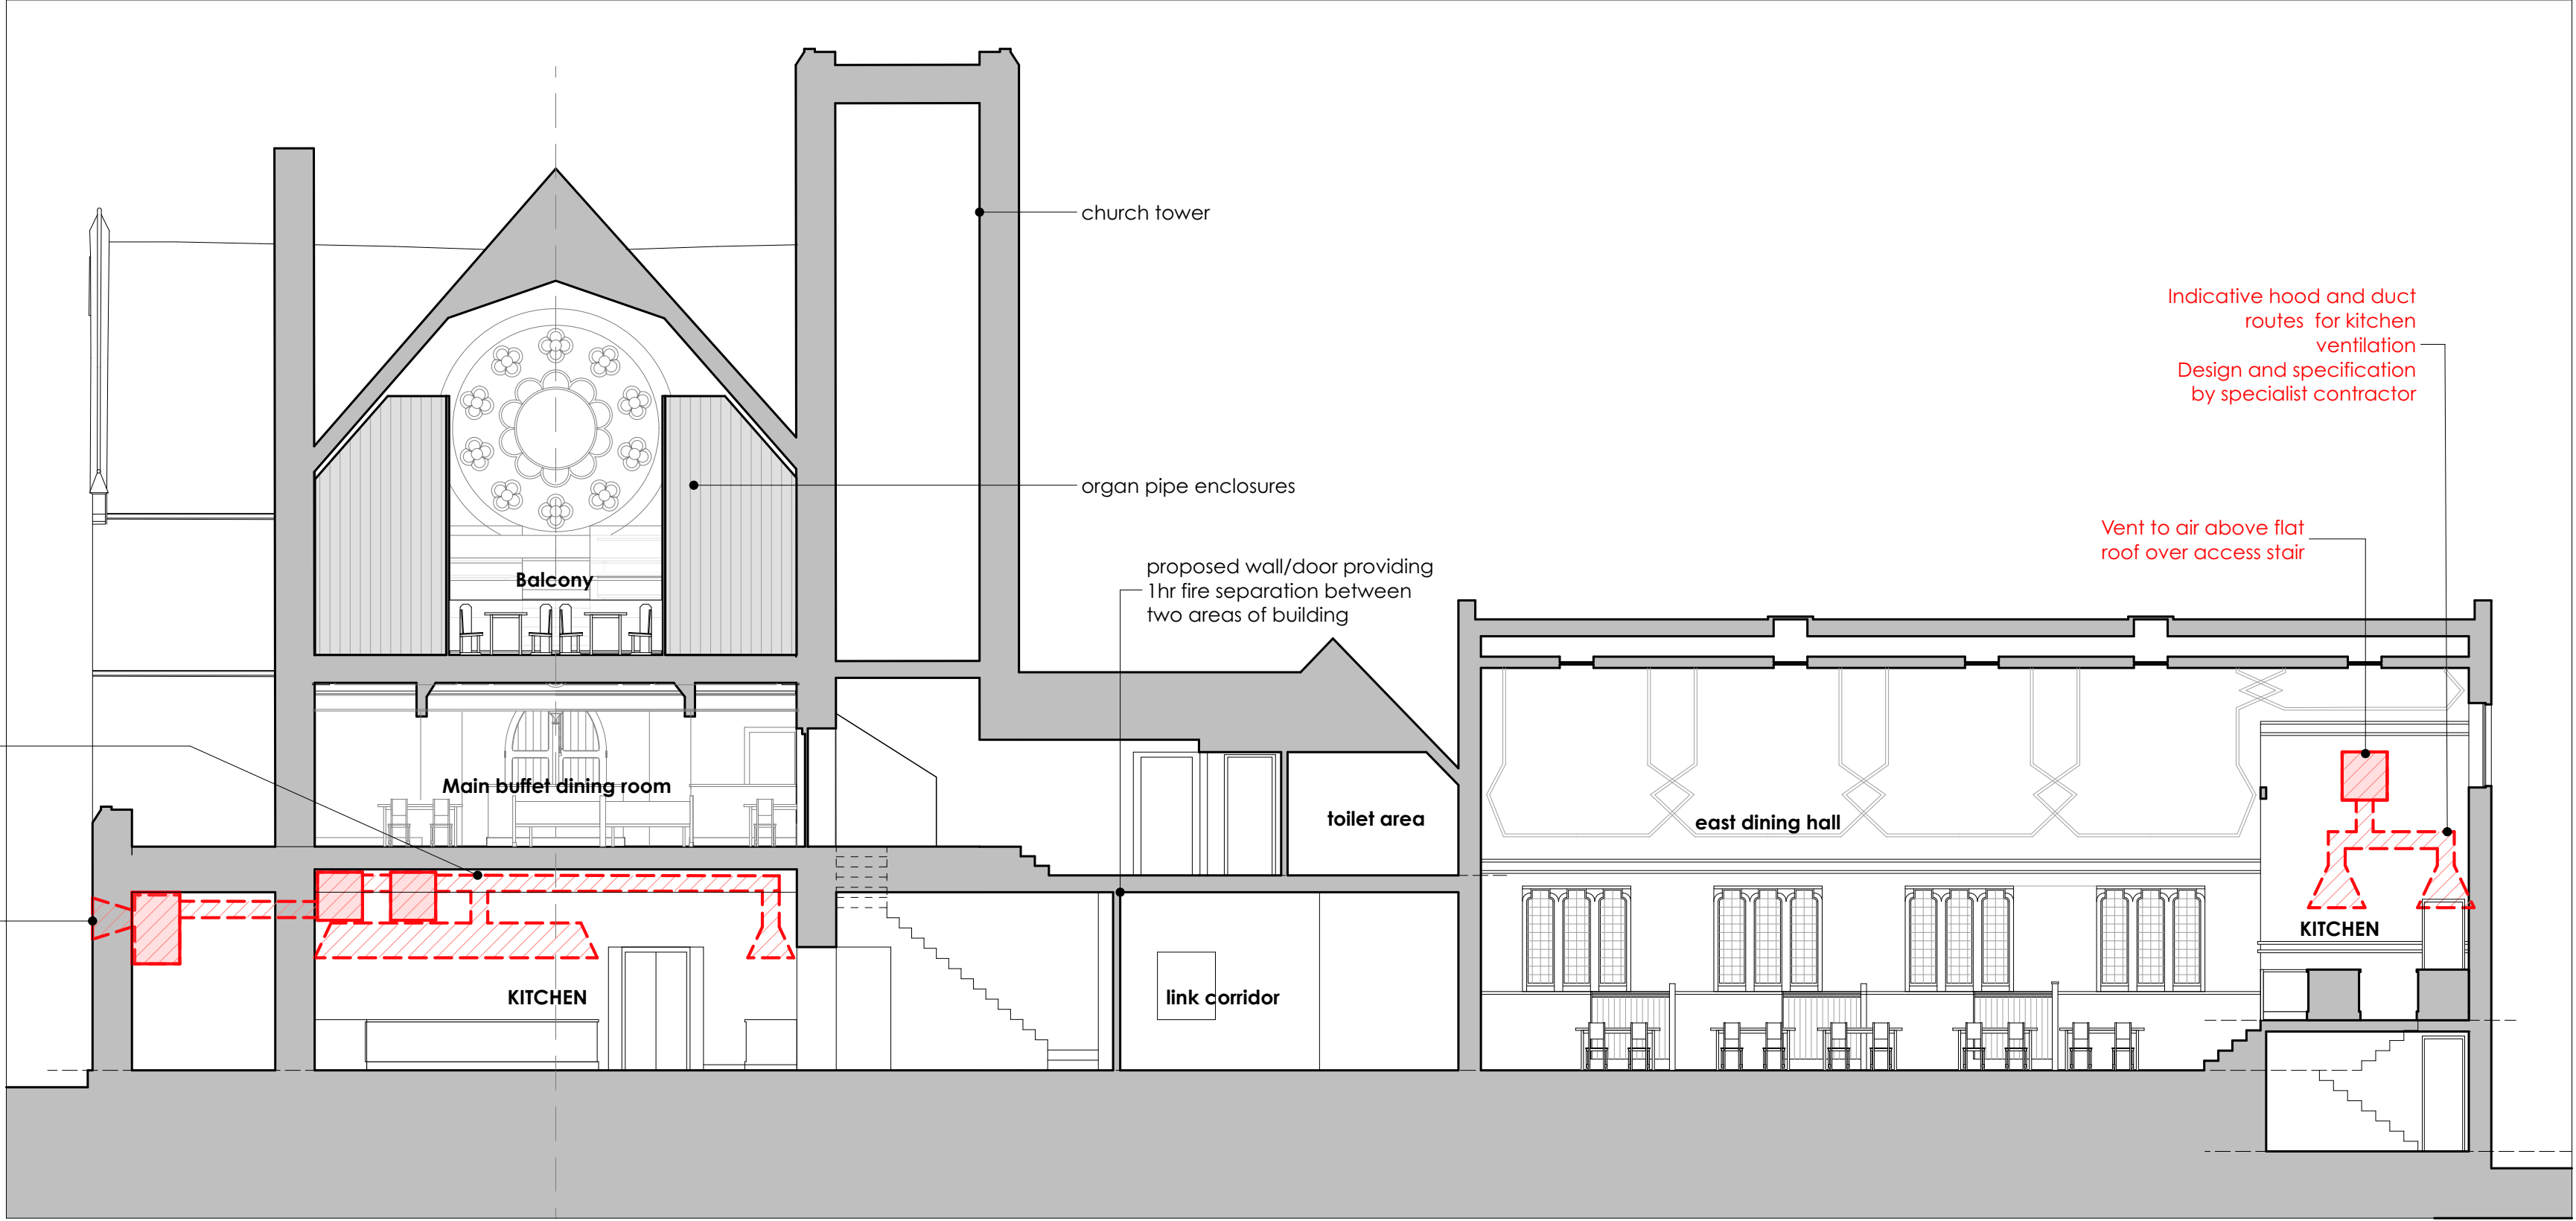


PROPOSED SECTION THROUGH BOTH KITCHEN AREAS

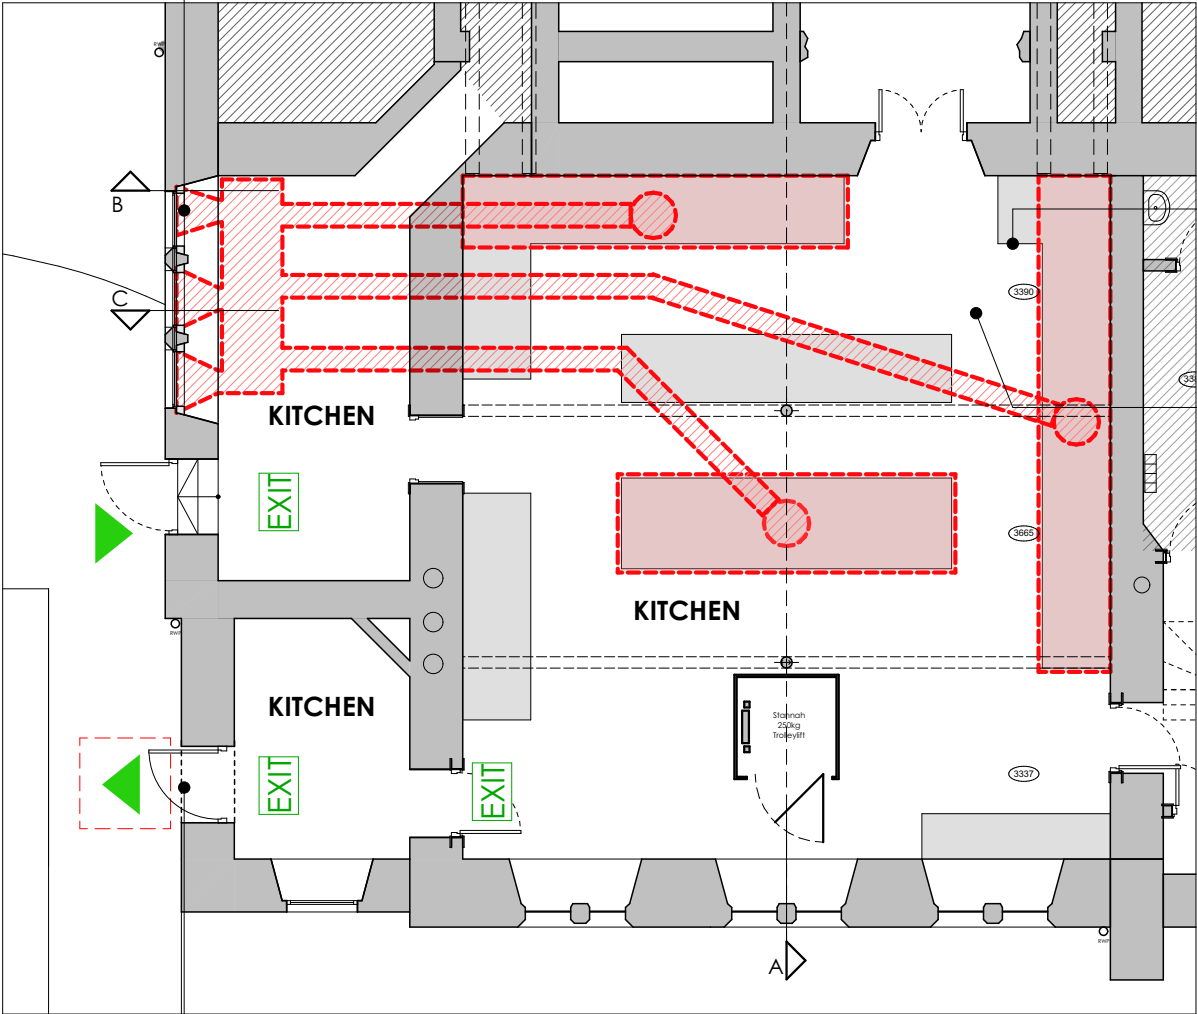

UNDERCROFT AREA TO SOUTH


New escape route
See drawing 3743/P/611 for new doors

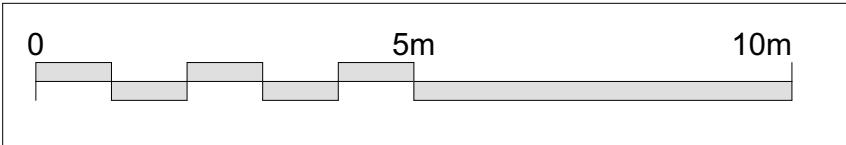


NOTES:

Kitchen ventilation specification to be confirmed with specialist manufacturer/contractor.

Design and specification to follow.

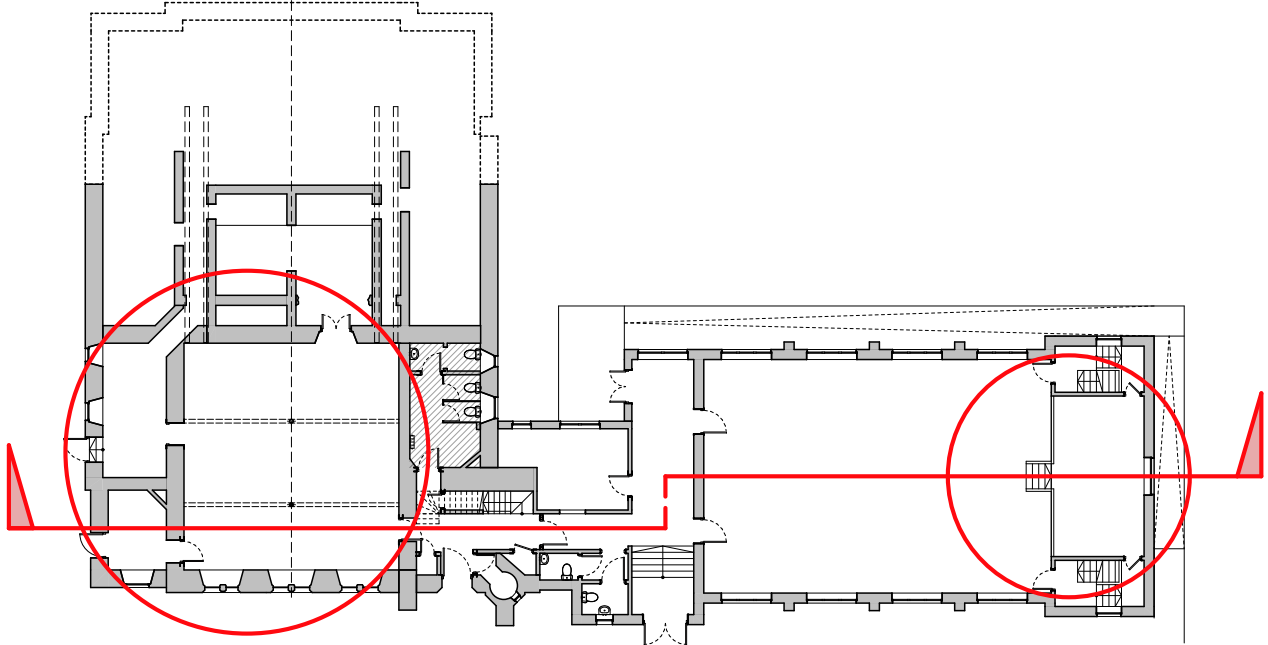

Kitchen Locations

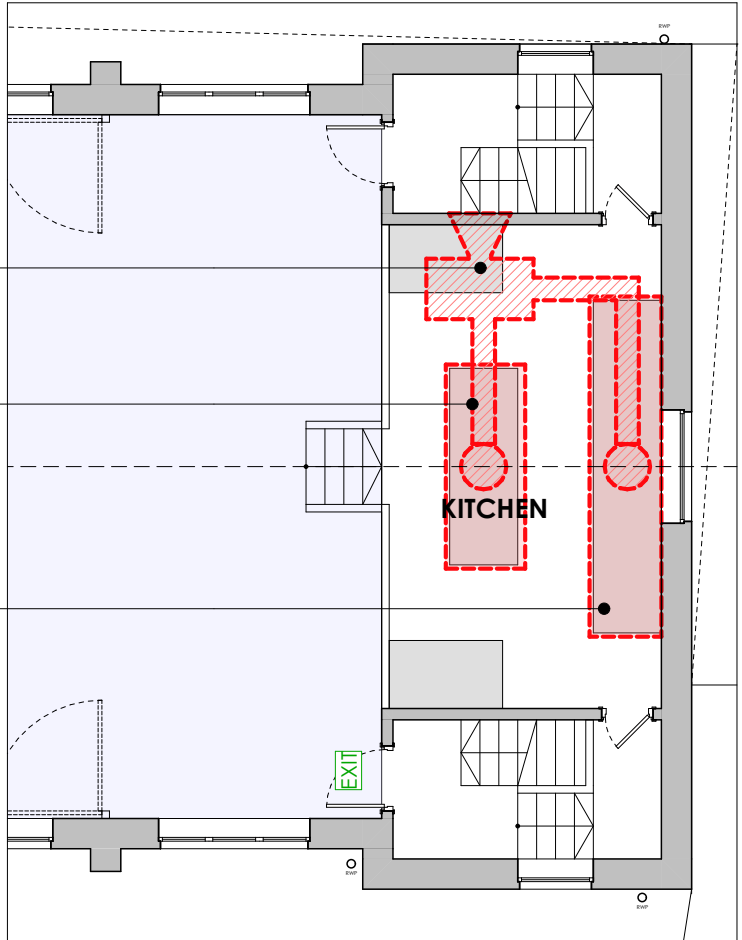

STAGE AREA TO EAST OF SECOND HALL

REV A - 13/05/2025 RJ
Updated to reflect discussions with M&E consultant

REVISIONS

Do not scale. All dimensions to be checked on site prior to commencement of work

Jewitt and Wilkie
architects

38 New City Road
Glasgow - G4 9JT
0141 352 6929
info@jawarchitects.co.uk
www.jawarchitects.co.uk

JOB TITLE

Former Allan Park South Church, Stirling
for
Hot World Cuisine Ltd.

DRAWING TITLE

Indicative Kitchen Ventilation A2

SCALE: 1:100 DATE:

DRAWN BY: CHECKED BY:

DRAWING NO: REV:

3743/P/615/A

PLANNING APPLICATION