



Bond-Rite[®] CLAMP

The self-testing static grounding clamp

The **Bond-Rite CLAMP**, patented exclusively by Newson Gale, is the only static grounding clamp that provides operators with visual verification that potentially charged equipment is connected to a verified static grounding point. The clamp contains a bright green LED which pulses continuously when it detects the grounding circuit has a resistance of 10 ohms or less. Once connected the **Bond-Rite CLAMP** continuously monitors the resistance of the circuit between the equipment and the verified ground point (e.g. wall-mounted bus bar).

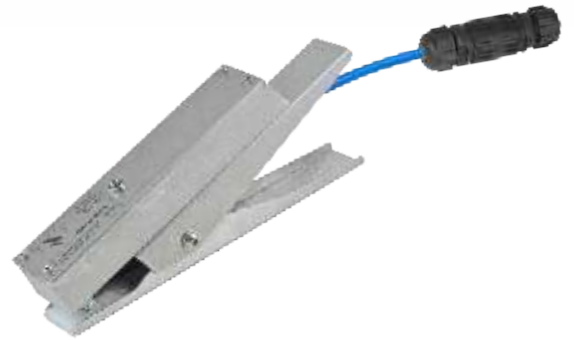

Bond-Rite CLAMP: stainless steel construction with robust circuit board enclosure

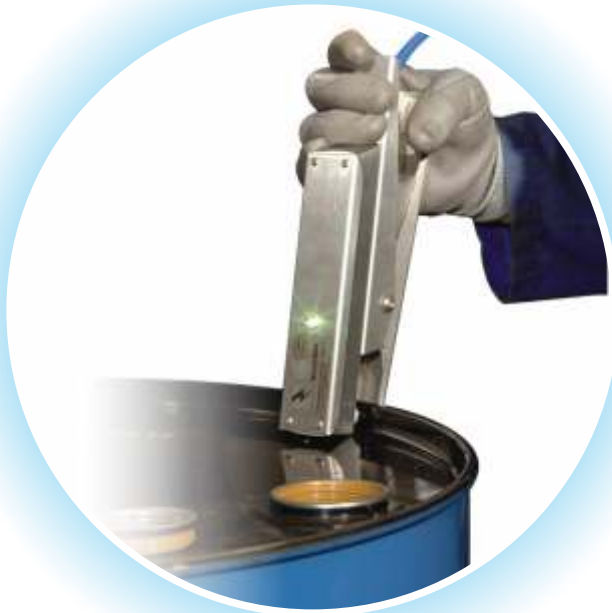

Pulsing LED confirms equipment is grounded

Typical Applications

- **Filling and dispensing to/from conductive containers, including drums, waste drums, vessels.**
- **Grounding equipment used in mixing, blending and agitation operations.**




IECEX



- Highly visible LED housed in grounding clamp ensures operators know when low resistance connection is achieved with potentially charged equipment.
- Tungsten carbide tips bite through product deposit build up, rust & drum coatings to ensure proper bonding connections are made.
- Stainless steel clamps designed to withstand use in tough chemical processing and industrial environments.
- Quick Connect provides personnel with the flexibility of removing the clamp from zoned / classified areas for battery replacement.
- 10 ohms loop resistance monitoring compliant with international Best Practice standards.
- Junction box mounted stowage pin provides operators with location to return the clamp when the process is complete.



Bond-Rite CLAMP supplied with 2 conductor cable, junction box, clamp stowage pin and grounding leads. Circuit monitoring board and battery mounted inside clamp. Grounding bus-bar not supplied.

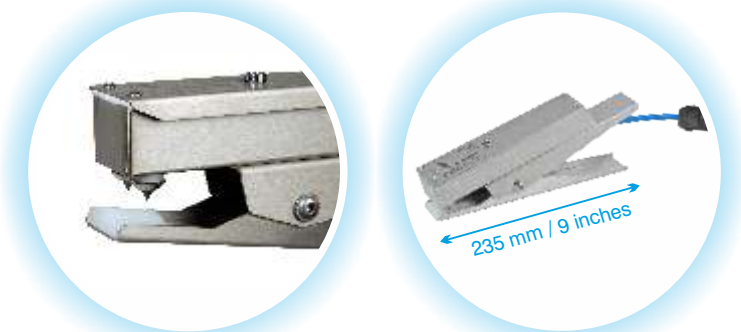

Tungsten Carbide tips penetrate static dissipation inhibitors including rust, product deposits and paint coatings

Certification

 II 1 GD
 Ex ia IIC T4 Ga
 Ex ia IIIC T135°C Da
 Ta = -40°C to +60°C
  APPROVED IS, Class I, II & III,

DIV. 1 & 2 and all gas groups
Zones 1 & 2

Battery

9v Lithium (battery included)

Monitoring Set Point

10 Ohms

Ordering Code	Product Description
BRC03	Bond-Rite Clamp + 3m(10ft) Hytrel Blue 2 Core Spiral Cable + Junction Box c/w Stowage Pin & Quick Connect.
BRC05	Bond-Rite Clamp + 5m (16ft) Hytrel Blue 2 Core Spiral Cable + Junction Box c/w Stowage Pin & Quick Connect.
BRC10	Bond-Rite Clamp + 10m (32ft) Hytrel Blue 2 Core Spiral Cable + Junction Box c/w Stowage Pin & Quick Connect.

The replaceable 9V battery provides up to 6 months of power for equipment grounded for up to an average of 6 hours per day. If longer periods are required please contact us for alternative Bond-Rite options.

The Bond-Rite CLAMP forms part of the Bond-Rite range of Static Grounding and Bonding Equipment available from Newson Gale



Newson Gale Inc
460 Faraday Avenue
Bldg C
Jackson, NJ 08527
USA
Tel: +1 732 961 7610
Fax: +1 732 791 2182
Email: groundit@newson-gale.com



Newson Gale Ltd
Omega House
Private Road 8
Colwick, Nottingham
NG4 2JX, UK
Tel: +44 (0)115 940 7500
Fax: +44 (0)115 940 7501
Email: groundit@newson-gale.co.uk



Newson Gale GmbH
Ruhrallee 185
45136 Essen
Deutschland
Tel: +49 (0)201 89 45 245
Fax: +49 (0)201 42 60 026
Email: erdung@newson-gale.de



Newson Gale S.E.A. Pte Ltd
136 Joo Seng Road
#03-01, Singapore
368360
Tel: +65 6420 0443
Fax: +65 6725 0570
Email: ngsea@newson-gale.com