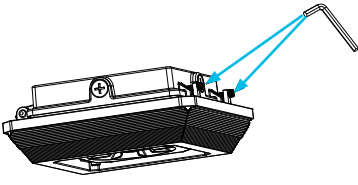
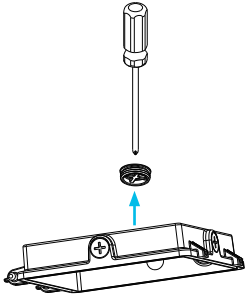
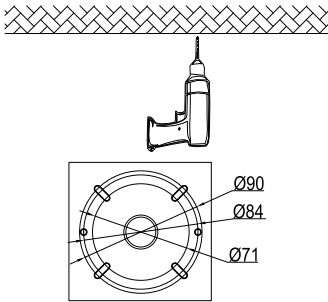
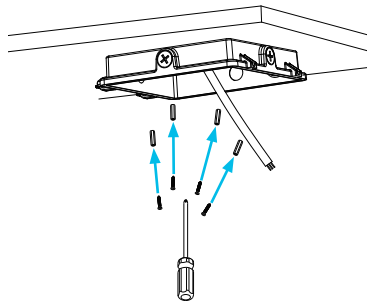
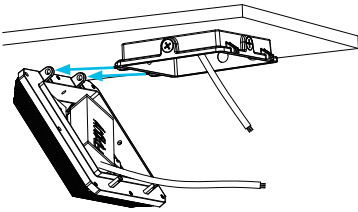
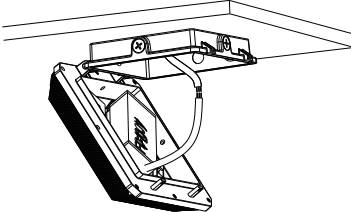
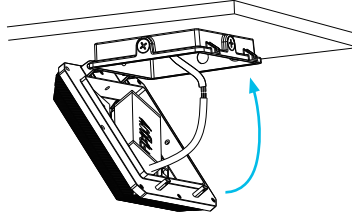
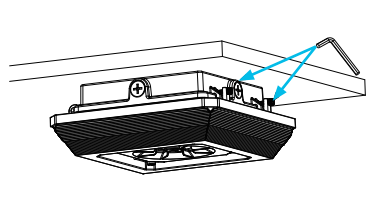









⚠ WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and DO NOT attempt repair unless you are a qualified technician.


Ceiling Mount

- 
- 
- 
- 
- 1** Disassemble the driver box by loosening the two screws on the driver housing.
- 2** Loosen the 3/4" plug on the driver box cover with a screwdriver.
- 3** Drill holes according to the fit plate provided.
- 4** Screw the driver box cover in place on the ceiling.
- 
- 
- 
- 
- 5** Align mounting holes on the fixture body and insert it horizontally.
- 6** Connect wiring while the fixture body is open.
- 7** Close the fixture body, covering the driver box.
- 8** Lock the two cap screws.


Conduit Mount

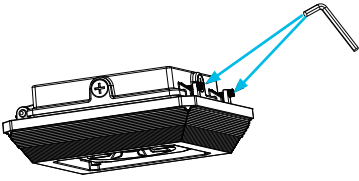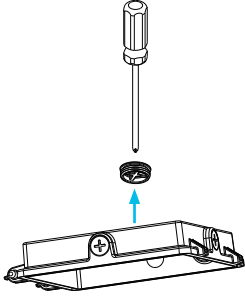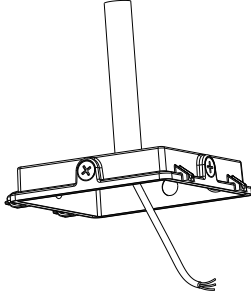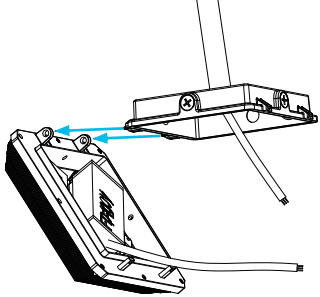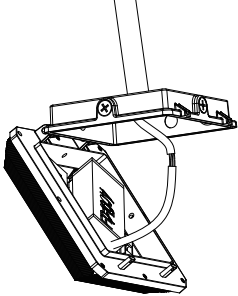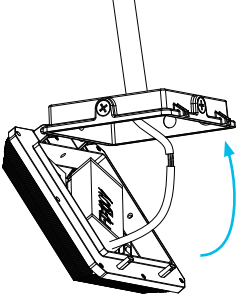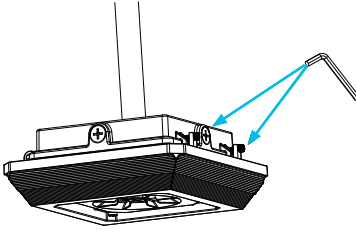- 
- 
- 
- 
- 1** Disassemble the driver box by loosening the two screws on the driver housing.
- 2** Loosen the 3/4" plug on the driver box cover with a screwdriver.
- 3** Fix the driver box cover on the 3/4" tube conduit (not included).
- 4** Align mounting holes on the fixture body and insert it horizontally.
- 
- 
- 
- 5** Connect wiring and install any needed sensors (not included).
- 6** Close the fixture body, covering the driver box.
- 7** Lock the two cap screws.

Standard Wiring Diagram

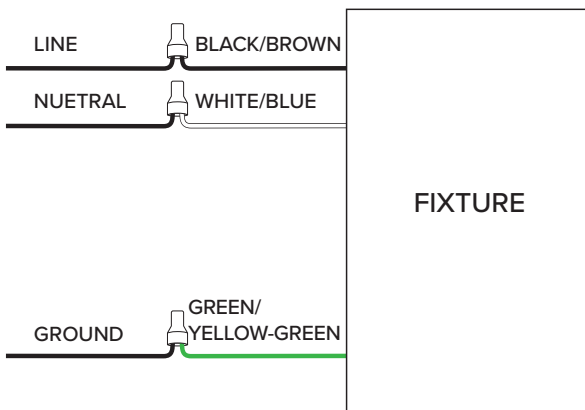

Function Adjustment

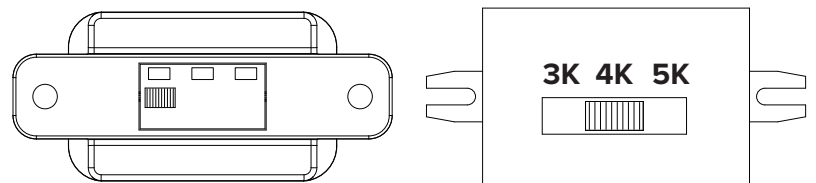

The fixture is Wattage and Kelvin Selectable. Adjustments can be made when the power is disabled.