




Spectral distribution

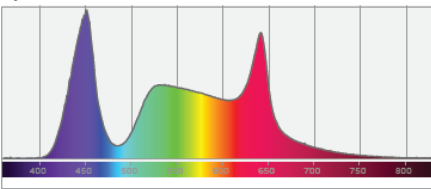


Color coordinates



Zoom color point



CRI R values

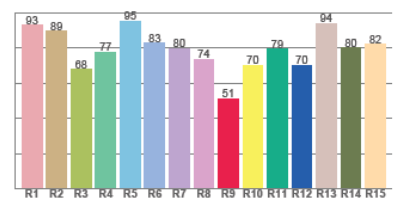

# Photometric Test Report

\*Due to additional product enhancements, an updated version of this report may be available online. Please check [www.adj.com](http://www.adj.com) for the latest revision/update of this report.

# Encore Profile Pro WW



Light Efficiency:

38 Lumen/Watt

Light Quality:

CRI: 95.7

Color Temperature:

3156 K

Output: 9818 lm

Peak: 56465 cd


Power: 256.5 W

PF: 0.99



Beam Angle

29.7°

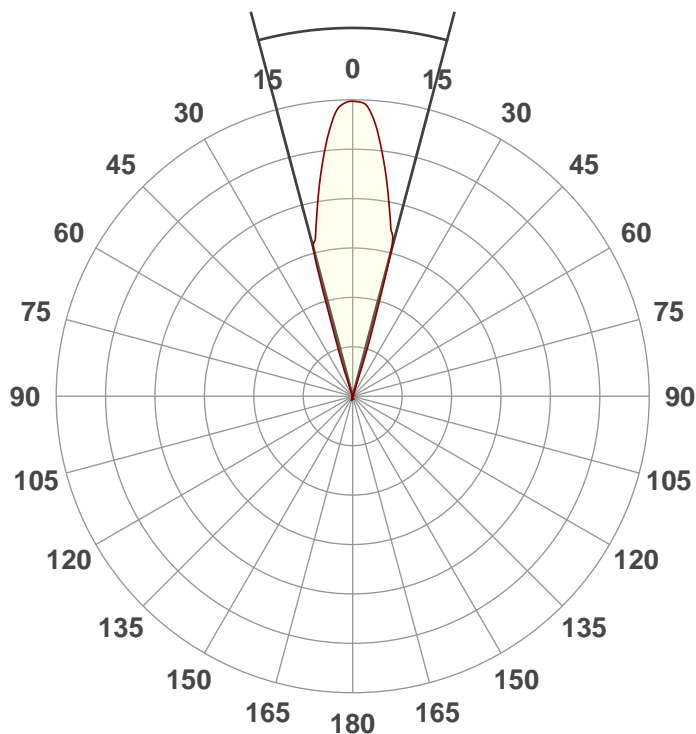

Test:

Full On 36Deg

Date:

11/18/2019


Note:




CIE 1931  
x: 0.425  
y: 0.398

Spectra

Dominant Wavelength: 583nm


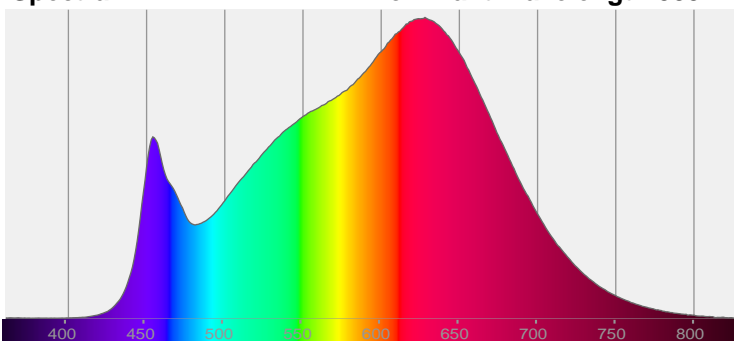


Power

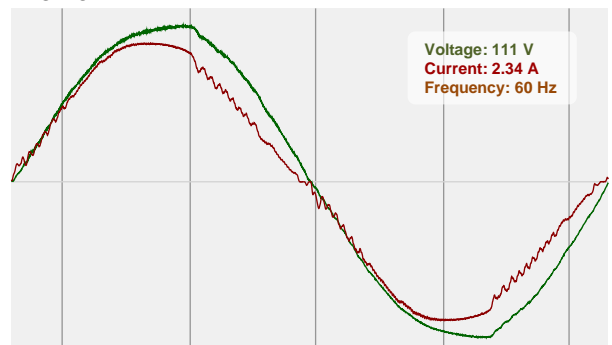


Voltage: 111 V  
Current: 2.34 A  
Frequency: 60 Hz


## Color Details

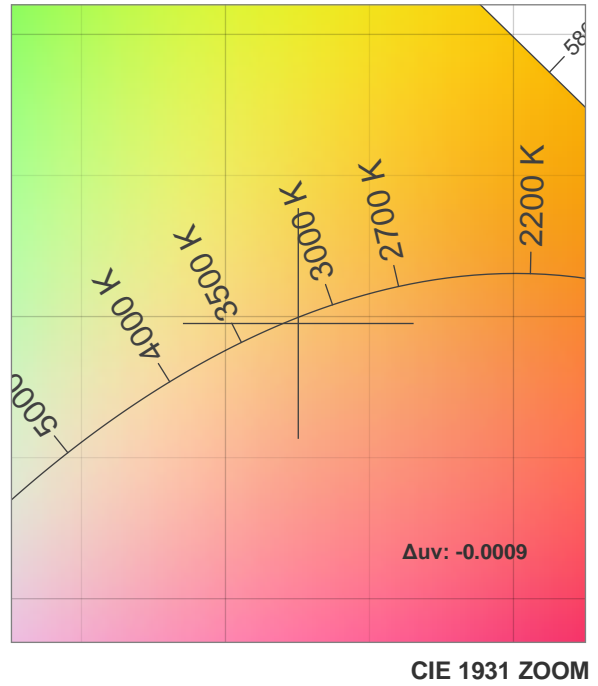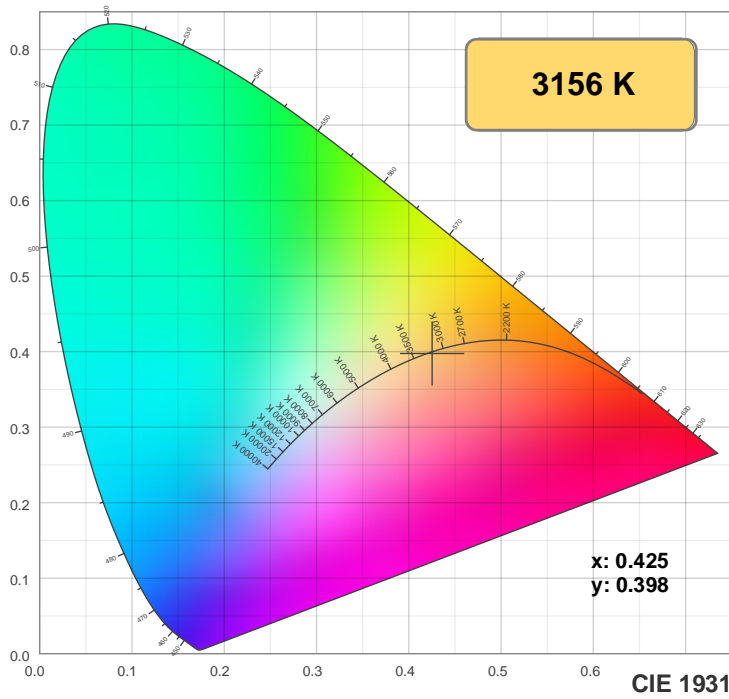

TM30: 91.6

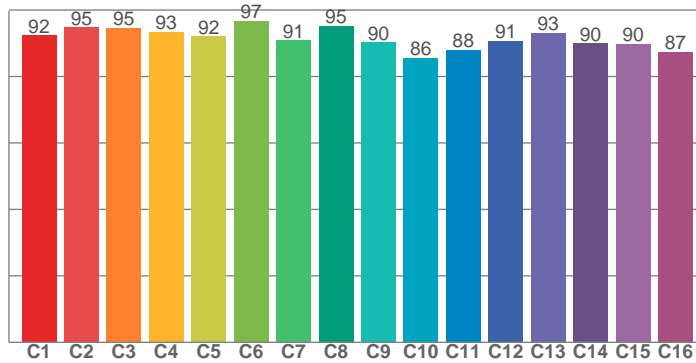

CRI: 95.7 (R1-R8)

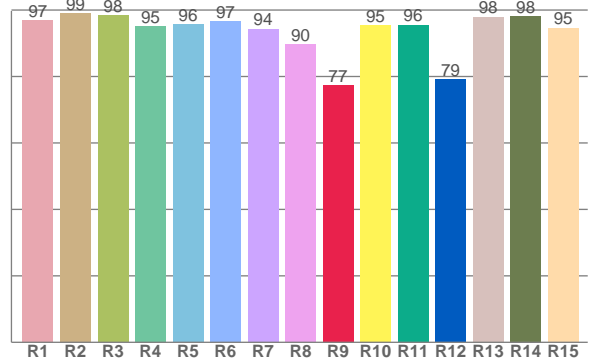

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.0	99.1	98.3	95.2	95.7	96.6	94.4	89.6	77.4	95.5	95.6	79.1	98.0	98.2	94.7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.3	94.8	94.6	93.5	92.1	96.7	90.9	95.2	90.3	85.7	87.9	90.7	93.1	90.0	89.8	87.4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
90.6	96.0	89.9	87.8	90.4	92.8	94.6	94.8	97.9	95.9	95.0	95.2	95.3	92.3	92.0


CQS: 92.7

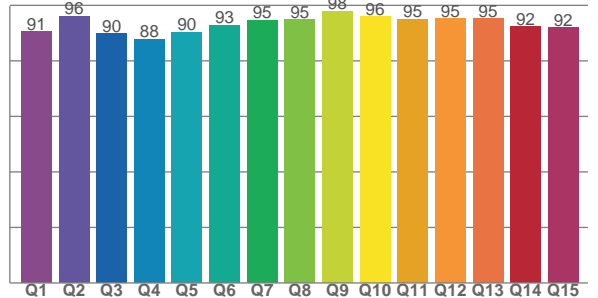

## Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3156 K	95.7	77.4	91.6	98.6	92.7	0.425	0.398	0.246	0.345	-0.0009

## Beam Details

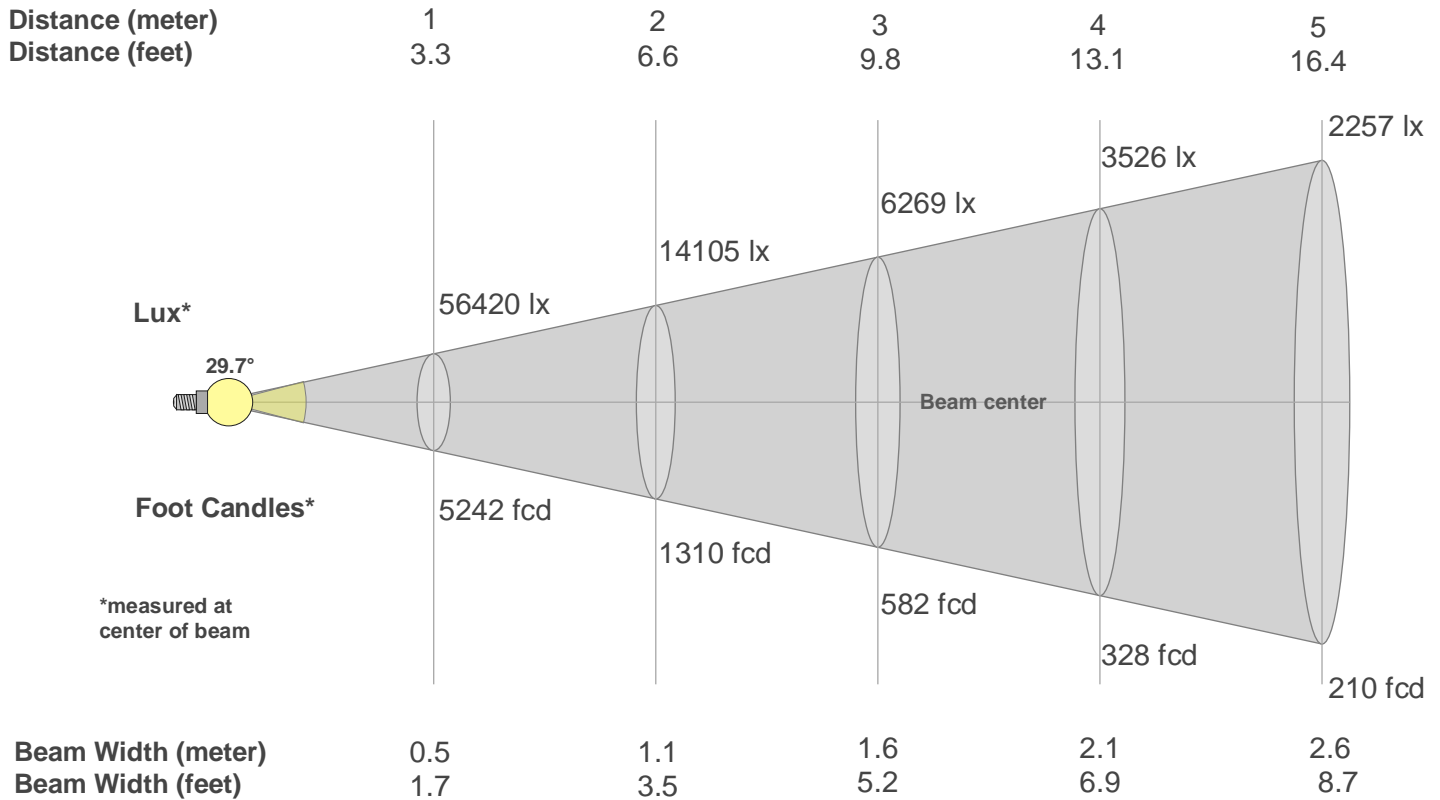

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	56420	14105	6269	3526	2257	1567	1151	882	697	564	466	392	334	288	251	220	195	174	156	141
fcd	5241.6	1310.4	582.4	327.6	209.7	145.6	107	81.9	64.7	52.4	43.3	36.4	31	26.7	23.3	20.5	18.1	16.2	14.5	13.1

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
56.4K	56.4K	55.8K	55.0K	53.2K	51.1K	48.6K	46.1K	43.5K	40.9K	38.4K	35.9K	33.7K	31.7K	29.8K	27.9K	20.1K	10.6K	5.2K	0.9K
100%	100%	99%	97%	94%	91%	86%	82%	77%	72%	68%	64%	60%	56%	53%	50%	36%	19%	9%	2%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
56.4K	56.4K	55.8K	55.0K	53.2K	51.1K	48.6K	46.1K	43.5K	40.9K	38.4K	35.9K	33.7K	31.7K	29.8K	27.9K	20.1K	10.6K	5.2K	0.9K
100%	100%	99%	97%	94%	91%	86%	82%	77%	72%	68%	64%	60%	56%	53%	50%	36%	19%	9%	2%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
56.4K	56.4K	56.0K	55.4K	53.6K	51.8K	49.3K	46.8K	44.2K	41.7K	39.2K	36.8K	34.7K	32.6K	30.5K	26.8K	17.9K	9.8K	4.2K	0.0K
100%	100%	99%	98%	95%	92%	87%	83%	78%	74%	70%	65%	61%	58%	54%	48%	32%	17%	7%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
56.4K	56.4K	56.0K	55.4K	53.6K	51.8K	49.3K	46.8K	44.2K	41.7K	39.2K	36.8K	34.7K	32.6K	30.5K	26.8K	17.9K	9.8K	4.2K	0.0K
100%	100%	99%	98%	95%	92%	87%	83%	78%	74%	70%	65%	61%	58%	54%	48%	32%	17%	7%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
29.7°	35.6°	37.4°	100.0%	100.0%