



8.5W DIMMABLE LED DOWNLIGHT

**PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION
LEAVE A COPY FOR THE USER / MAINTENANCE ENGINEER FOR FUTURE REFERENCE**

IMPORTANT INSTALLATION INFORMATION

- Installation should be carried out in accordance with the latest edition of the National Wiring Regulations. If in doubt, consult a qualified electrician.
- These luminaires are for indoor use only.
- IP65 rated luminaires and are protected against dust and jets of water. They are suitable for installation in locations containing a bath or shower where water jets are likely.
- Module for use with AU-BZ108 fixed bezel(not included) or AU-BZ109 adjustable bezel(not included).
- 350mA LED driver required, 9W minimum (not included)




This luminaire is not suitable for covering with insulation material.

INSTALLATION INSTRUCTIONS

1. Before commencing installation or maintenance ensure that the electrical supply is isolated at the distribution board.
2. Select the required position for the luminaire ensuring that the clearances shown in Fig 1. are observed. Beware of joists, water pipes and electric cables. Please note these are class 3 luminaires and must not come into contact with any earthed metal.
3. Cut-out detail = 80mm Ø
4. Connect the mains supply to the LED driver:
Brown – Live Blue – Neutral, Green/Yellow – Earth (connection for Earth continuity).
Connect the module to the output of the LED driver Red +VE, Black -VE
5. Clip the module into the downlight bezel.
6. Put the LED driver into the ceiling cut-out and position it at least 100mm from the downlight. Slide the legs of the mounting spring clips into the ceiling cut-out and push the luminaire up into the aperture. Ensure that it is securely located.
7. Switch on the power supply.

FIG 1.

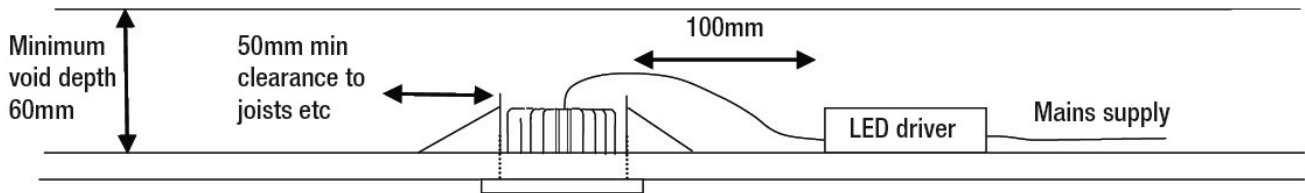

Environmental Protection (W.E.E.) – Aurora's WEEE Reg.No. WEE/BG0130YX(UK Only)



Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking (left) must not be disposed of with other household or commercial waste. Aurora does not levy any WEEE disposal charges to its customers for affected WEEE related products. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice. If, when you purchased any Aurora product, your supplier included a WEEE disposal fee, you should then contact your supplier for advice on his takeback of the product for the correct disposal.

WARRANTY

See www.auroralighting.com for full details of guarantees and Extended Warranty Terms and Conditions. The warranty is invalid in the case of improper use, tampering, and removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the National Wiring Regulations. Should this product fail during the warranty period it will be replaced free of charge, this is subject to correct installation and return of the faulty product. Aurora does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Aurora reserves the right to alter specifications without prior notice.



DOWNLIGHT LED GRADABLE 8.5 W

VEUILLEZ LIRE ATTENTIVEMENT CES INSTRUCTIONS AVANT L'INSTALLATION
LAISSEZ UNE COPIE POUR L'UTILISATEUR / LE TECHNICIEN DE MAINTENANCE POUR TOUTE CONSULTATION
ULTÉRIEURE

INFORMATION IMPORTANTE CONCERNANT L'INSTALLATION

- L'installation doit être effectuée conformément à la dernière édition des Réglementations de câblage nationales. En cas de doute, consultez un électricien qualifié.
- Ces luminaires sont exclusivement destinés à une utilisation en intérieur.
- Les luminaires IP65, sont protégés contre la poussière et les projections d'eau. Ils peuvent donc être installés dans des lieux avec baignoire ou douche, où il est possible y avoir des projections d'eau.
- Module destiné à une utilisation avec collerette fixe AU-BZ108 (non incluse) ou collerette orientable AU-BZ109 (non incluse).
- Driver LED 350 mA nécessaire, 9 W minimum (non inclus).




Ce luminaire ne peut pas être recouvert de matériau isolant.

NOTICE D'INSTALLATION

1. Avant de commencer l'installation ou la maintenance, assurez-vous que l'alimentation électrique est coupée au compteur.
2. Choisissez la position souhaitée du luminaire, en vous assurant que les distances indiquées sur le schéma 1 sont bien respectées. Faites attention aux poutrelles, aux conduites d'eau et aux câbles électriques. Attention ces luminaires étant de classe 3 ceux-ci ne doivent jamais se retrouver en contact avec un métal mis à la terre.
3. Diamètre d'encastrement = Ø 80 mm
4. Connectez le secteur au driver LED:
Marron – Phase Bleu –neutre, Vert/jaune – terre (connexion pour la continuité de la mise à la terre).
Branchez le module à la sortie du driver LED, Rouge/positive, noire/négative
5. Clipsez le module dans la collerette du downlight.
6. Placez le driver LED dans le trou du plafond, et positionnez-le à au moins 100 mm du downlight. Faites coulisser les pattes des attaches à ressort dans le trou du plafond, et poussez le luminaire vers le haut afin de le faire rentrer dans l'ouverture. Assurez-vous qu'il est correctement installé.
7. Allumez l'alimentation électrique.

Schéma 1

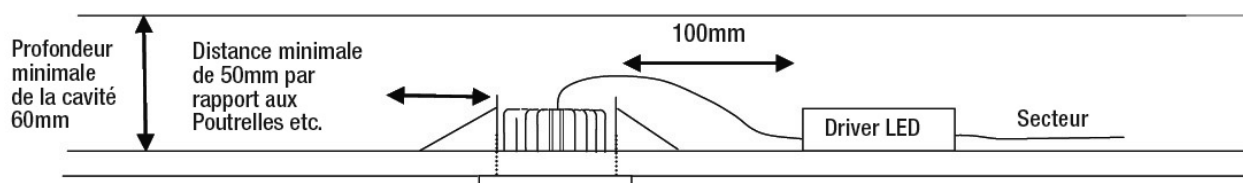

Protection de l'environnement (D.E.E.E.) – N° d'inscription DEEE d'Aurora en Grande-Bretagne WEE/BG0130YX (Royaume-Uni uniquement)



Les Règlements relatifs aux déchets d'équipements électriques et électroniques (DEEE) exigent que nos produits portant ce marquage (à gauche) ne soient pas jetés avec d'autres ordures ménagères ou déchets commerciaux. Afin de prévenir tout risque pour l'environnement ou la santé publique, veuillez ne pas jeter ce type de produits avec les autres déchets et le recycler de manière responsable auprès de vos installations locales. Veuillez vous rapprocher des autorités compétentes, des centres de recyclage ou de votre distributeur pour des conseils concernant le recyclage de ces produits.

GARANTIE

Voir www.auroralighting.com pour plus de détails sur les garanties et les conditions d'extension de garantie. La garantie n'est pas valable dans le cas d'une mauvaise utilisation, d'une mauvaise manipulation, de l'élimination de l'étiquette de traçabilité avec la date, de l'installation dans un environnement de travail inapproprié ou de l'installation ne suivant pas le règlement national en vigueur. Si ce produit a une défaillance durant la période de garantie, il sera remplacé gratuitement, cela est sujet à une installation correcte et le retour du produit défectueux. Aurora n'accepte aucune responsabilité pour tous les coûts d'installation liés au remplacement de ce produit. Cette garantie s'ajoute aux droits légaux dans votre pays d'achat. Aurora se réserve le droit de modifier les spécifications sans préavis.