



DESIGNLIGHT

SCANDINAVIAN AB

Art nr: **P-820B**



E-nr: **74 746 45**

Effekt Power	Material Material	Färgtemperatur Color temperature	Armaturfärg Fixture color	Anslutning Connection	Ljusflöde Luminous flux
20W	Aluminium	3000K	Matt Black	230V	1800lm

CE, RoHS, IP CERTIFIED BY SGS


LED	LED Driver 500mA LED 18W			1800 lm	6316 cd			L ₇₀
	IP20	H 165 mm			30.000	CE	RoHS	Färg temp. 3000K

- Dimbar med 500 mA driver
- 90 lm/w med lins, driver
- 105 lm/w utan lins, driver
- CRI Värde >90
- Dimmable with 500 mA driver
- 90 lm/W with lens, driver
- 105 lm/W without lens, driver
- CRI value > 90

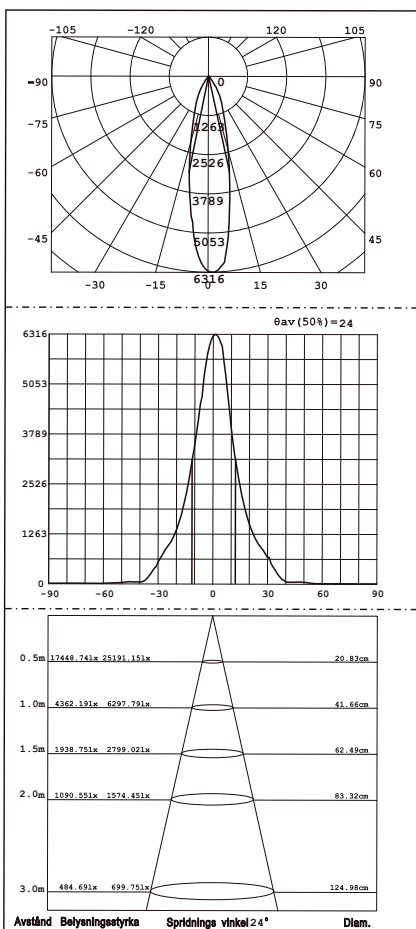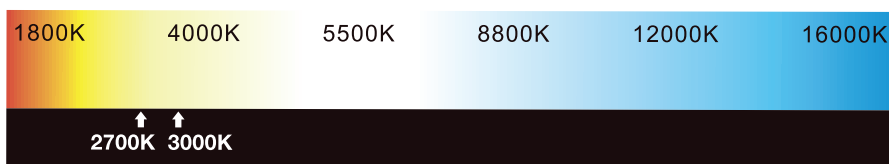


1. Stäng av strömmen/Turn off the power


2. Turn the switch to unlock position to conceal the metal contacts on adaptor, before install the spot light into track.

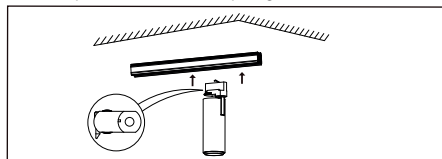


3. Turn the switch clockwise to lock the adaptor, after inserting the spot light into track.

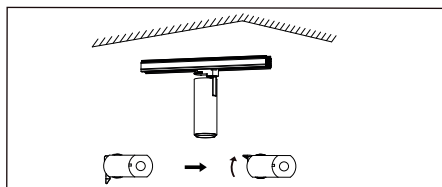

4. Turn the phase selector to the correct phase number. Sequence is 1->0->3->0->2; 0 for void.

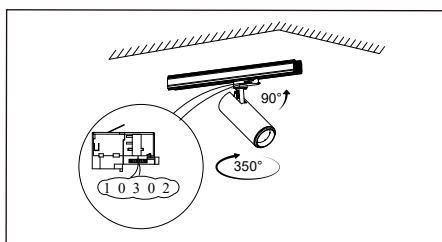

Mått/Dimension

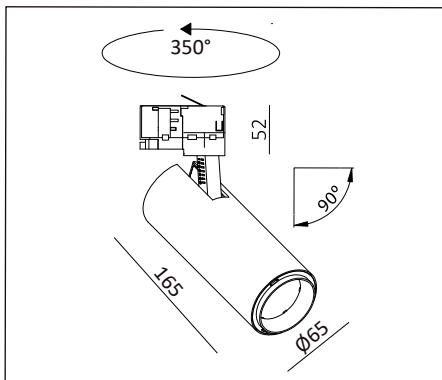

This luminaire contains built-in LED lamps.



LED

The lamps cannot be changed in the luminaire.



874/2012

Komihåg vid montering av downlight LED

Kontrollmät **ALLTID** diametern före håltagning i tak. Antal watt per lampa x antalet lampor ger storleken på transformator. Vid installation av LED följ **ALLTID** kopplingschema.

OBS! Det är olika transformatorer på LED och halogen.

- 1-2W/kvm vid mjukare belysning normal takhöjd.
- 3-4W/kvm vid allmän belysning normal takhöjd.

LED är:

- Miljövänlig och energisnål.
- Lång livslängd, 20.000-50.000 timmar.
- Låg värmeutveckling, stötsäker.

Trivs bäst i kyla, ju lägre temperatur och god luftarea desto bättre ljuseffekt. För ökad livslängd på LED-lampor bör armaturer med kylfläns användas.

Tänk på att **ALDRIG** montera downlight direkt mot lättantändligt material. Desto mer luftarea runt den monterade downlighten, desto säkrare blir installationen. Ökad luftarea ger längre livslängd på ljuskälla och armatur.

Things to remember when installing LED downlights

ALWAYS measure the diameter prior to perforation in ceiling. The amount of Watt per light times the number of lights equal the size of transformer. During installation of LED, **ALWAYS** adhere to the circuit diagram.

N.B. Transformers differ for LED and halogen.

- 1-2W/square meter for softer lighting and standard ceiling height.
- 3-4W/square meter for ambient lighting and standard ceiling height.

LED is:

- Environmentally friendly and energy efficient.
- Long life expectancy, 20 000-50 000 hours.
- Low heat generation, shock resistant.

LED lights perform at best in cold, the lower the temperature and the more air volume, the better the light output. For increased longevity on LED lights, fixtures with heat sinks should be used.

Remember to **NEVER** install a downlight directly adjacent flammable materials. Sufficient air volume surrounding the installed fixture provides a safer installation. Increased air volume increases life expectancy for both light source and fixture.

www.designlight.nu



DESIGNLIGHT
SCANDINAVIAN AB

Designlight Scandinavian AB | Toffelvägen 1 | SE-342 60 Moheda

Kundcenter: Telefon 0472-716 10 | Fax 0472-716 09 | info@designlight.nu | www.designlight.nu