


FREEROLLER

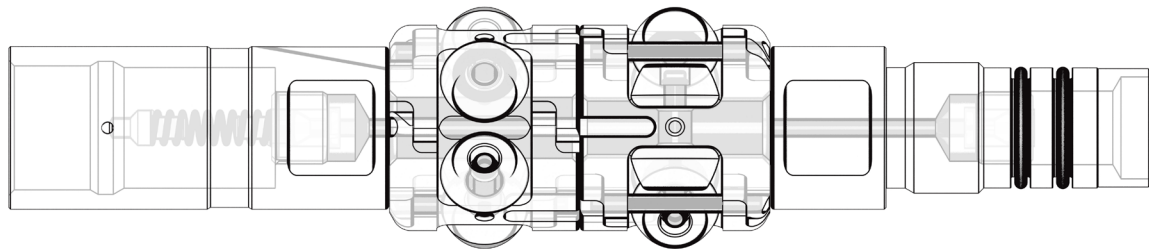

- Minimises wellbore friction
- Enables access to deviation greater than 80°
- Provides tool lift
- Highly debris tolerant

The Oilenco Freeroller has been designed to assist with reaching target depths in highly deviated wells. The tool provides a low friction addition to both slickline and E-line tool strings, ensuring target depths can be achieved.

The tool is available with a range of interchangeable roller assemblies, sized specifically to meet operational requirements. The E-line version offers a single through bore mandrel

with no internal connections, which ensures a high pressure rating is maintained. A compact, ballistic proof, gun roller version is available for perforating operations.



oilenco