




OneDrift

oilenco

ONE DRIFT

2014 ICoTA INNOVATION AWARD

- Potential to save multiple runs
- Wellbore ID confirmed in single run
- Provides depth correlation

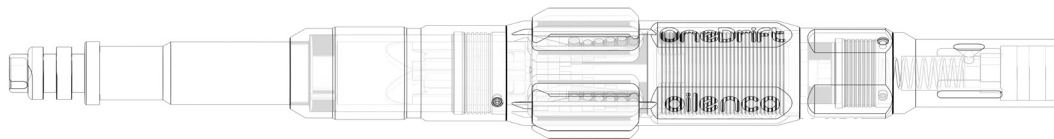

The Oilenco One Drift is a simple, yet effective solution to well bore drifting.

The device is run into the well on wireline, tractor or coiled tubing.

When the tool encounters a restriction within the well, jar action or downward force is applied.

This reduces the tools outer diameter in 0.100" increments, allowing access beyond the restriction.

The same process is applied to overcome further restrictions within the wellbore, allowing the target depth to be achieved in a single run.

Upon tool retrieval the drift diameter is measured to verify the minimum well bore restriction.

NOMINAL SIZE IN

REDUCTION RANGE IN

WEIGHT KG

LENGTH IN

7.0
5.5
4.5
3.5

6.000 - 4.700
4.800 - 3.800
3.900 - 2.900
3.000 - 2.400

39
19
14
10

37
27
27
27