

## Diesel Trash Pump 2",3" & 4"







## Diesel

The Impeller is made from a Hi-Chrome and surrounded by an FCD Volute. The mechanical seal is SIC Silicon carbide for long life and trouble free pumping.

The unit is powered by a Hatz Engine with recoil start Electric start optional extra

The pump is supplied with a trash type strainer and hose coupling sets.

And it all come beautifully bundled in a crash frame to protect the set on site.

This pump is ideal for farm and construction duties, civil defence and emergency pumping duties. Supplied in Frame and Wheel Kit


Solids handling up to:

2" - 20mm

3" - 27mm

4" - 30mm



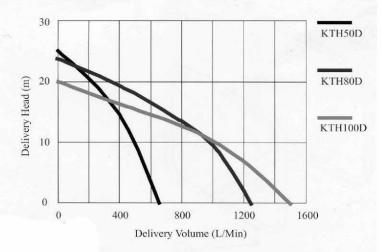

	Model	КТН-50Н	КТН-80Н	KTH-100H
	Weight	47kg (57kg with wheel kit)	58kg (68kg with wheel kit)	78kg (88kg with wheel kit)
	Туре	Self-priming CENTRIFUGAL PUMP		
Pump	Diameters (suction -Discharge)	2"x2"	3"x3"	4"x4"
	Total Head	25m 83ft	24m 80ft	20m 66ft
	Maximum Delivery Volume	650€/min 171GPM	1250€/min 330GPM	1550€/min 410GPM
	Maximum Suction Lift	26ft (8m)		
	Mechanical Seal	Mechanical Seal (silicon carbide)		
Engine	Туре	4-stroke, single cylinder		
	Model	1B20	1830	1840
	Displacement cylinder (€)	0.243	0.347	0.462
	Fuel	Diesel		
	Fuel tank capacity	3	.5	5
	Starting system	Recoil (Optional Electric Start)		
	Naise Level db @ 7m	102db	102db	102db
Dimentions (mm)	A	800	800	1000
	В	565	565	672.5
	с	1150	1150	1350
	D	715	715	820
	E	500	500	500
	F	695	695	690

