


DEHUMIDIFIER

DH 92



FUNCTIONING DIAGRAM

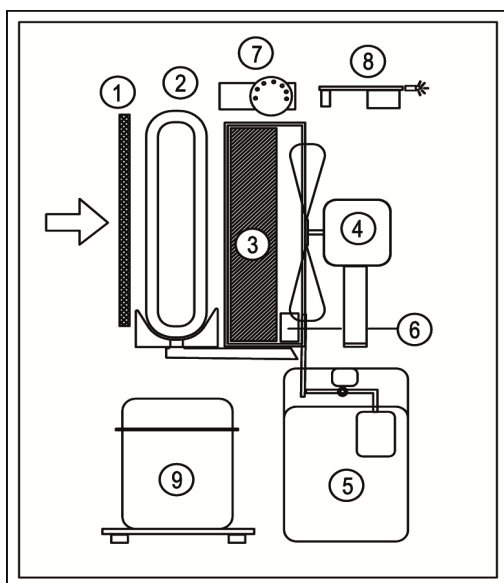

1	:	Filter
2	:	Evaporator
3	:	Condenser
4	:	Fan
5	:	Tank
6	:	Switch
7	:	Moisture gauge
8	:	Electronic board
9	:	Compressor

TECHNICAL DATA

Functioning Relative Humidity Range	%	35 - 99
Functioning Temperature Range	°C	3 - 35
Air Flow	m³/h	1000
Rated Condensation Capacity (30°C UR 80%)	l/24h	80
Type of Refrigerant Gas	type	R410A
Quantity of Refrigerant Gas	g	820
Voltage Power Supply	V	220-240
Frequency Power Supply	Hz	50
Power Consumption (35°C UR 99%)	W	1600
Absorbed Current (35°C UR 99%)	A	7,1
Sound Pressure Level (at 3 mts)	dBa	50
Capacity of Condensed Water Tank	l	11
Weight	Kg	66

PACKAGING

Dimensions packing	mm	650 x 772 x 1132
Dimensions utilization	mm	580 x 600 x 1035
Pieces for Europallet	n°	1
Pieces full truck	n°	120

PERFORMANCE

