

INTEGRATION CONSIDERATIONS

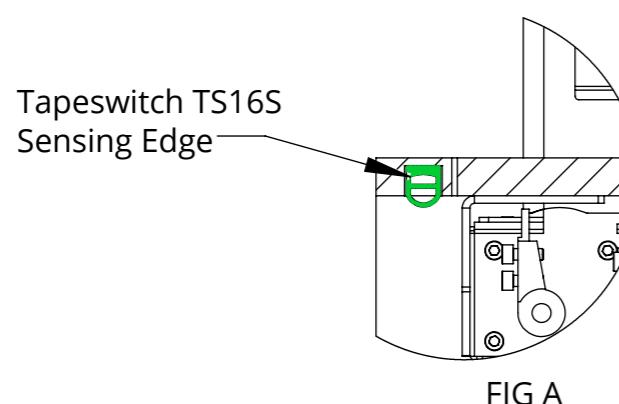


FIG A



High Risk - Crushing

Crush hazard at the cabinet aperture when mechanism is opening.



Mitigation

The cabinet top should be floating on locator dowels to allow vertical movement if an obstruction is caught between it and the base panel.

A tapeswitch is another useful method to prevent fingers getting crushed (see Fig A).




High Risk - Crushing

Crush hazard below the mechanism when mechanism is closing.



Mitigation

Ensure area below the mechanism is kept clear at all times when the mechanism is being used. If installing or maintaining the mechanism do so with the mechanism turned off.

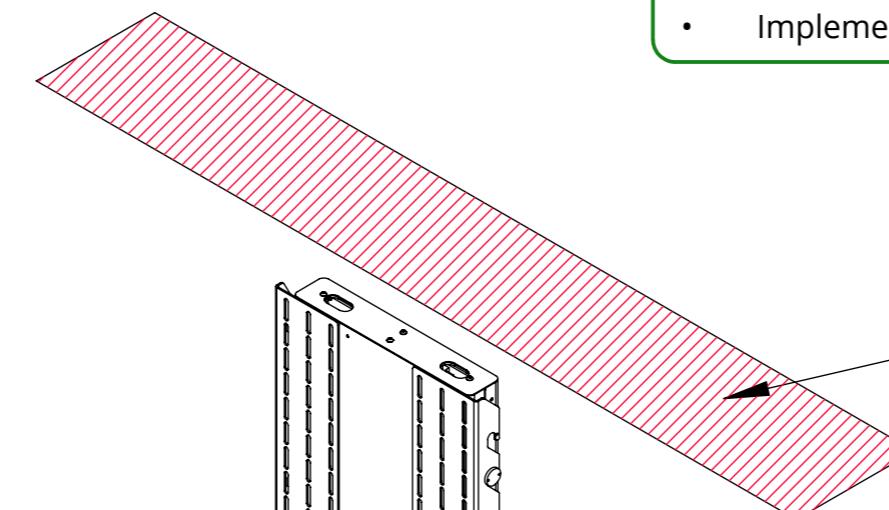


High Risk - Mechanism Damage Hazard

Items left above the mechanism can be crushed and/or cause damage to the mechanism as it opens.



Mitigation

Ensure the area above the mechanism is kept clear at all times when operating. See also general mitigations.

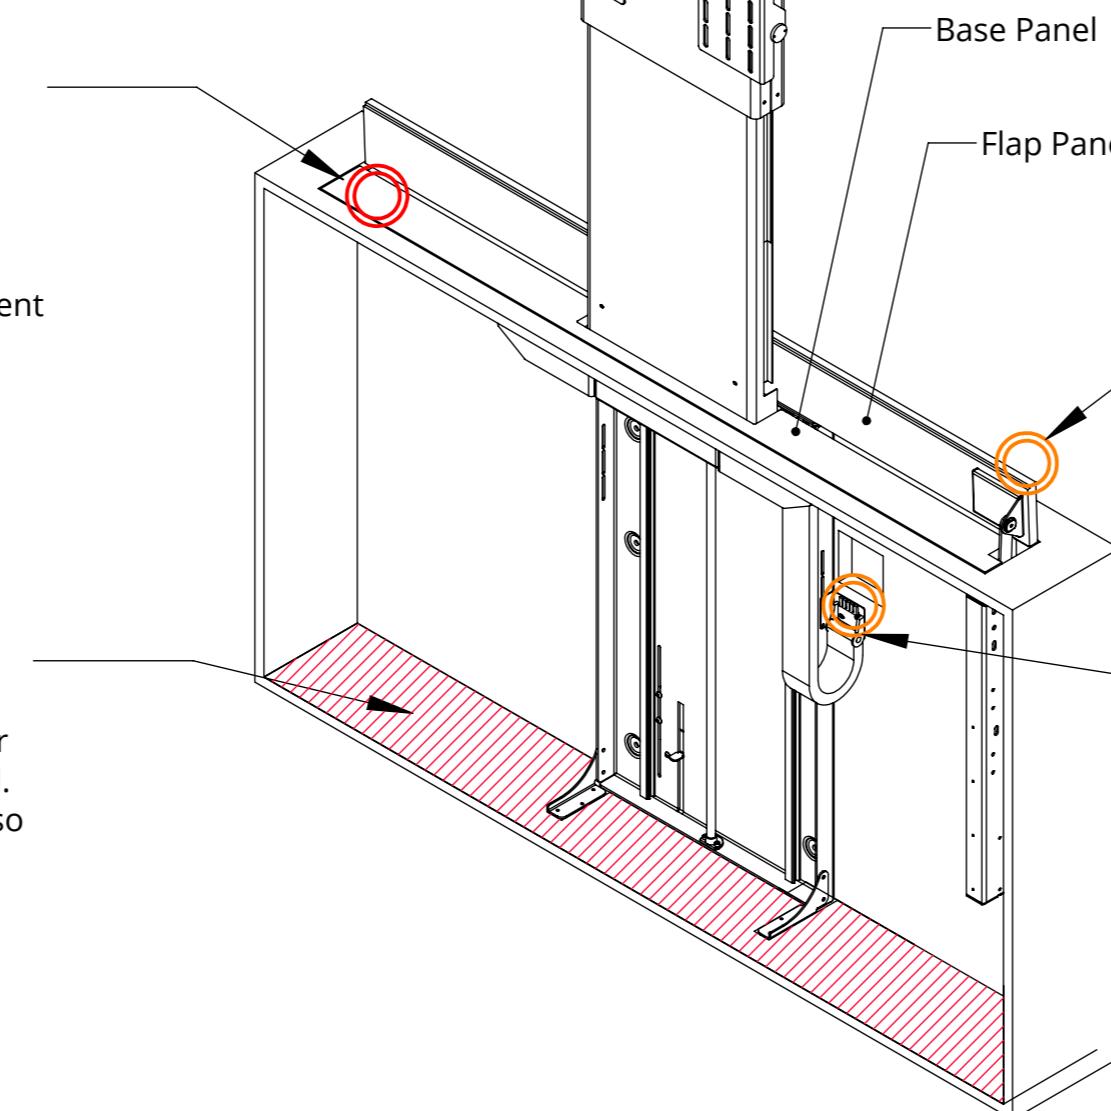

Low Risk - Falling Objects

Falling object hazard if objects are left on top of the flap panel.



Mitigation

See general mitigations.



Low Risk - Crushing

Cables could be snagged if not properly managed through and around the mechanism, causing damage to the mechanism and electronics.



Mitigation

Ensure sufficient cable slack is allowed around movement joints to prevent stretching and/or damage to the cables and/or mechanism.