



LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP

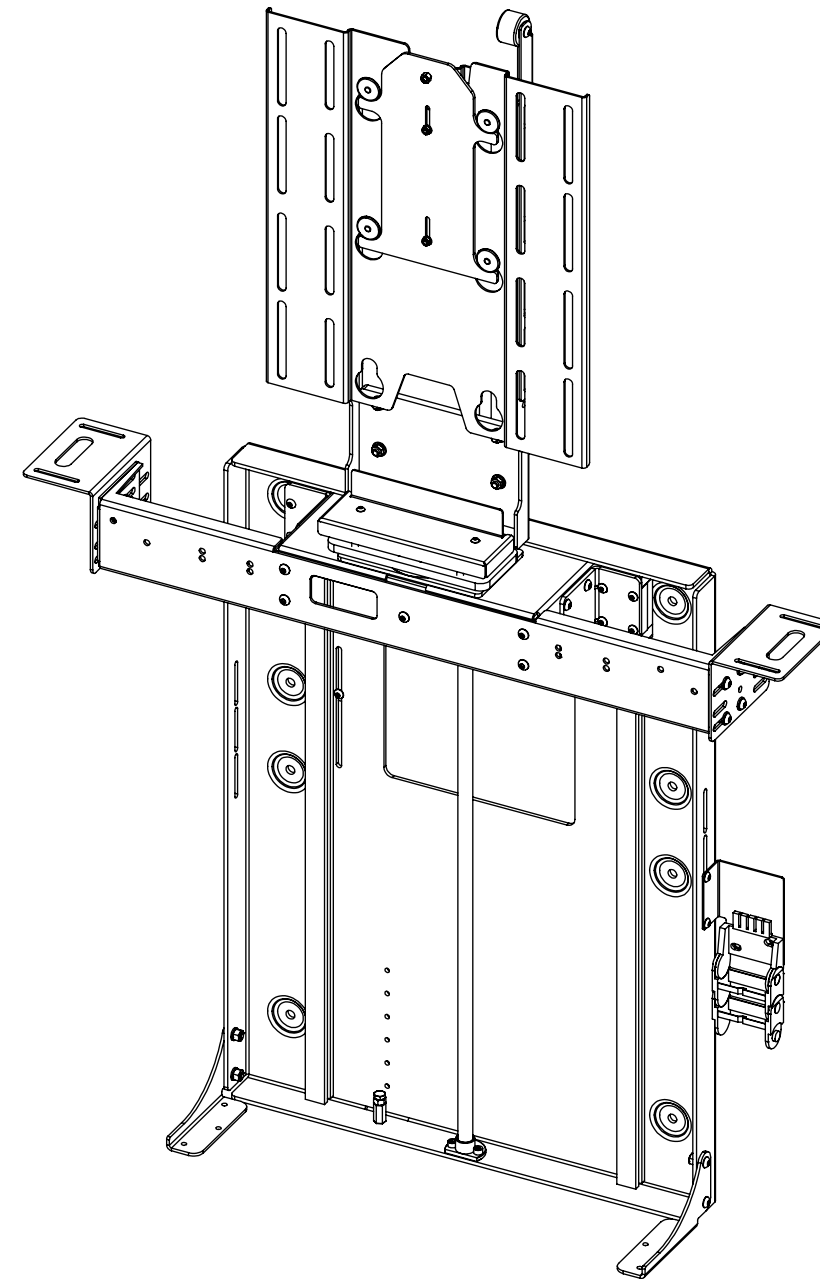

future automation

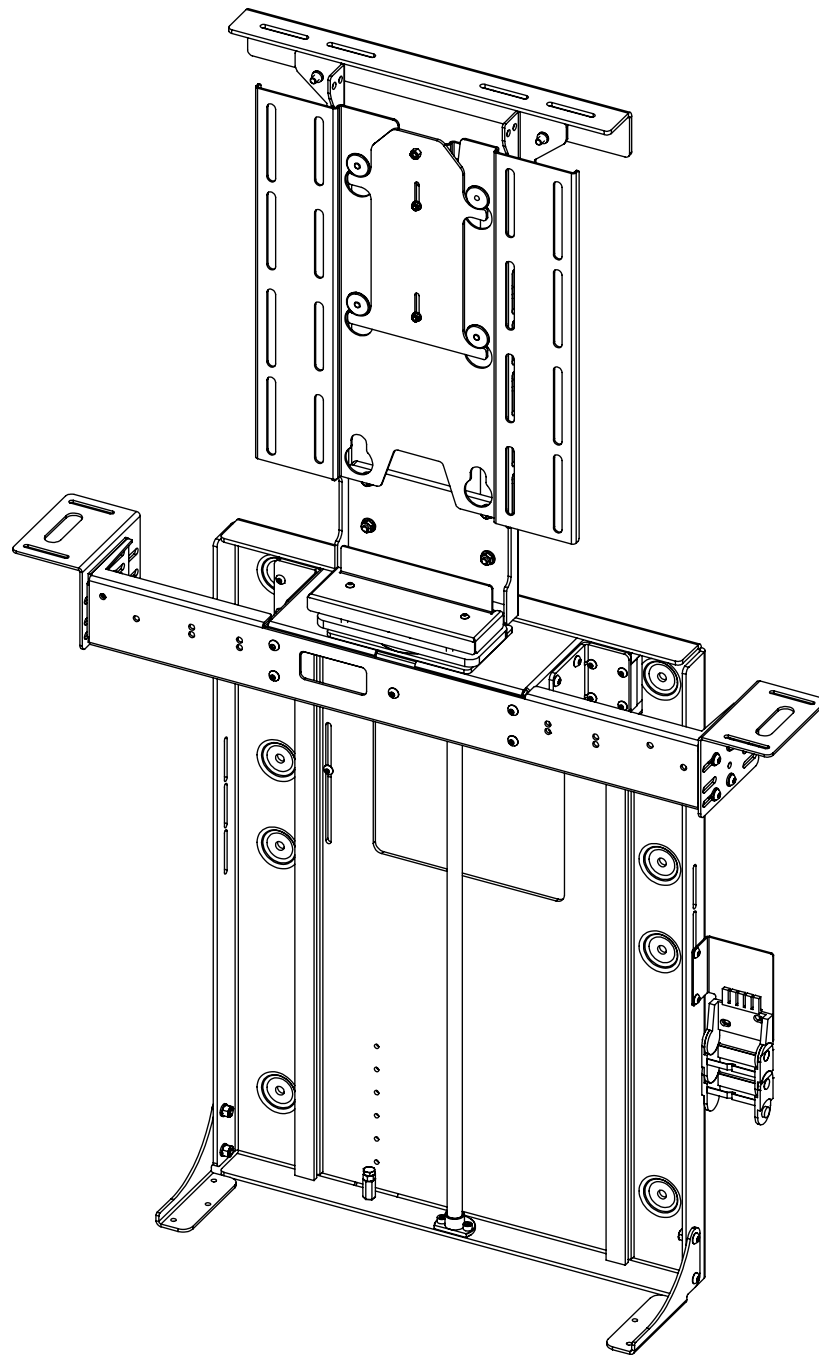

LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP



future automation

SPECIFICATION	MEASUREMENTS
Maximum Screen Height	545mm (21 7/16")
Maximum Lifting Capacity	50Kg (110lb)
Maximum Lifting Capacity (Marine)	30Kg (66lb)
Internal Cabinet Height	694mm (27 5/16")
Decibel Rating	52 dB
Packaging Dimensions	955 x 850 x 330mm (37 5/8" x 33 7/16 x 13")
Shipping Weight	35Kg (77lb)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption	250 - 500W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 400, 300, 200 W x 400, 300, 200 H
Control Options	IR Remote, RS232, Contact Closure, RF Available
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, IR remote control, Push Flap Kit, Box Enclosure Kit
Marine Suitable	Yes

LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP




future automation

CABLE ROUTING


The LSM has an easily removable Mount Cover that cables from the screen can be routed underneath. Cables then travel through the centre of the Mount Boss and into the beam. Cables must be routed carefully to prevent any interference with the LSM beam as it operates.

Screen and Mechanism cables should be routed to a control box outside of the cabinet via an opening in the back of the cabinet or a conduit leading to the bottom.

- SCREEN CABLES
- MECHANISM CABLES
- POWER CABLE

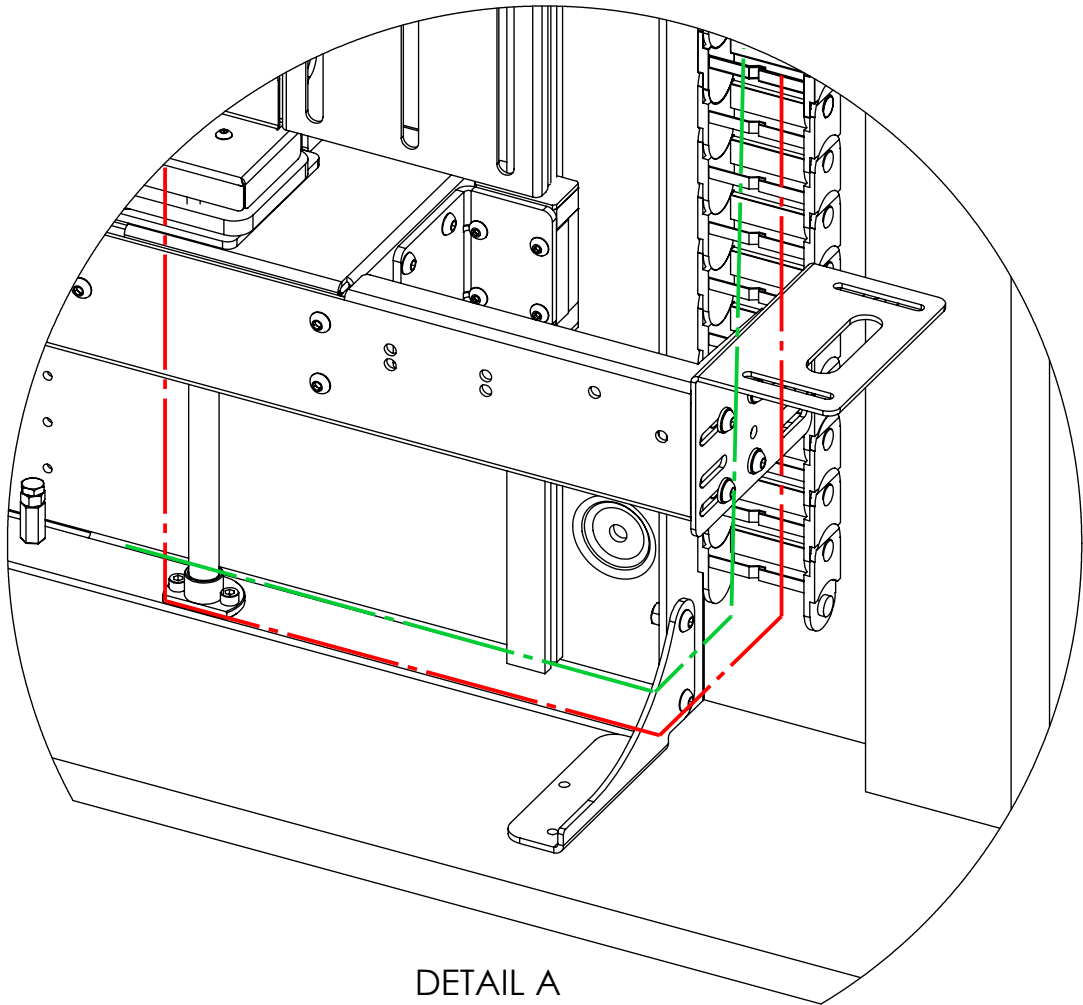

DETAIL A

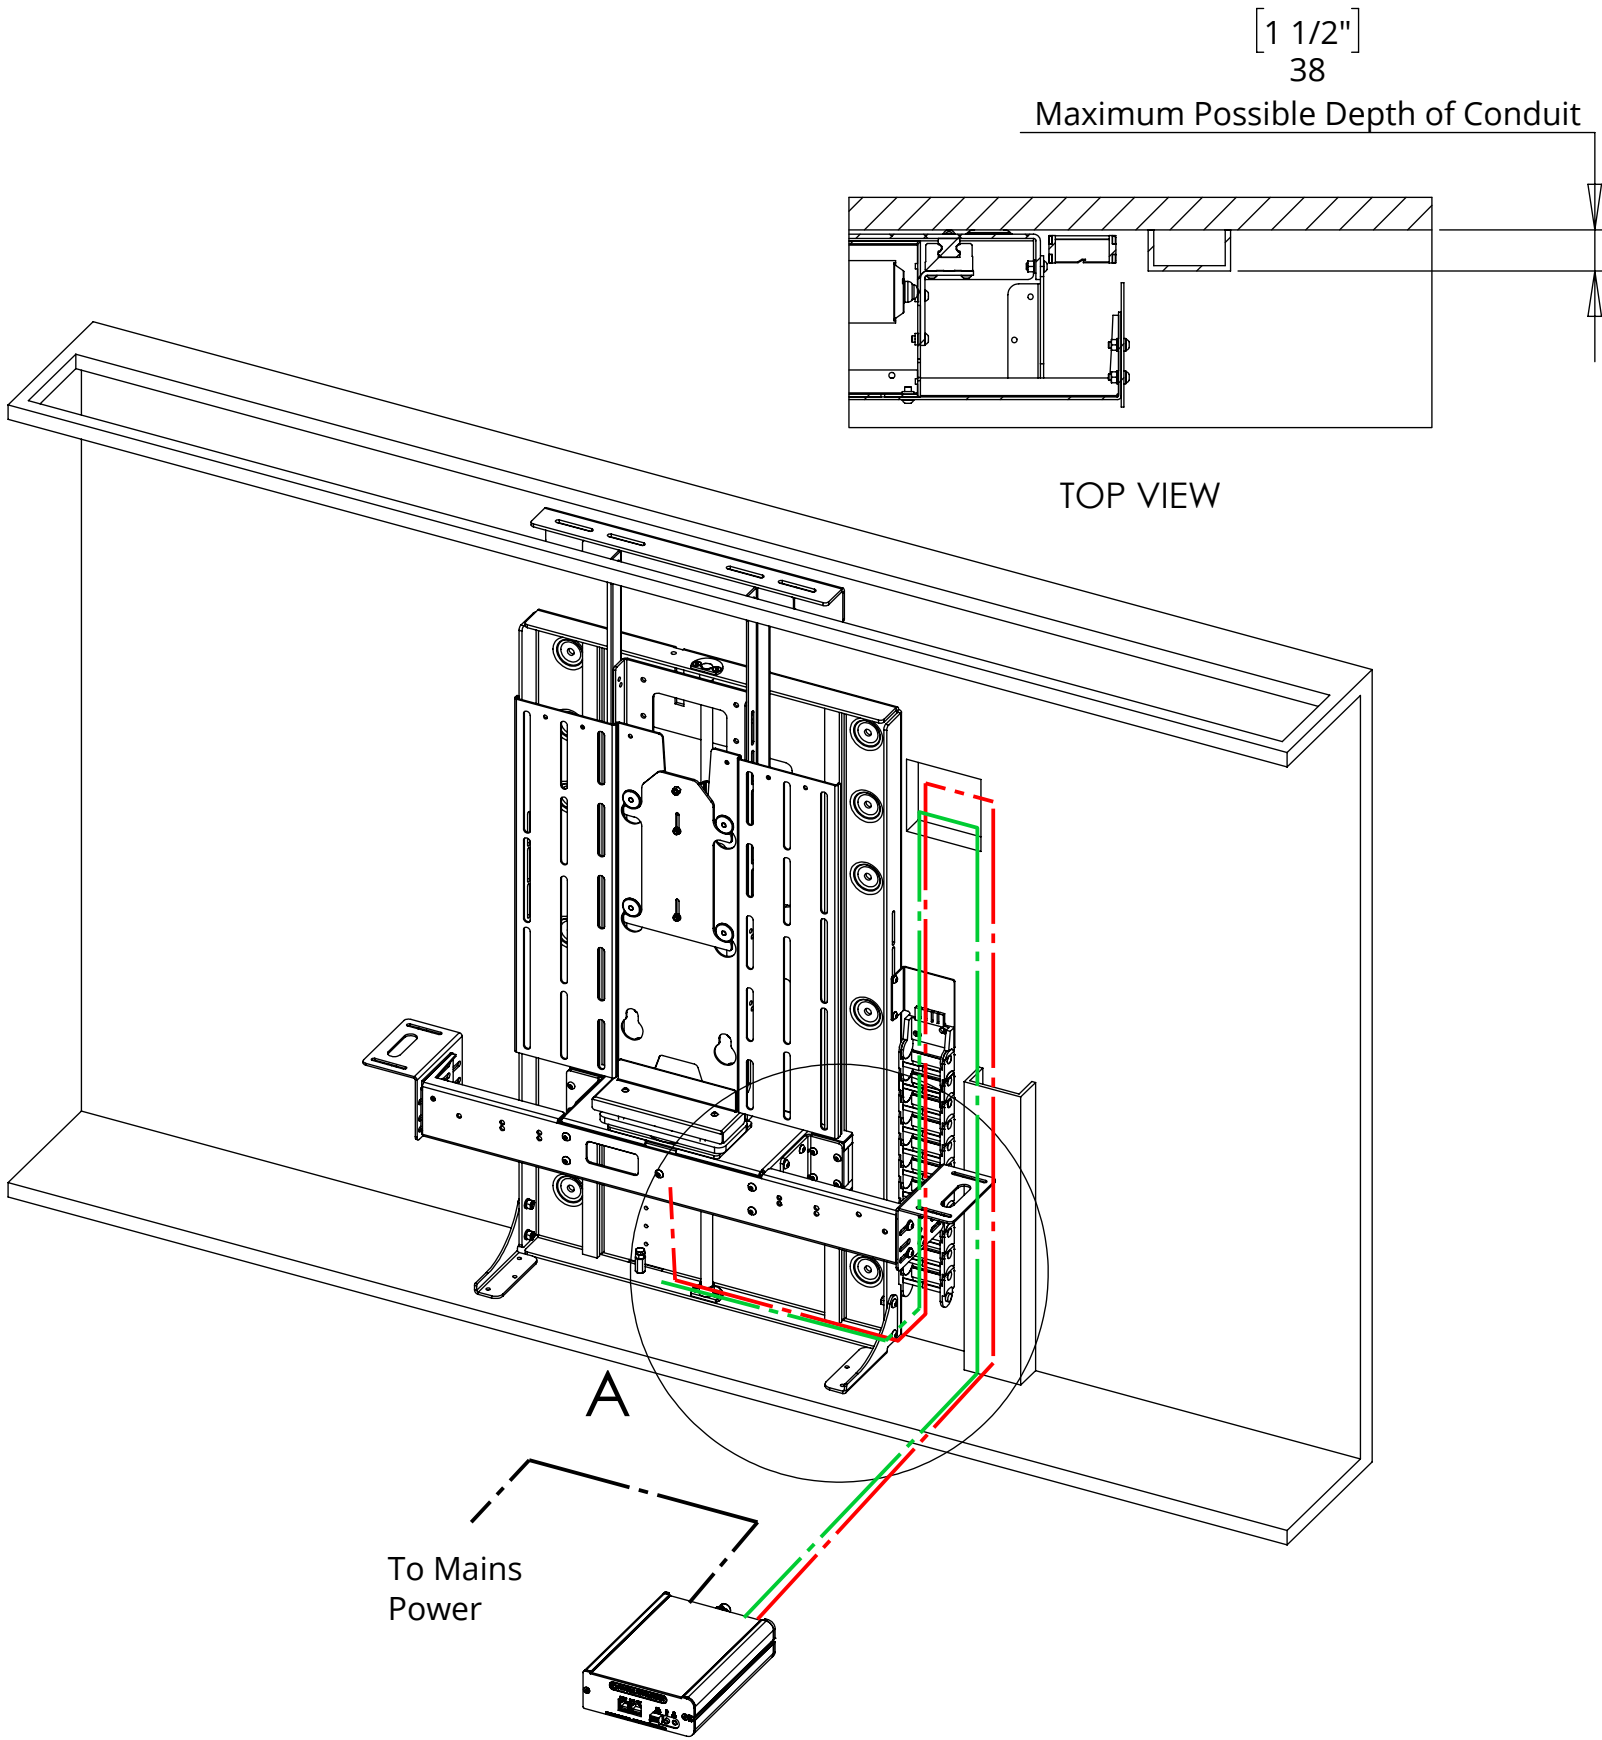

LSM-BE/PF 2


LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP



future automation

LSM-BE 2 - MECHANISM UP - IN CABINET

Aperture Depth =
Screen Depth + 83 [3 1/4"]
(Minimum 121 [4 3/4"])

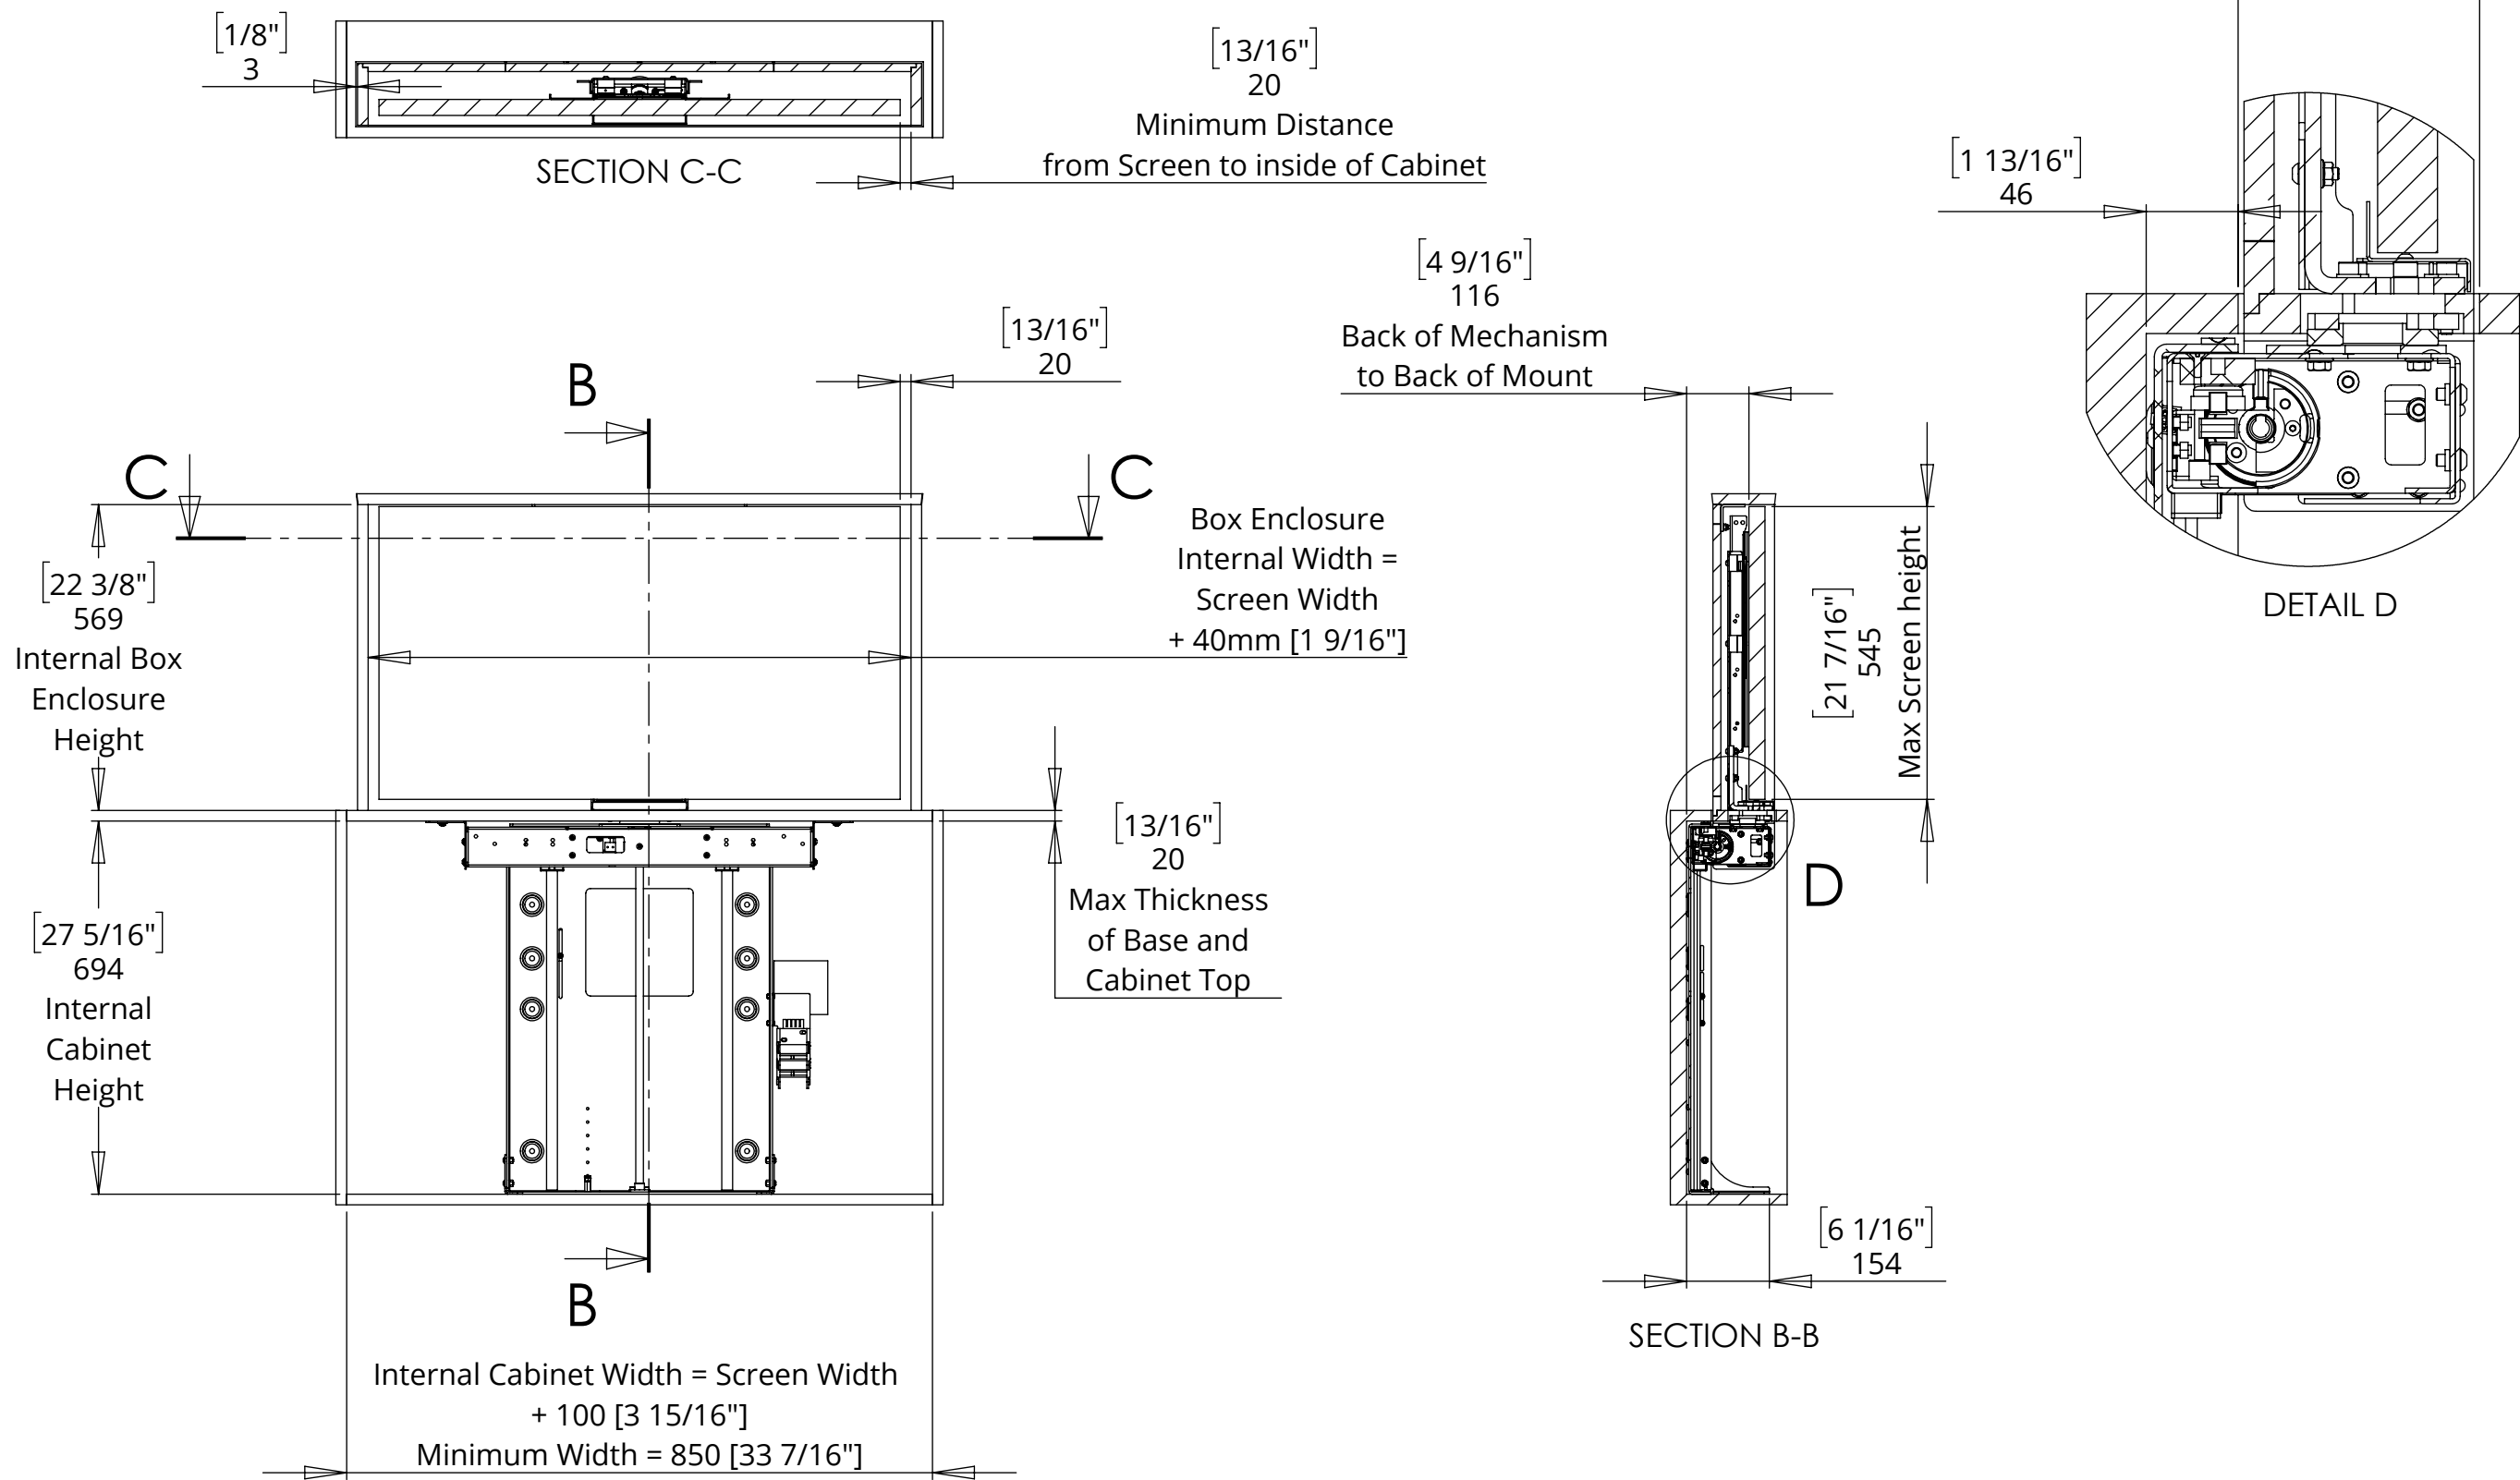

LSM-BE/PF 2



LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP





future automation

LSM-BE 2 - MECHANISM DOWN - IN CABINET

Shown with tapered Box Enclosure Lid in square Cabinet Aperture.
A tapered Cabinet Aperture can be used to improve the fit.

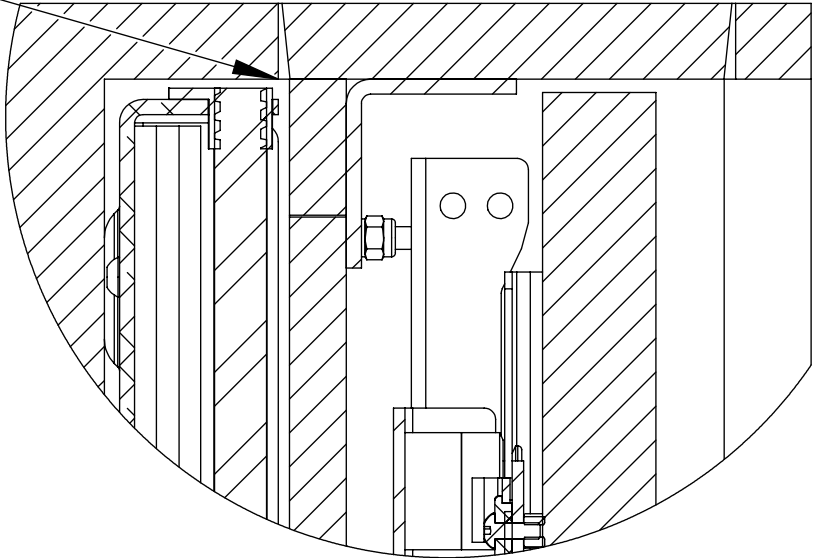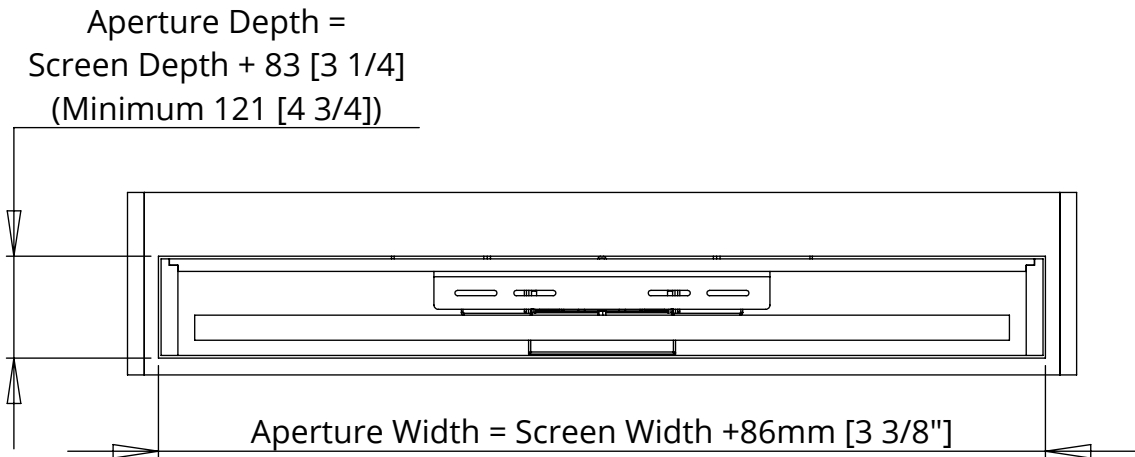

DETAIL F

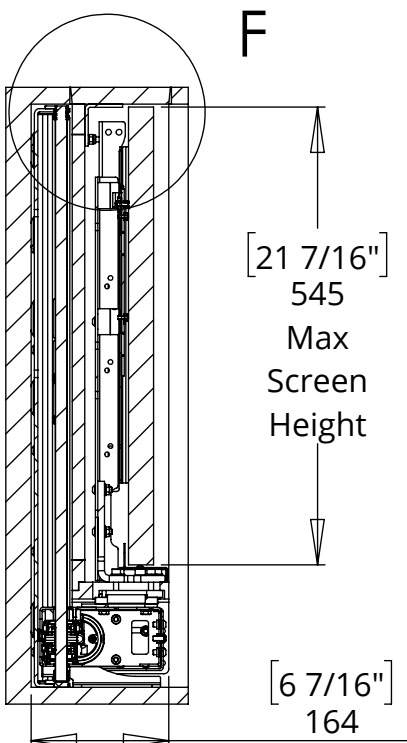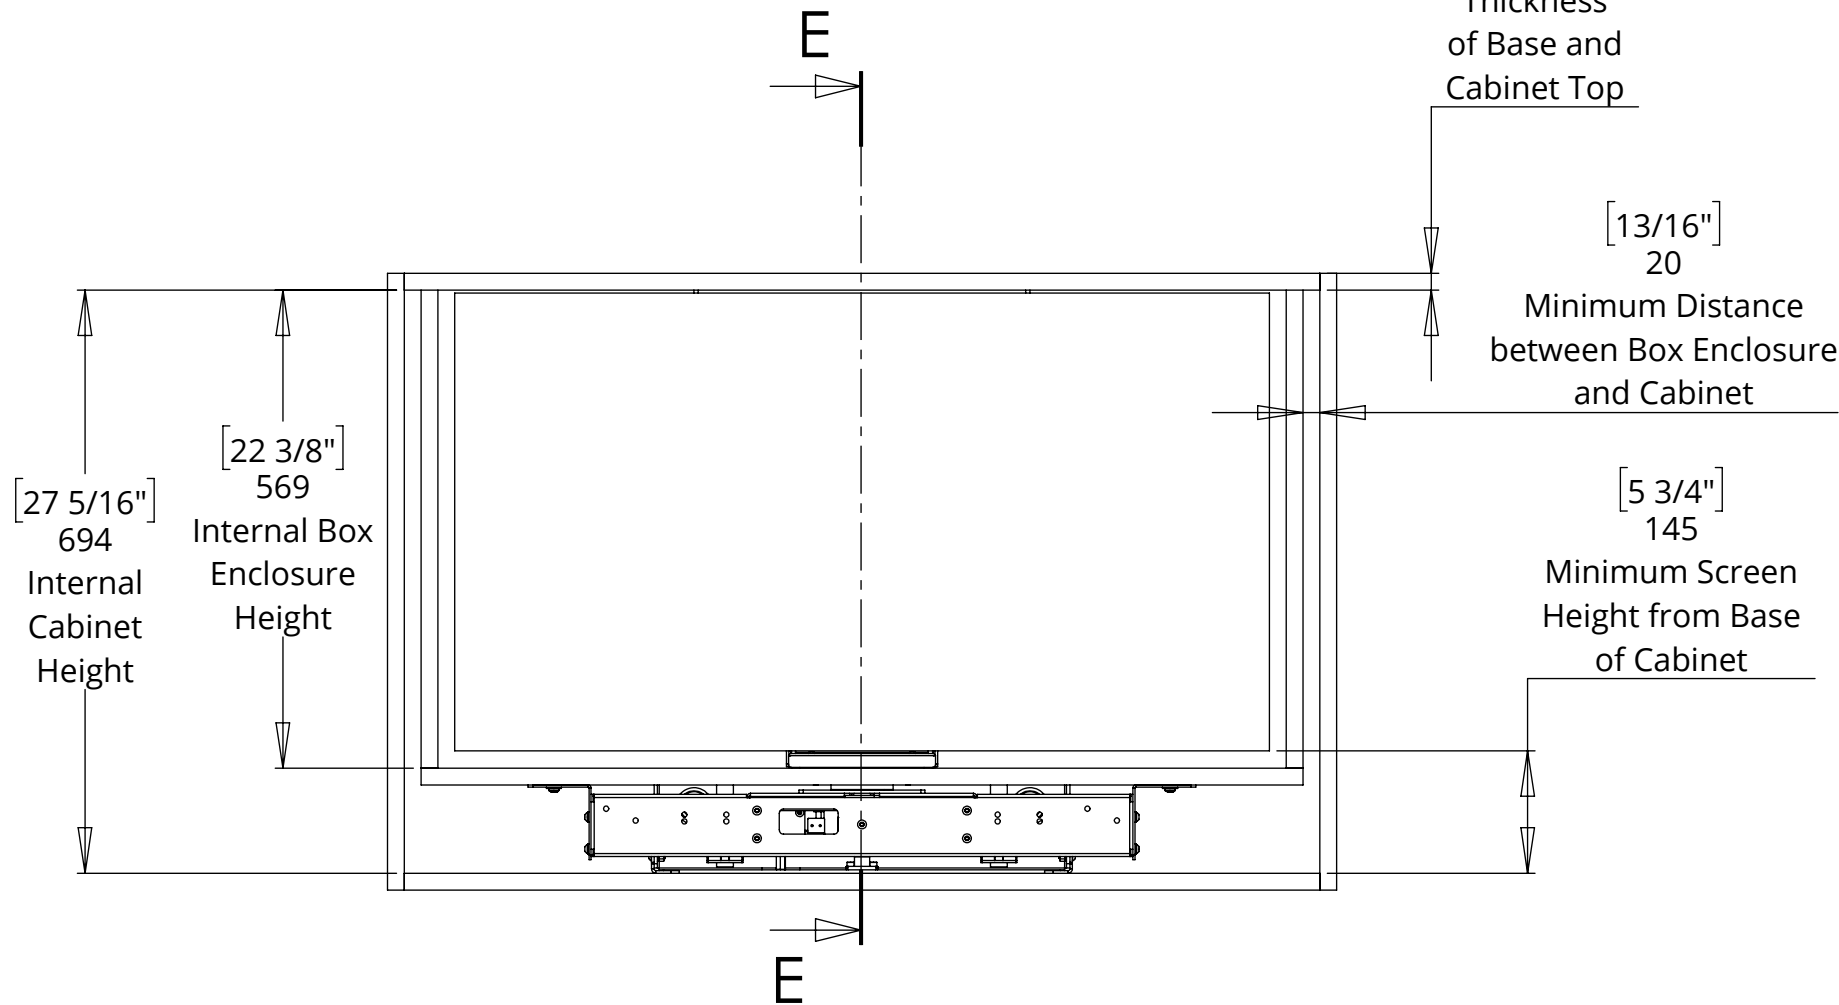

SECTION E-E

LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP





future automation



NOTE: A tapered Box Enclosure Lid creates a good fit in the Cabinet Aperture and helps the Box Enclosure to locate within the cabinet.

BOX ENCLOSURE BASE PANEL AND LID DETAILS



BOX ENCLOSURE LID (TAPERED) TOP VIEW

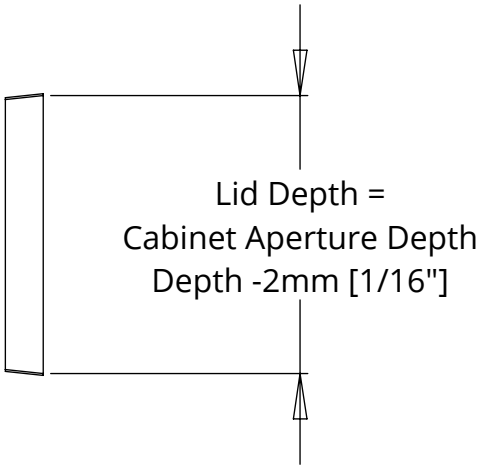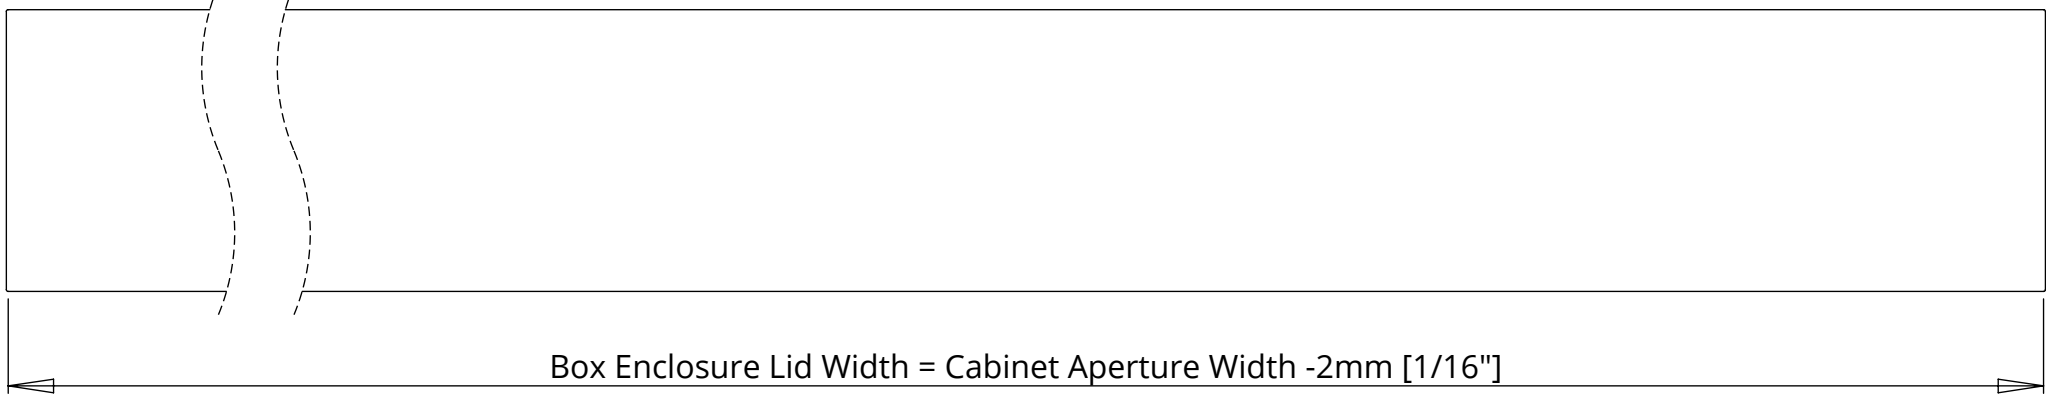

BASE PANEL TOP VIEW

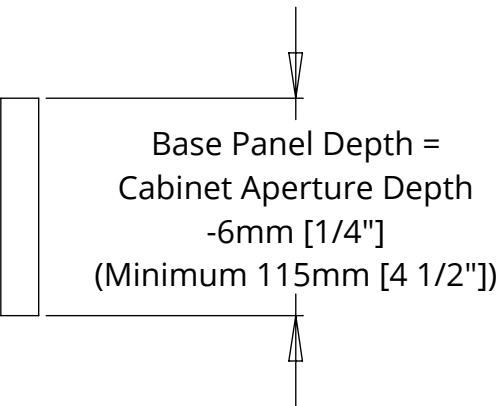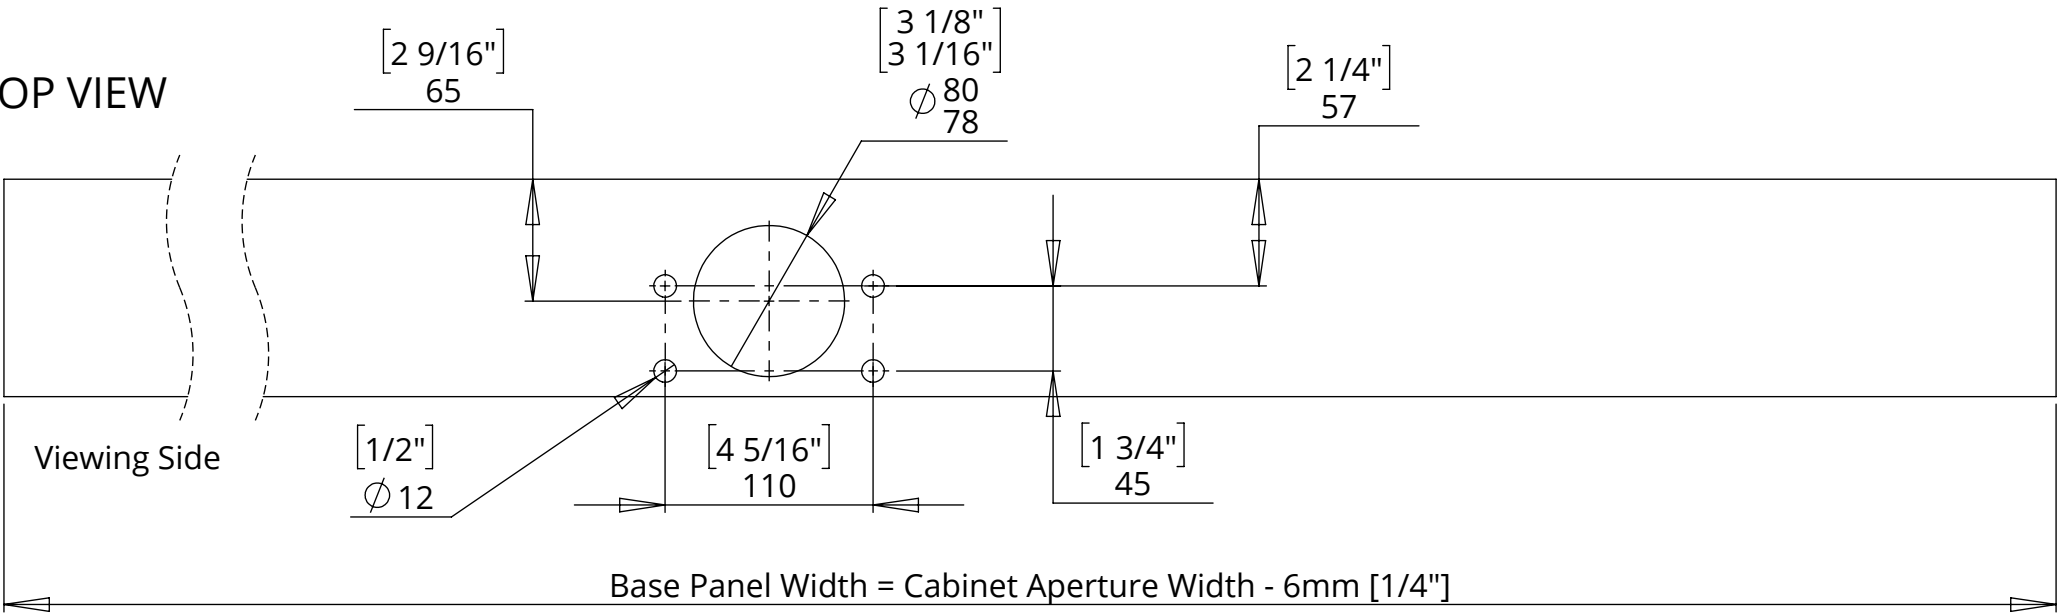

BASE PANEL BOTTOM VIEW

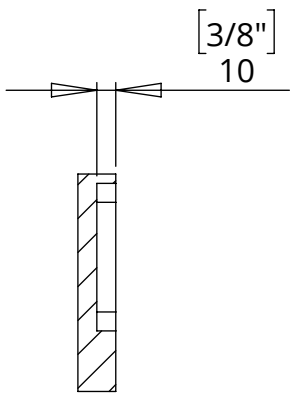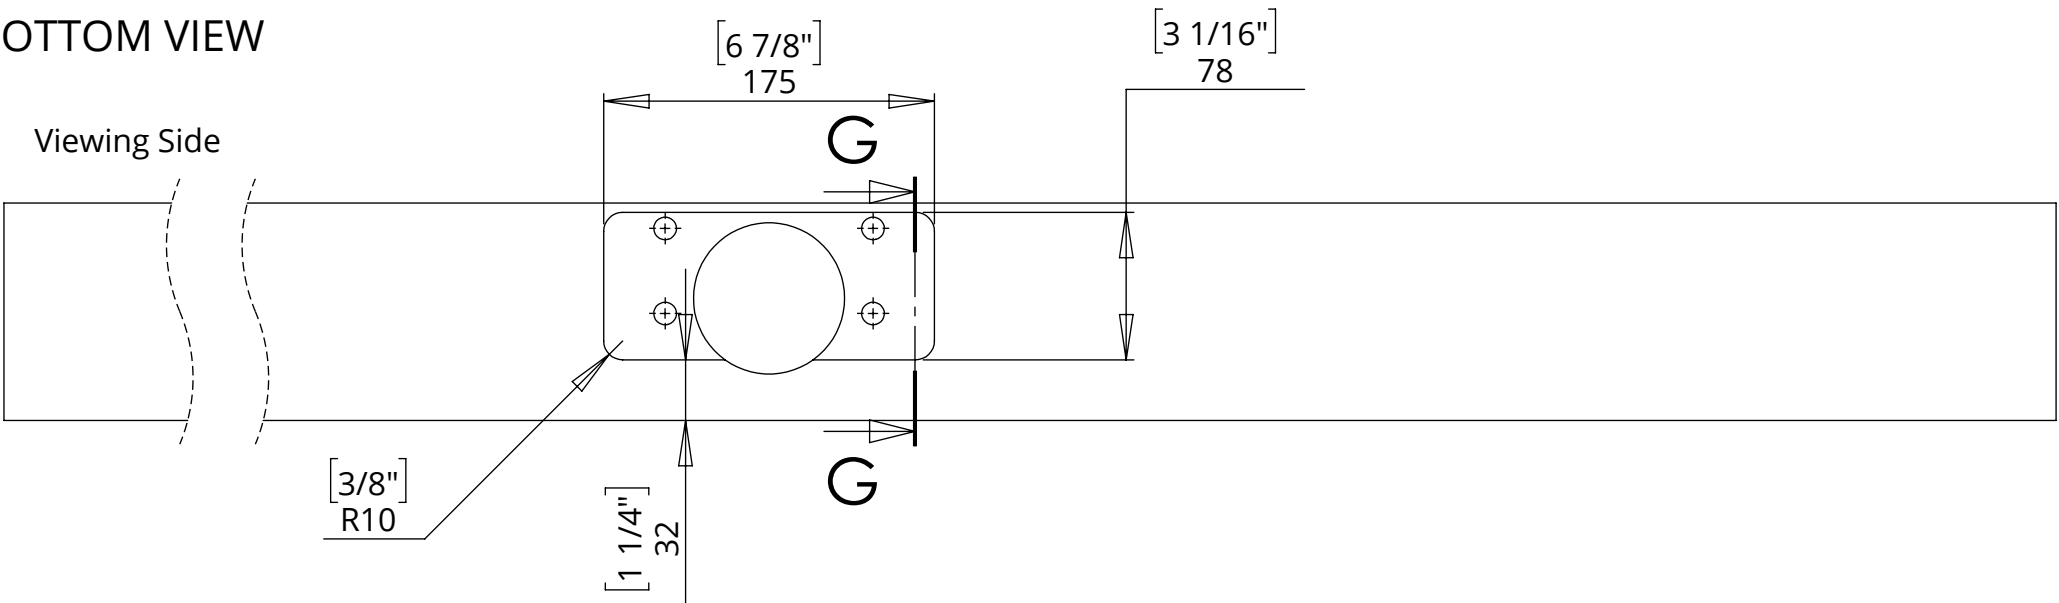

SECTION G-G

LSM-BE/PF 2





LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP



future automation

LSM-PF 2 - MECHANISM UP - IN CABINET




Aperture Depth =
Screen Depth + 83 [3 1/4"]
(Minimum 121 [4 3/4"])

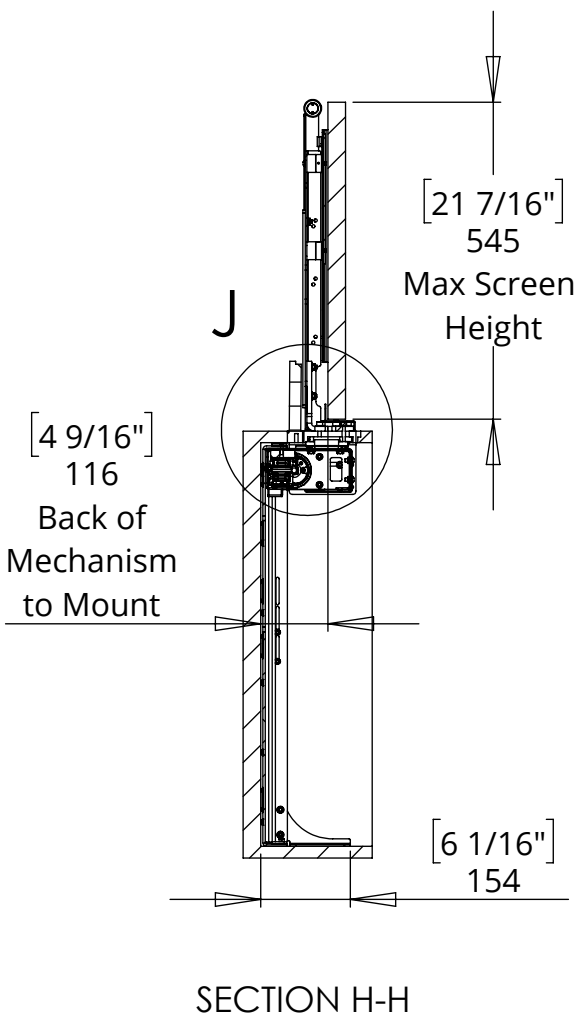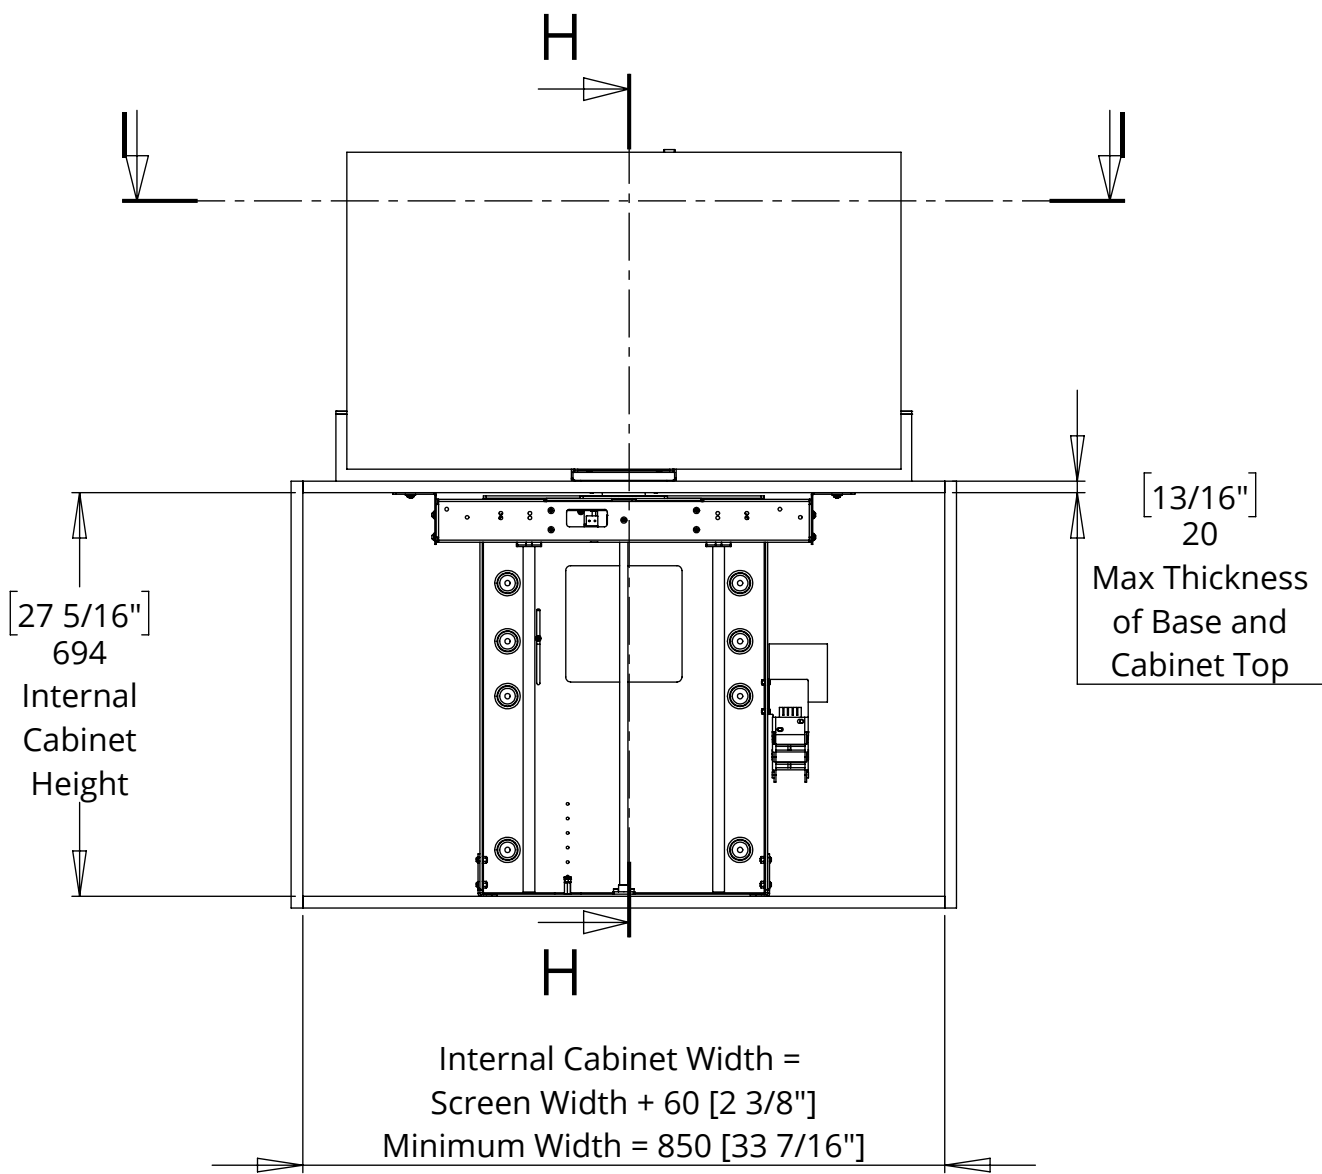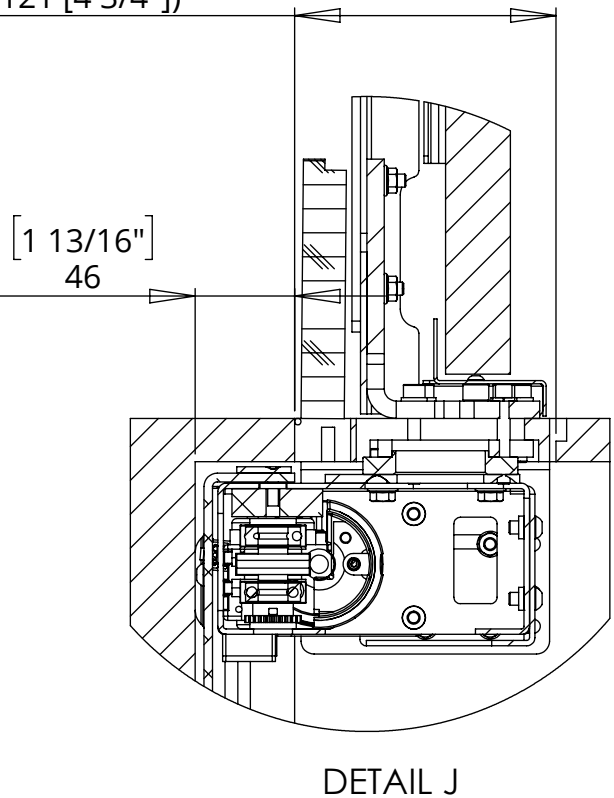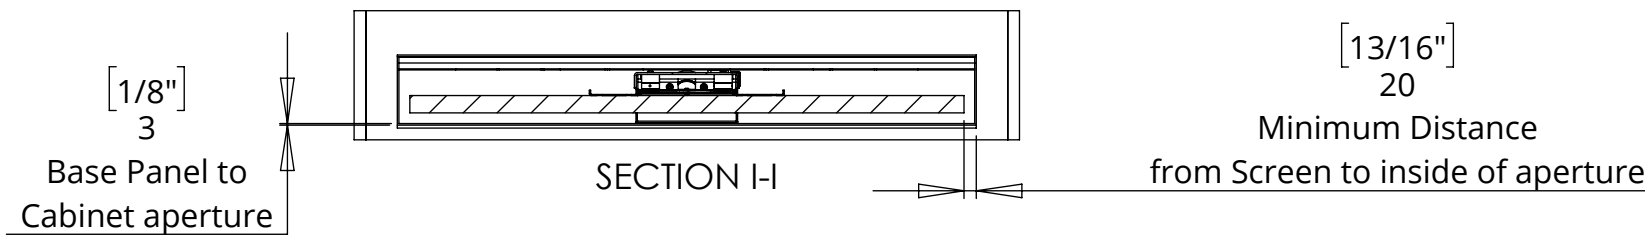

LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP

LSM-PF 2 - MECHANISM DOWN - IN CABINET

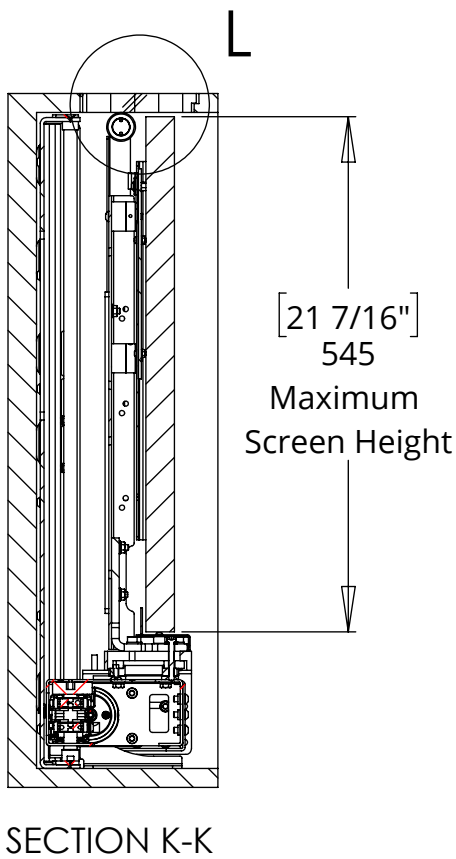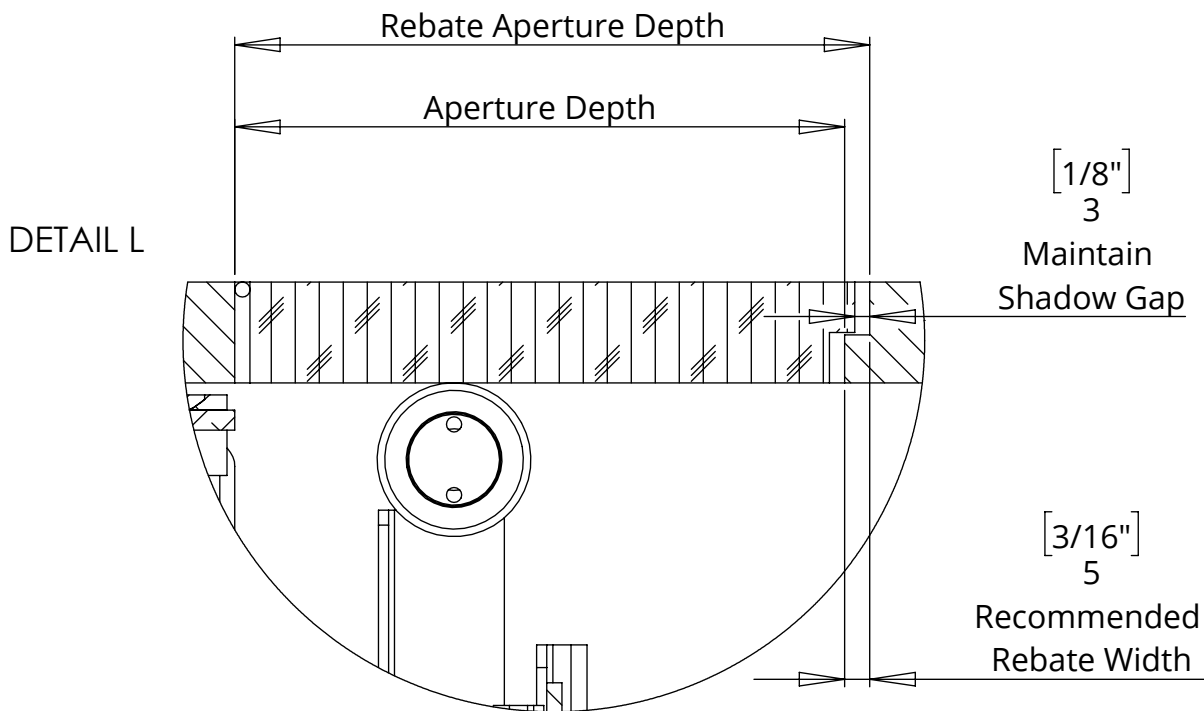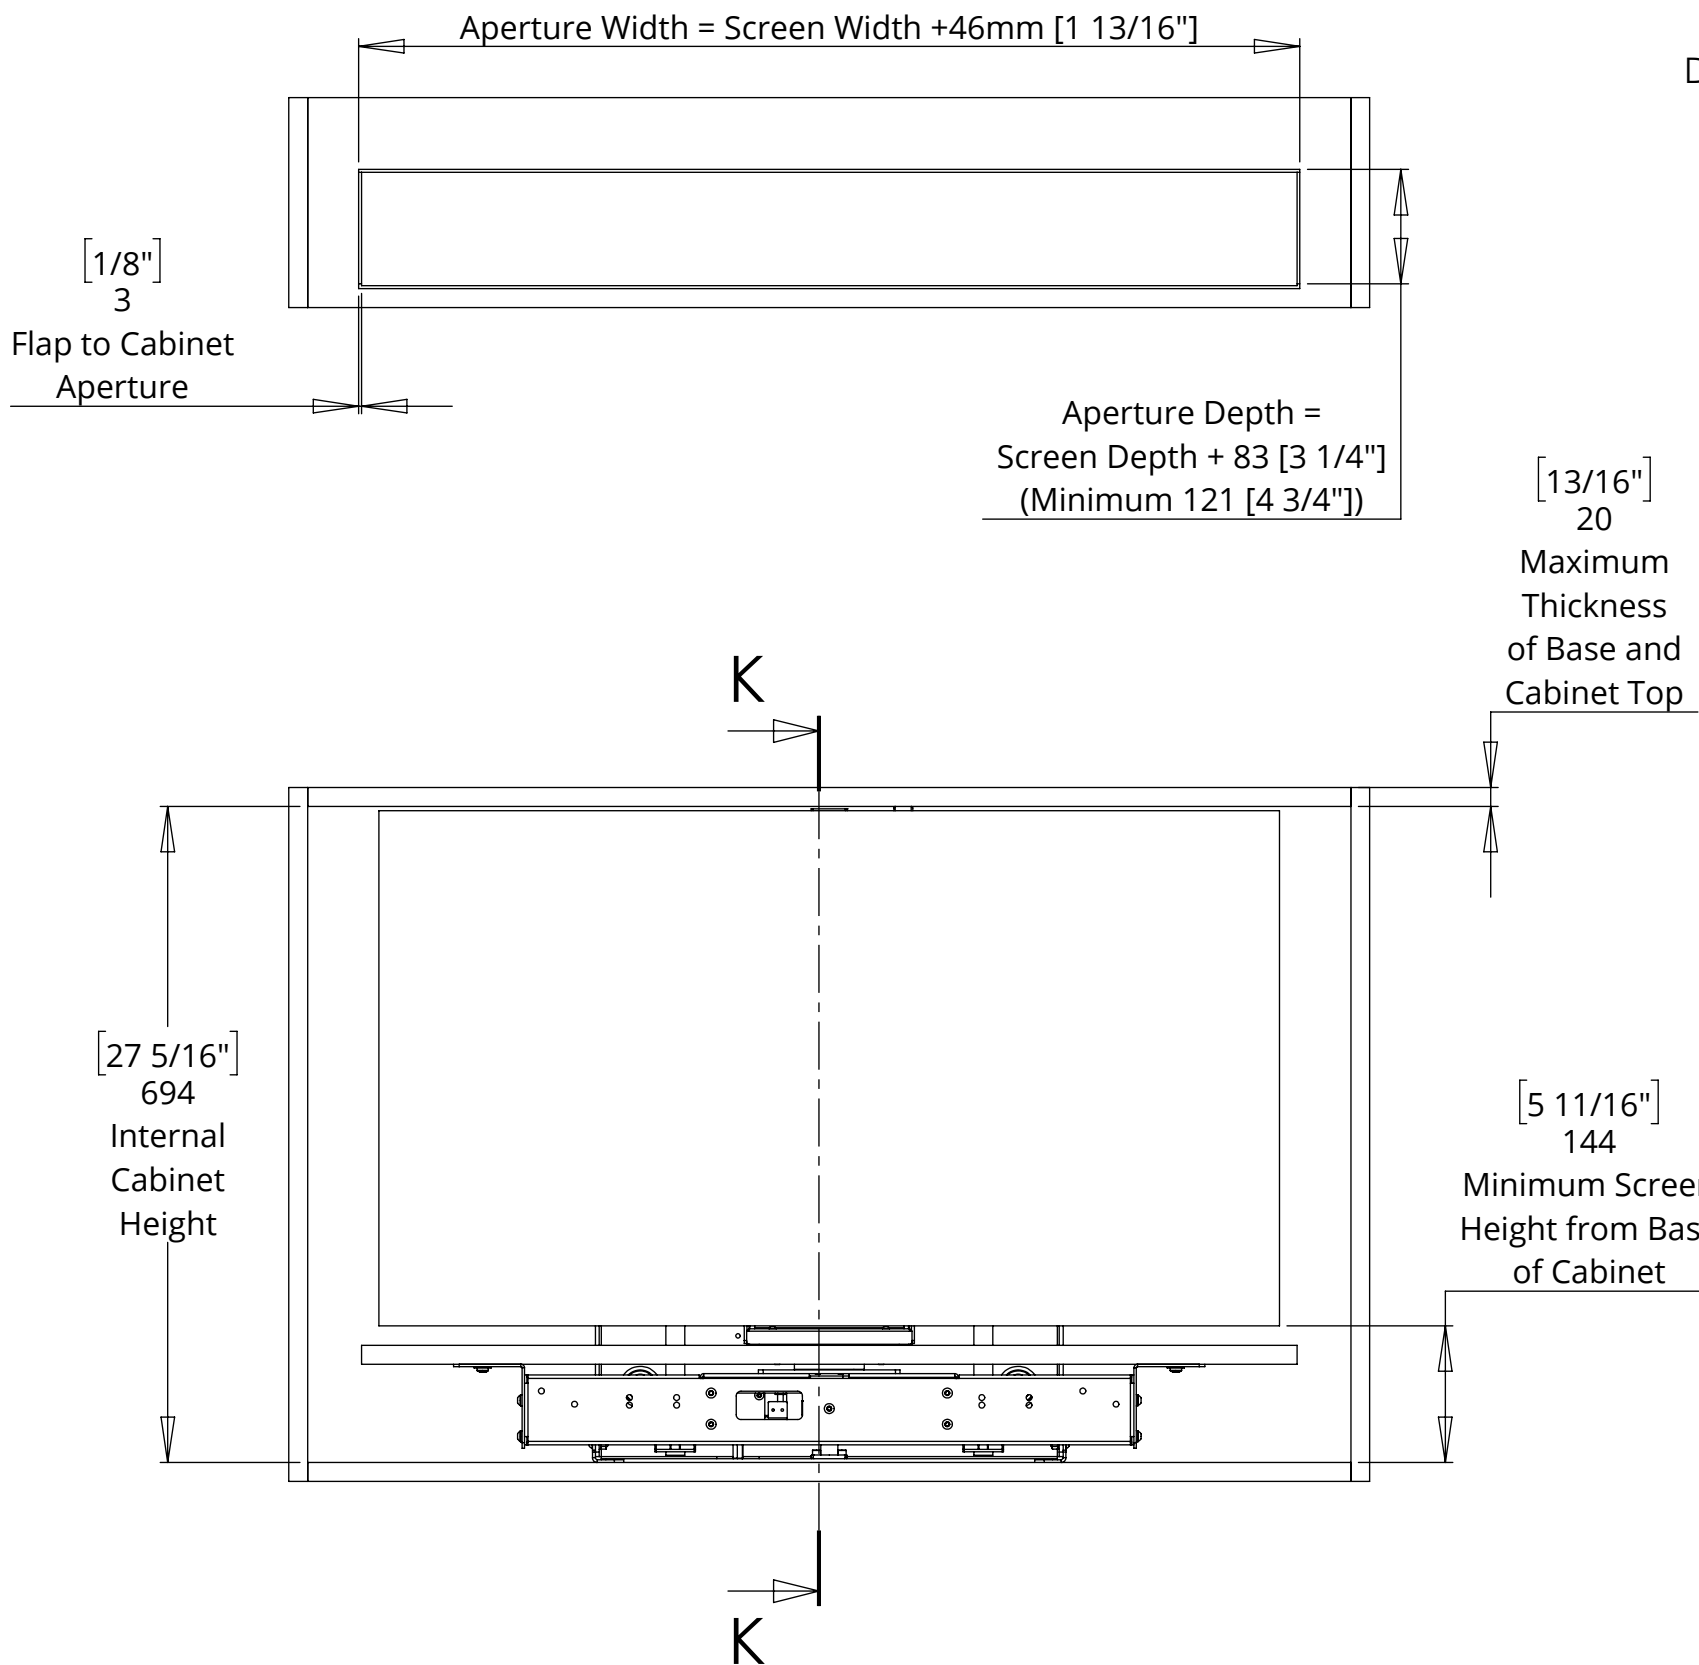

LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP



future automation



PUSH FLAP BASE PANEL AND FLAP DETAILS

Flap depth dimensions are based on a 3mm thick piano hinge.
Required flap dimensions may vary dependant on the hinge used.



A step is required on the front of the flap to meet a step in the front edge of the cabinet aperture

DETAIL M



FLAP PANEL - BOTTOM VIEW

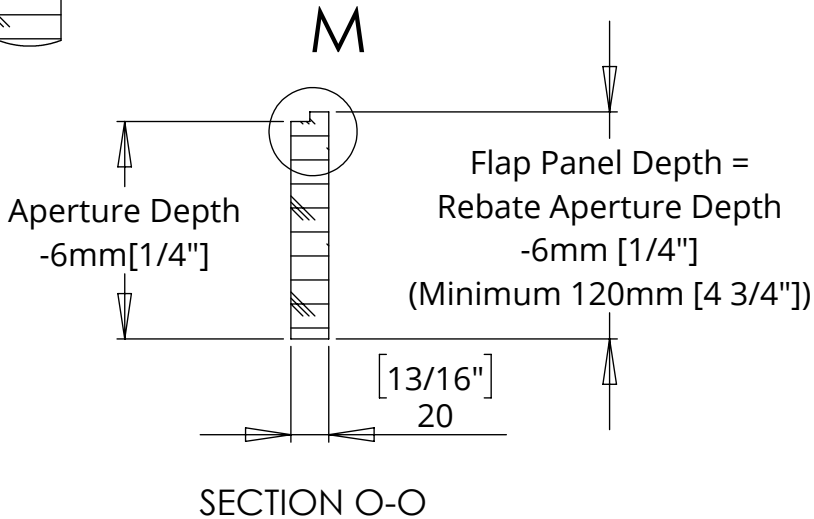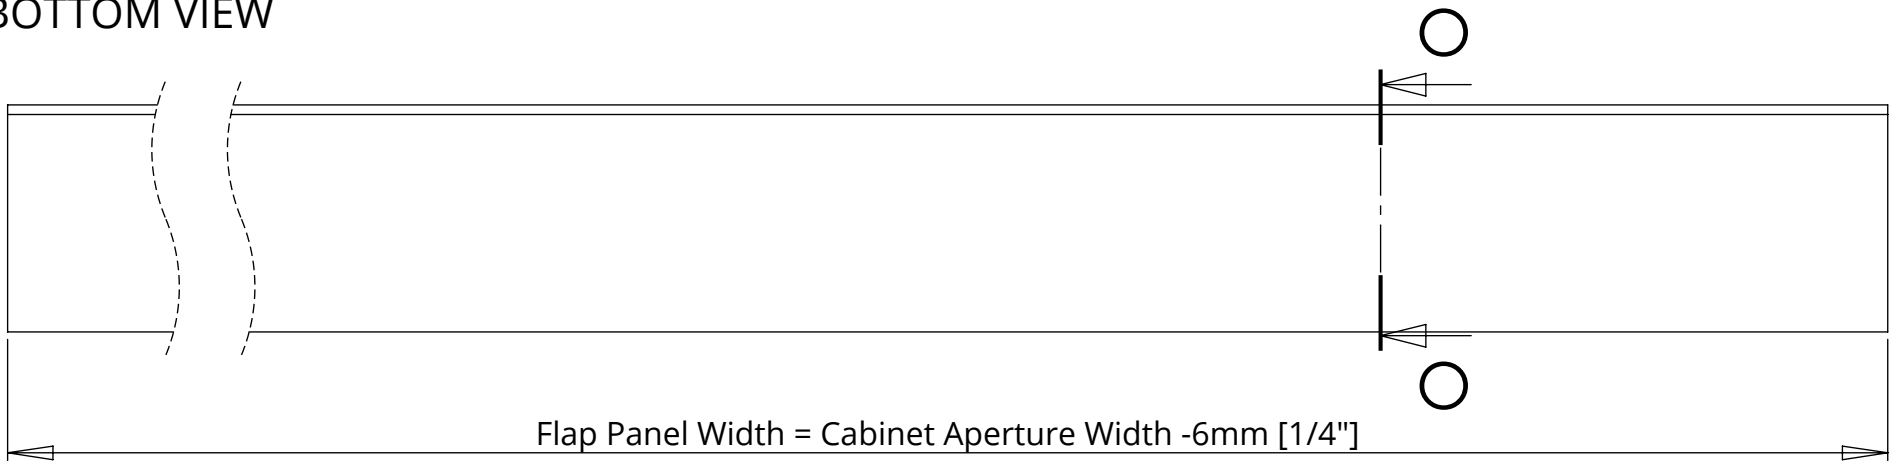

BASE PANEL - TOP VIEW

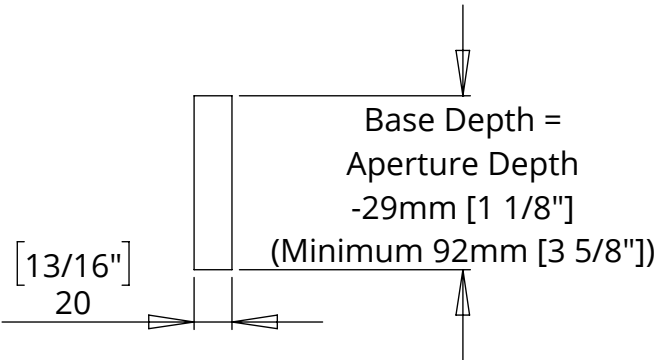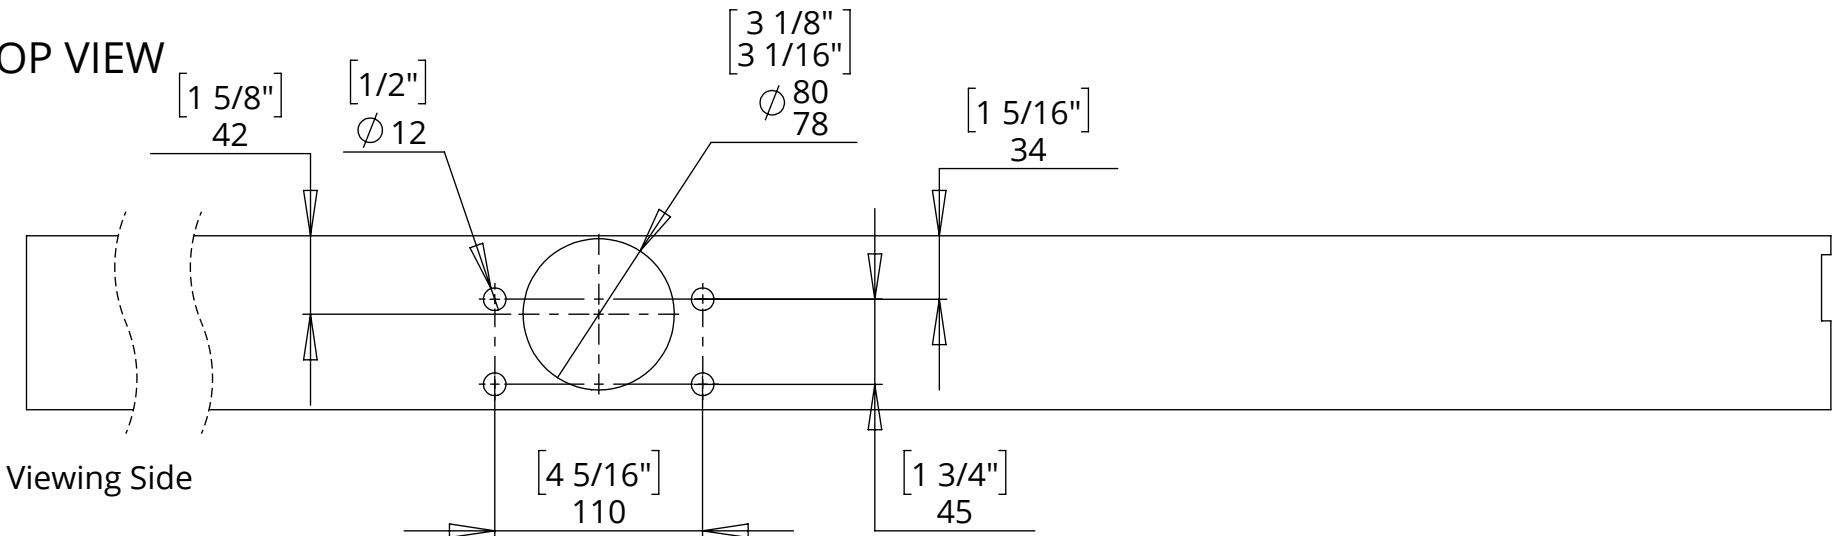

BASE PANEL - BOTTOM VIEW

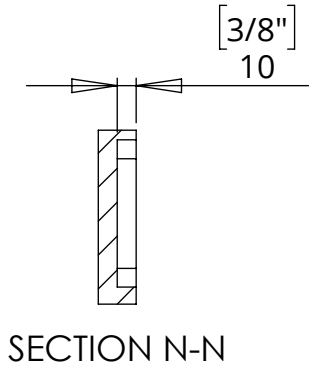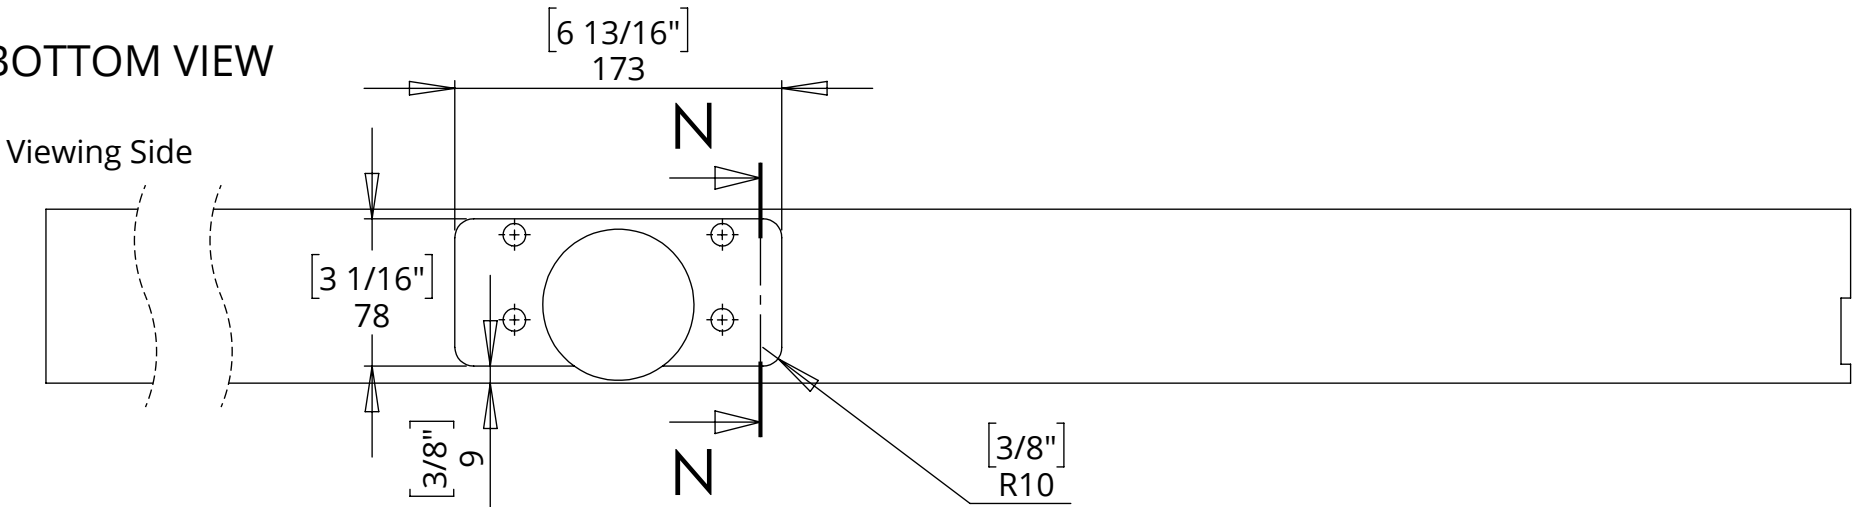


LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP

BOX ENCLOSURE POSITION ADJUSTMENT




future automation

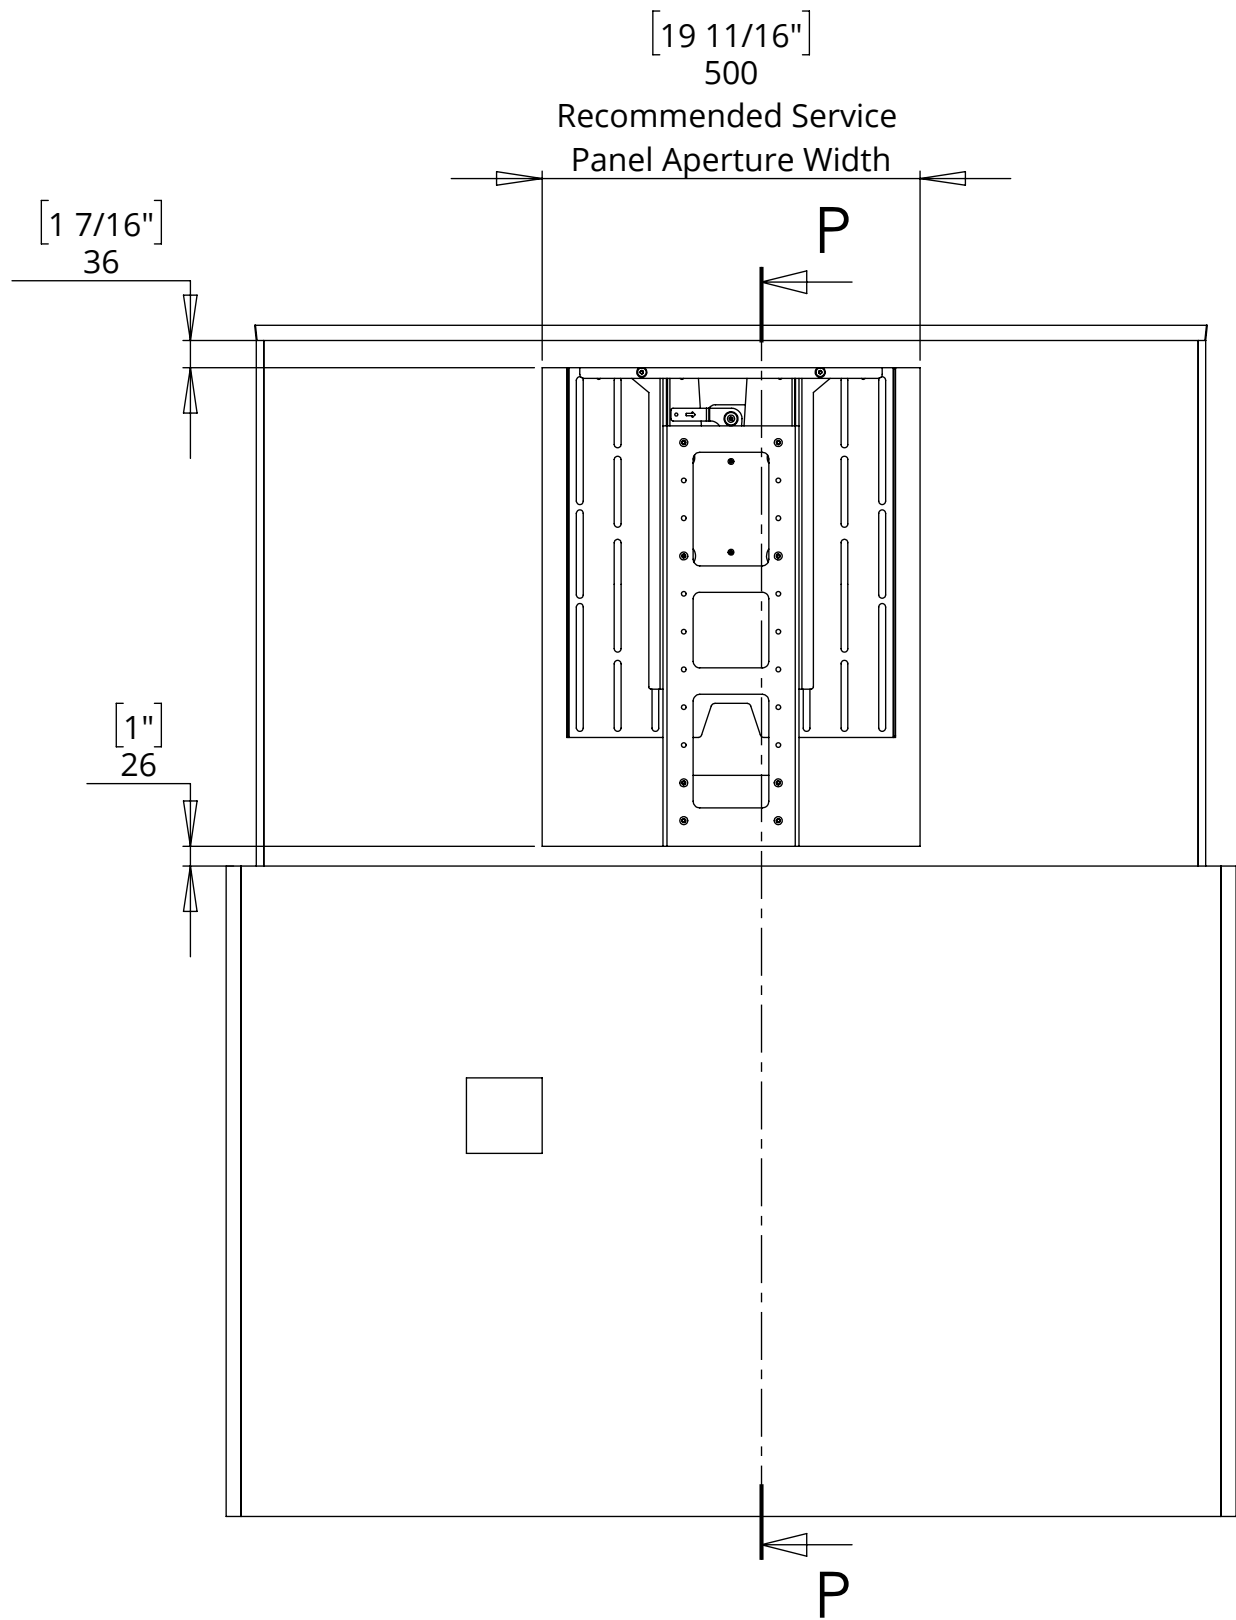


The countersink bolts enable fine tuning the position of the box enclosure relative to the uprights

± 5mm Adjustment




Q

SECTION P-P

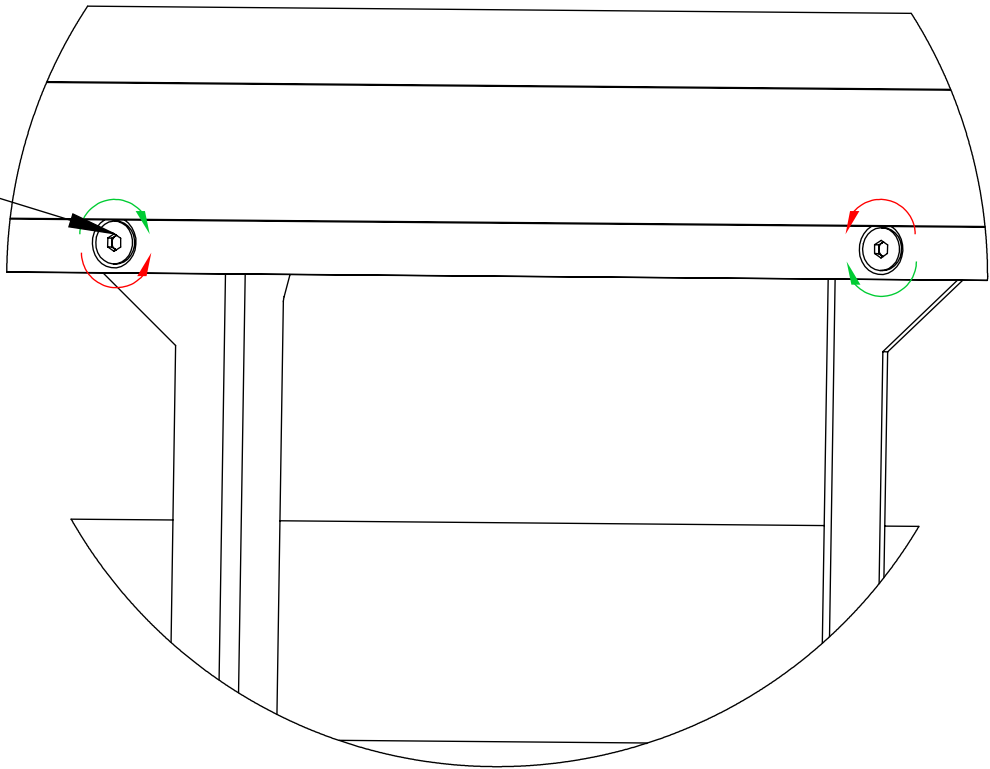

$1 \frac{7}{16}$ "
36
Required distance
between top of aperture
and bottom of lid

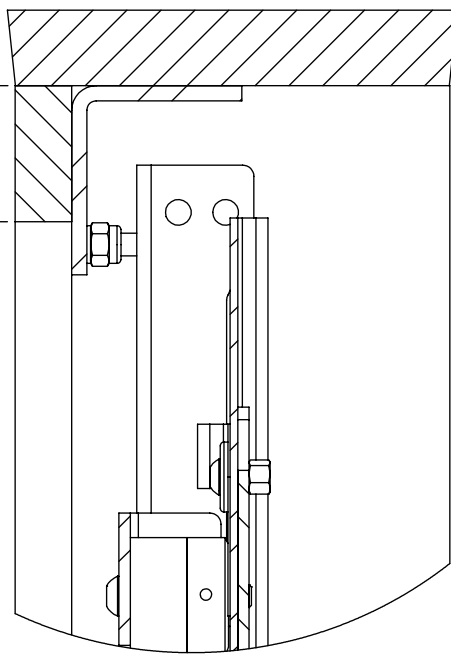

DETAIL Q


LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP

SCREEN MOUNT ADJUSTABILITY

A standard adjustable height VESA 400 mount is included. This is also compatible with VESA 300 and 200 mounting patterns

Separate VESA 300 and 200 mounts are available.

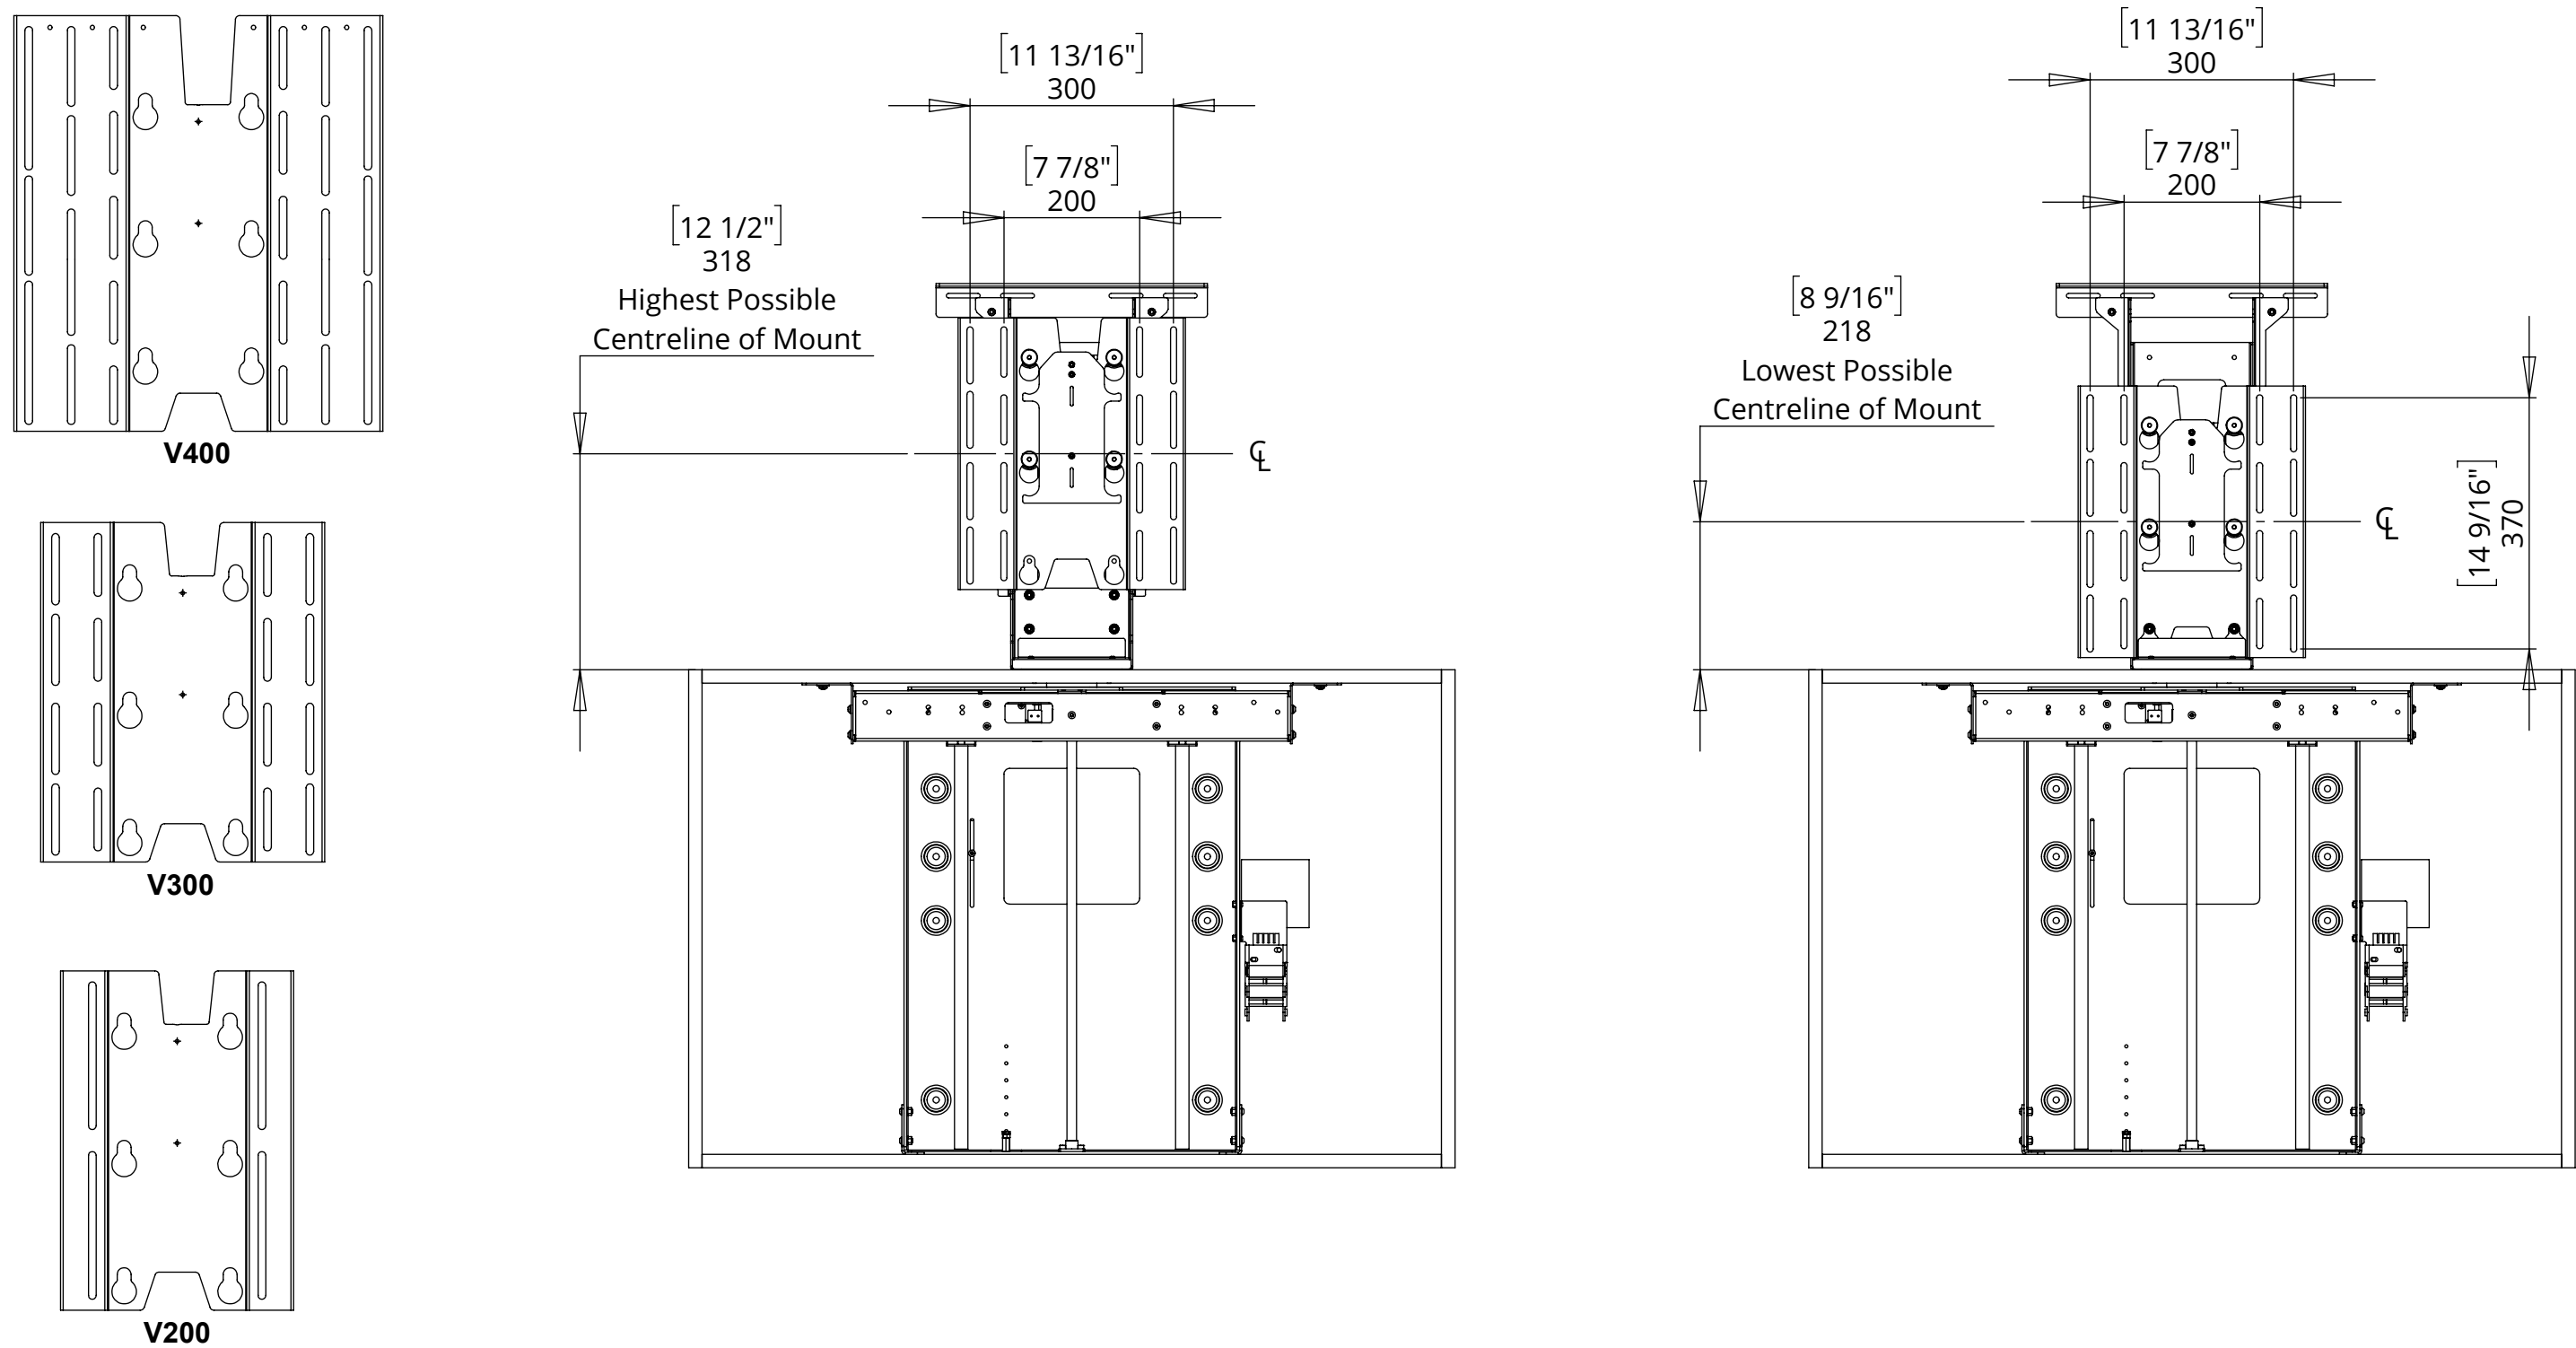


LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP



future automation

MECHANISM INSTALLATION OVERVIEW

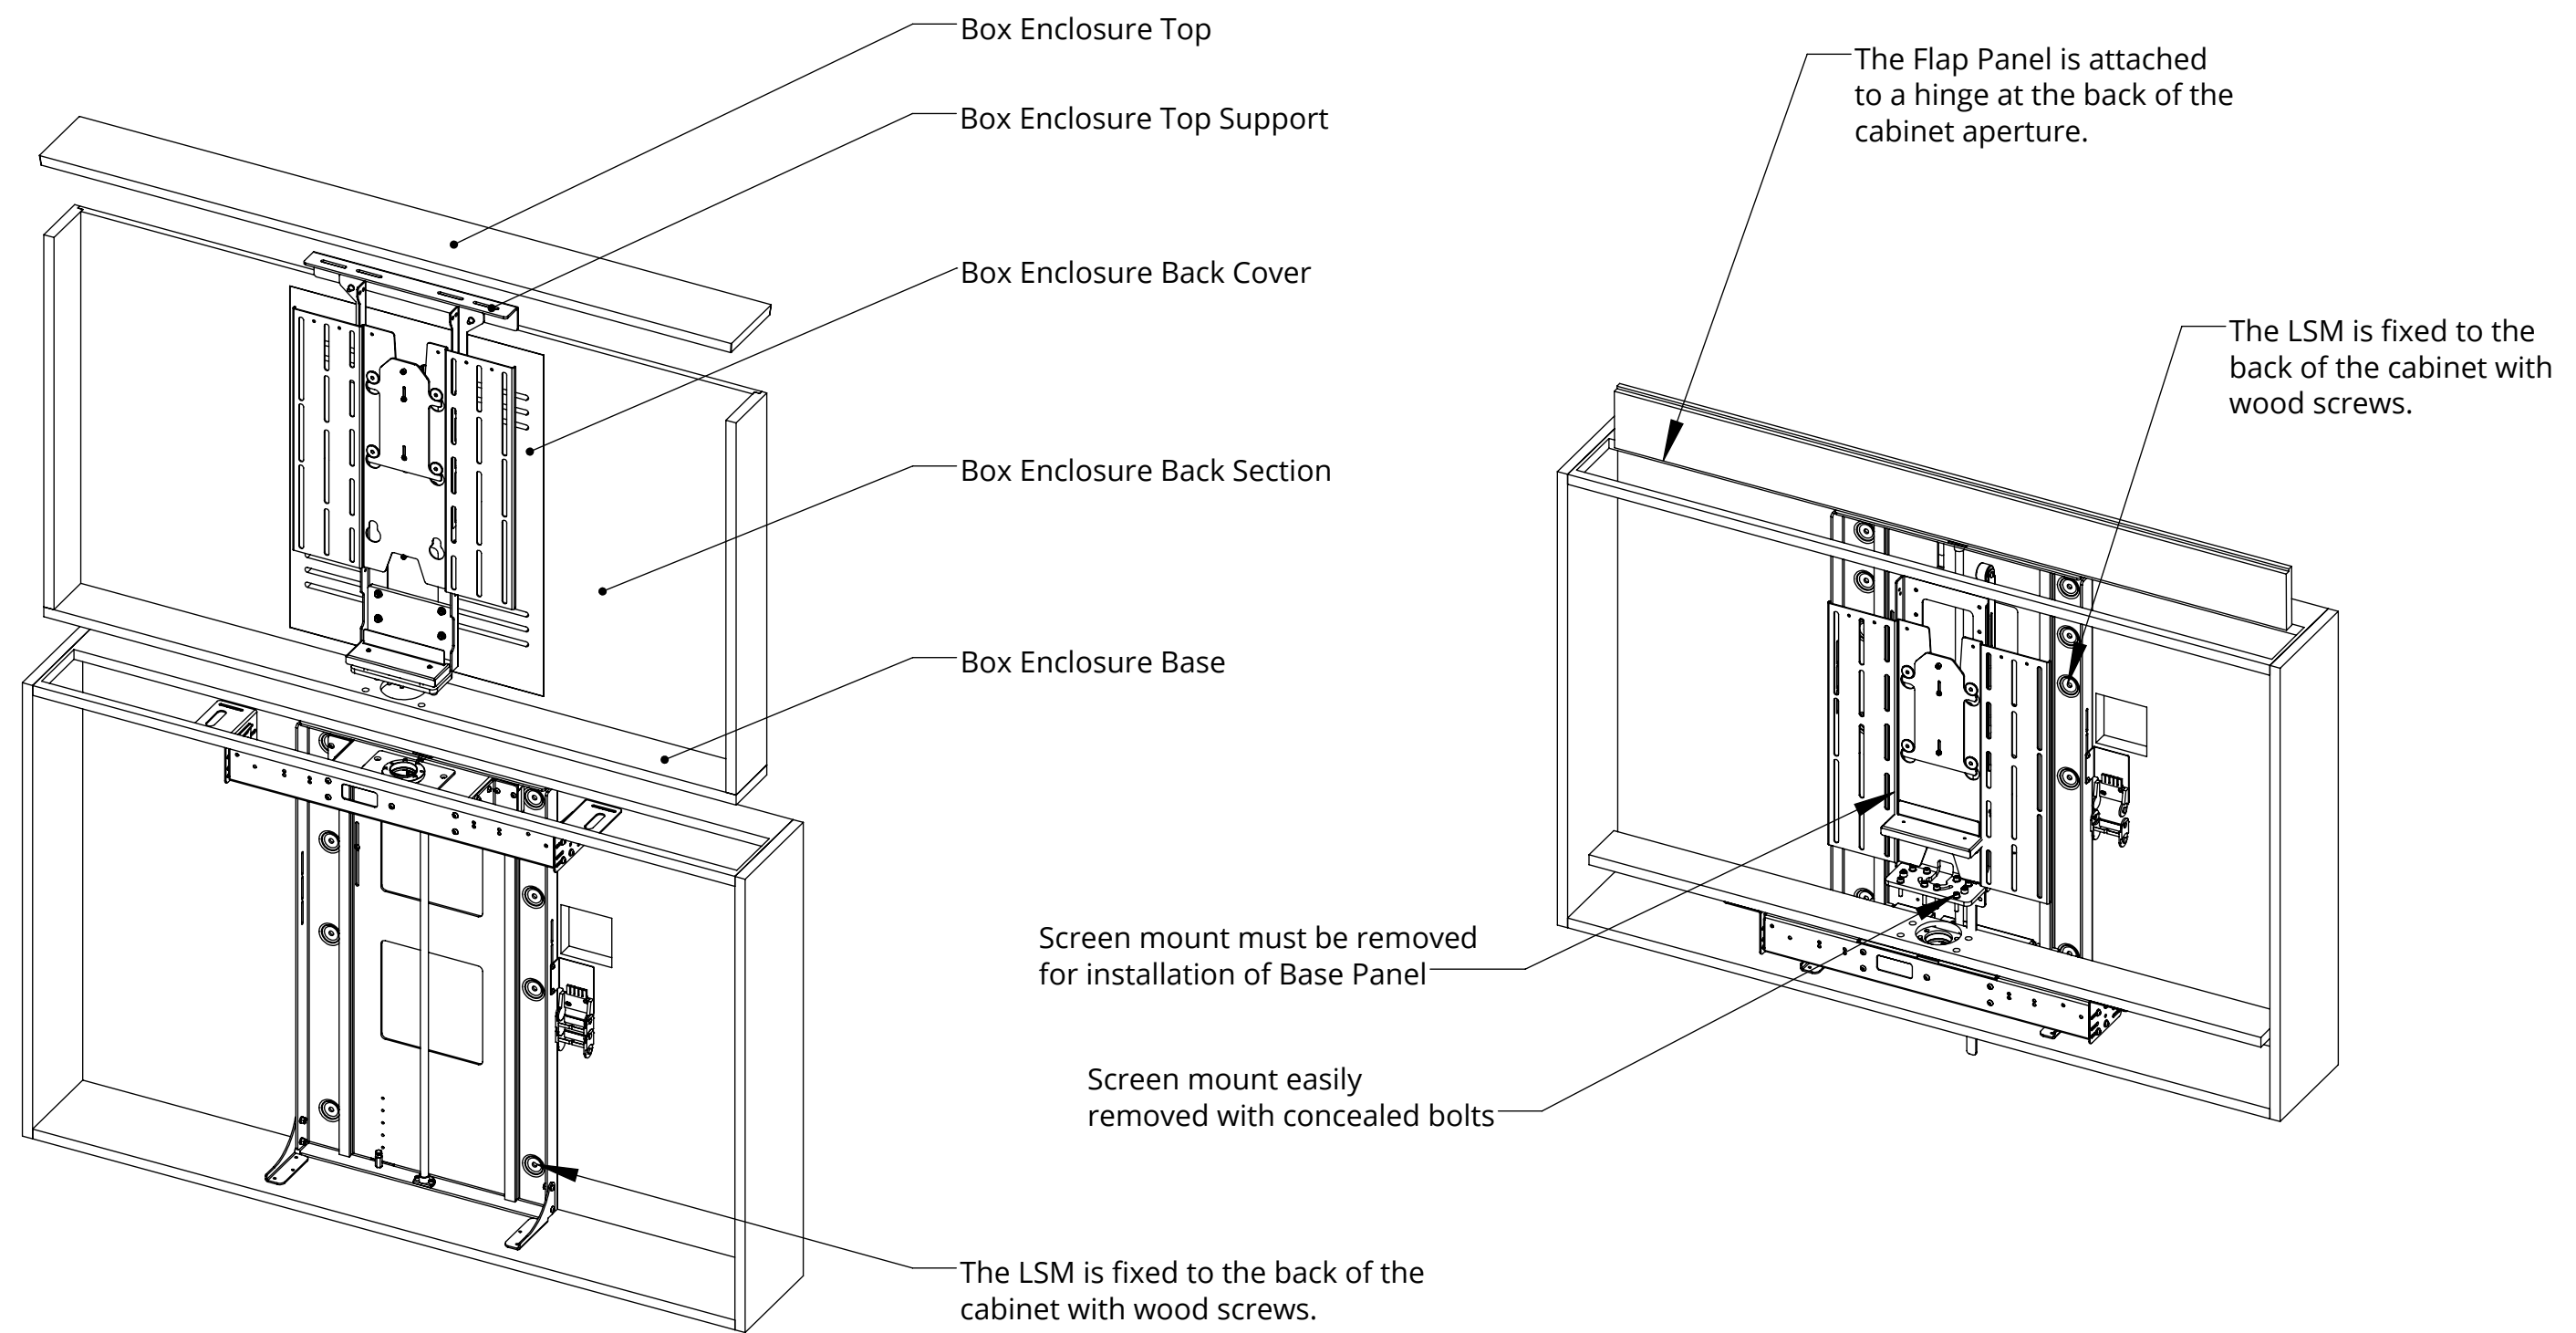

LSM-BE/PF 2


LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP






future automation

OVERALL MECHANISM DIMENSIONS

MECHANISM - UP POSITION

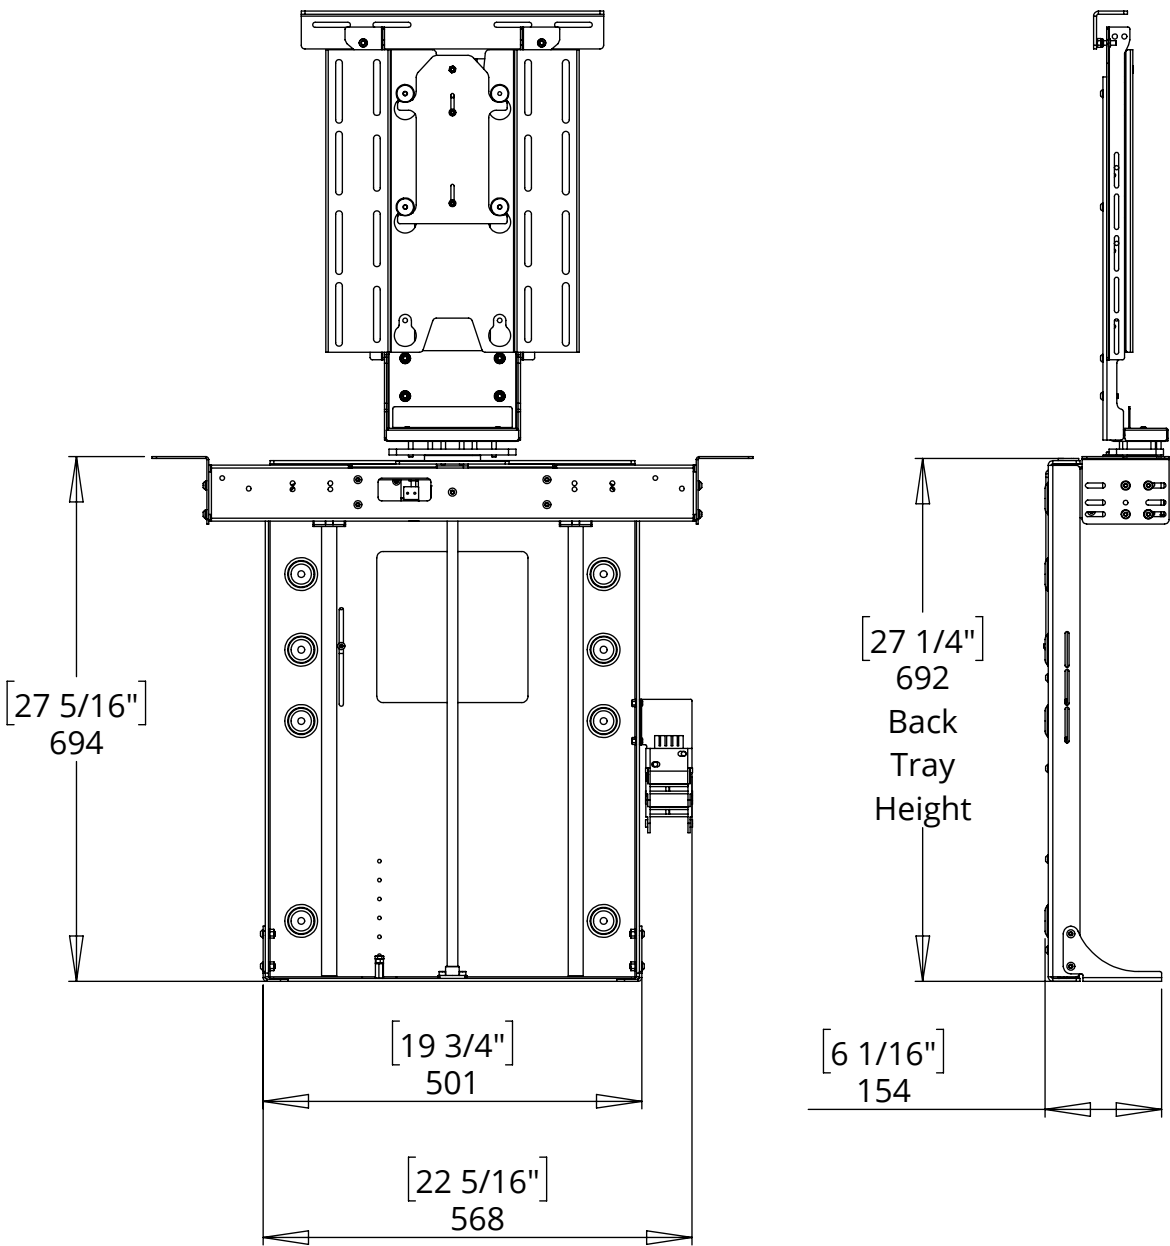



MECHANISM - DOWN POSITION

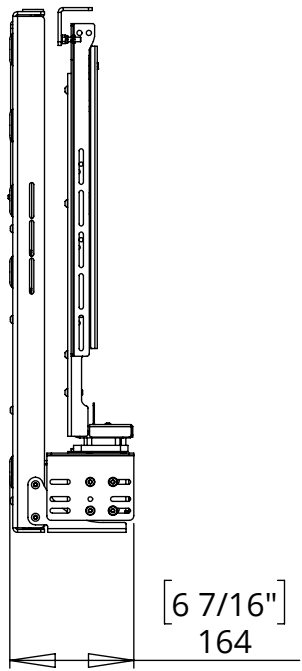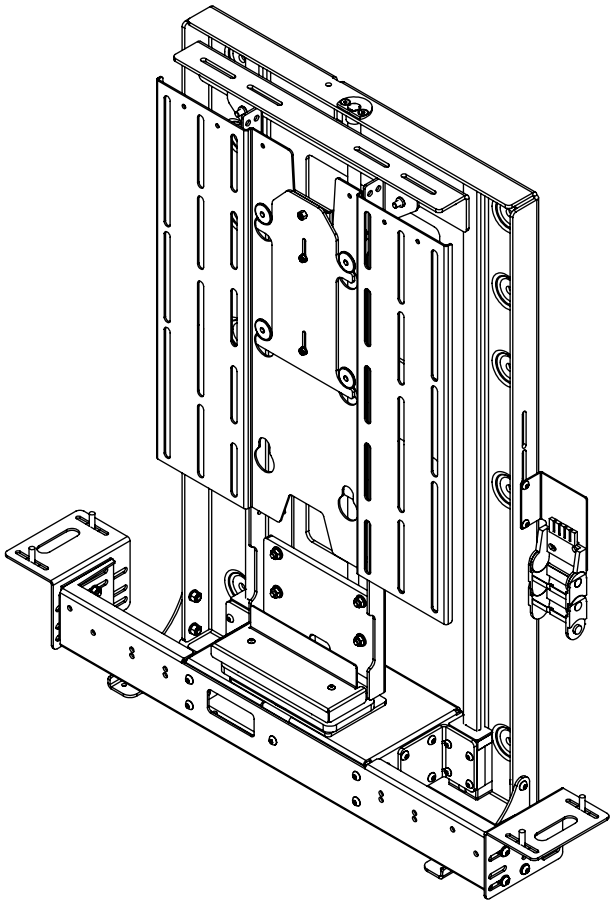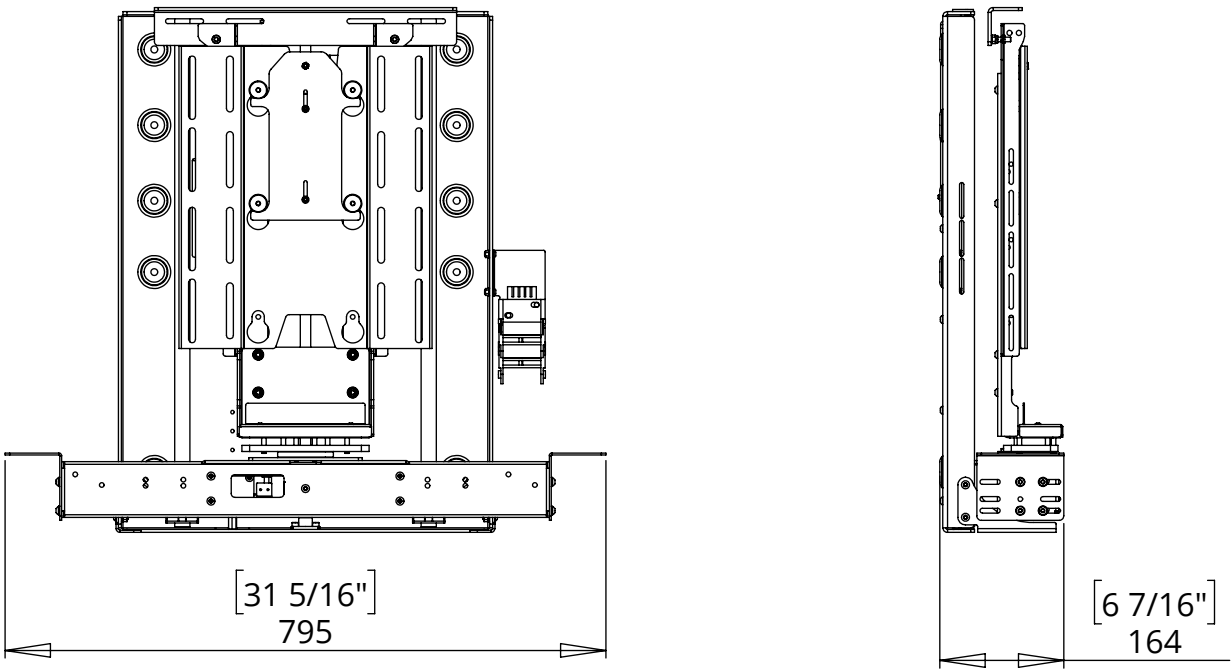

LSM-BE/PF 2

LIFT SYSTEM FOR BOX ENCLOSURE/ PUSH FLAP

CONTROL BOX DIMENSIONS

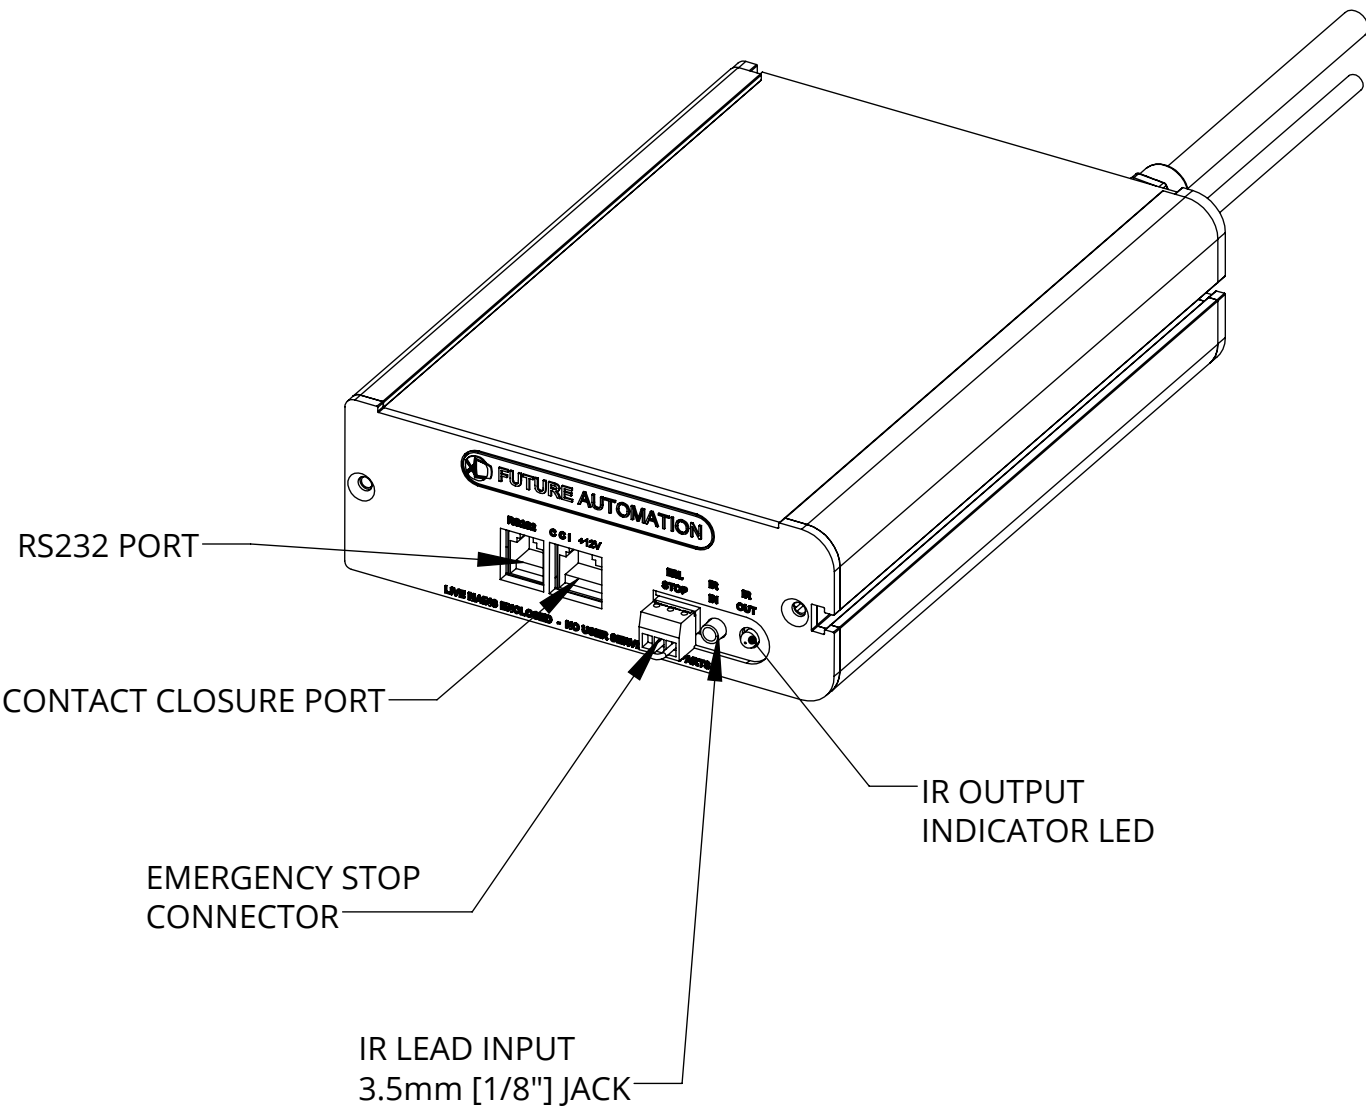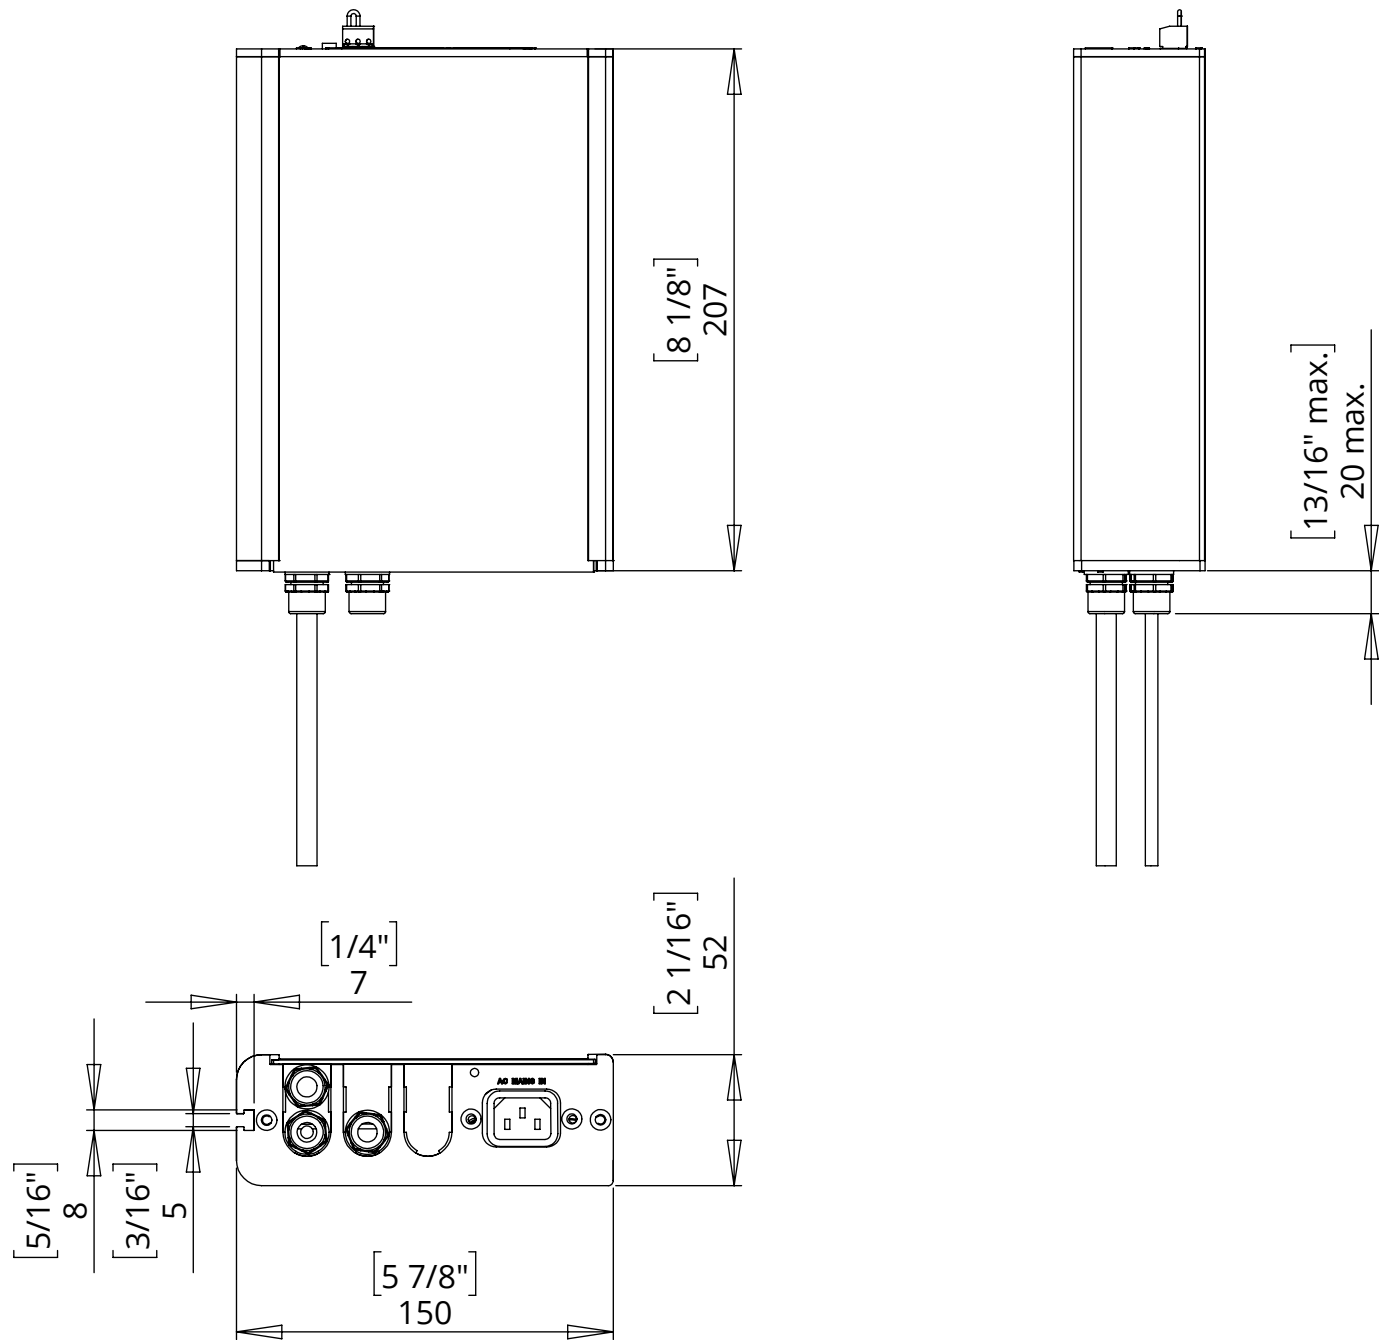

NOTES

- CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]
- CONTROL BOX **MUST** BE LOCATED IN ACCESSIBLE LOCATION