
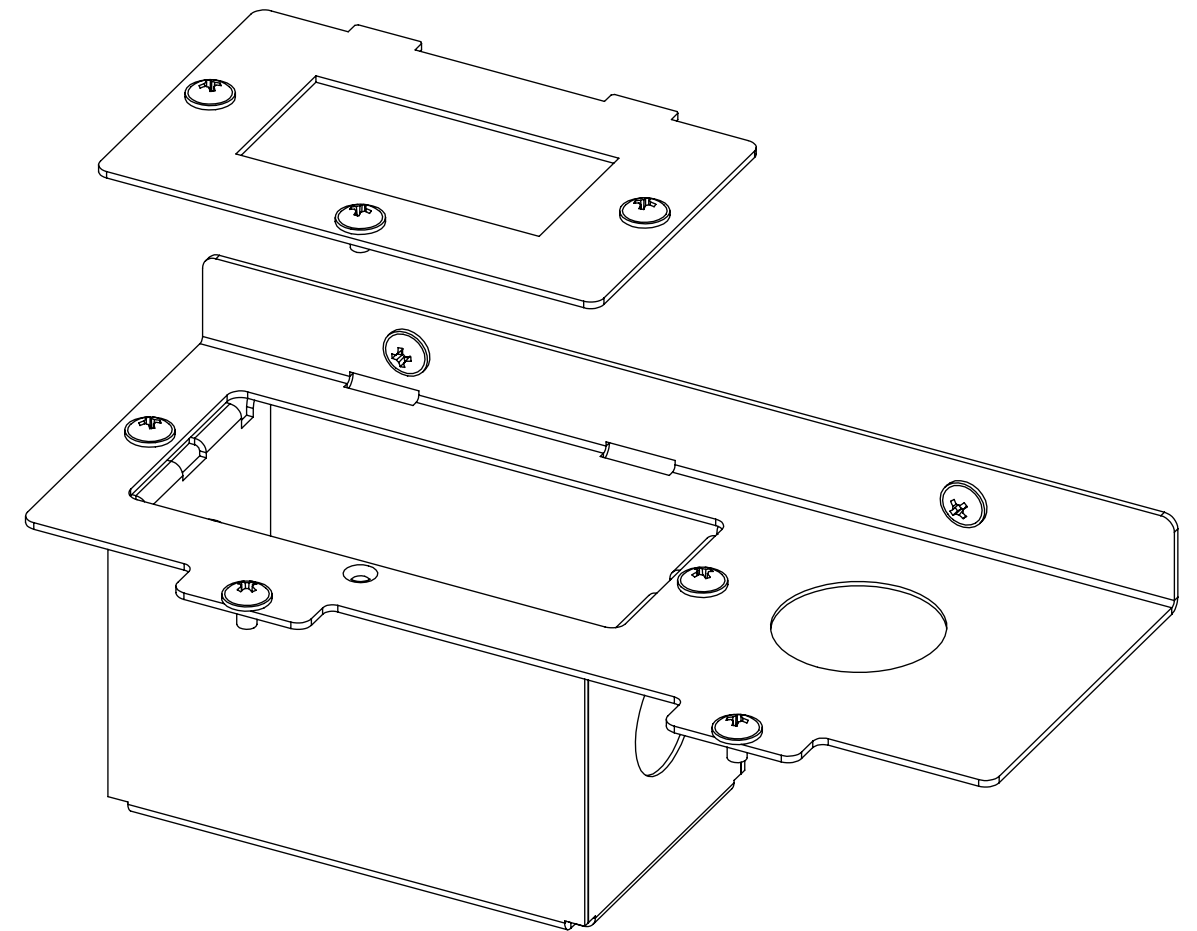


WB-PO

POWER OUTLET FOR WB RANGE

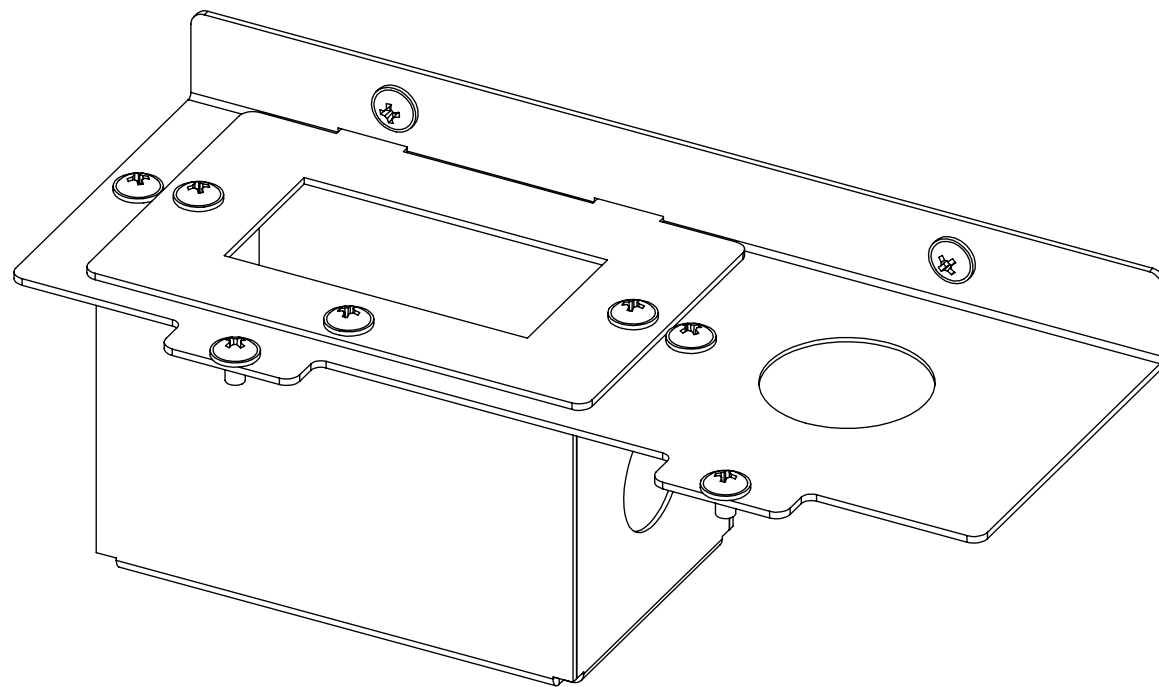

WB-PO

POWER OUTLET FOR WB RANGE



future automation

SPECIFICATION	MEASUREMENTS
Product Dimensions	218mm (8 9/16") x 90mm (3 9/16") x 87mm (3 7/16")
Outlet Voltage	250V AC
Outlet Amperage	13A
NEMA	5-15R
Poles	2
Wires	3
Outlet Temperature Rise	Max 30C after 100 cycles OL at 150 percent rated current
Outlet Operating Temperature	-40°C to 60°C
Outlet Flammability	Rated V-2 per UL 94
Outlet Terminal Accom.	2.5mm
Outlet Material Face / Body	Thermoplastic Nylon
Outlet Face Colour	White

WB-PO


POWER OUTLET FOR WB RANGE




future automation

PLUG OUTLET VARIANTS


In the case of using a plug outlet, the keystone must be removed from the Holding Plate to free up the space for the plug outlet.

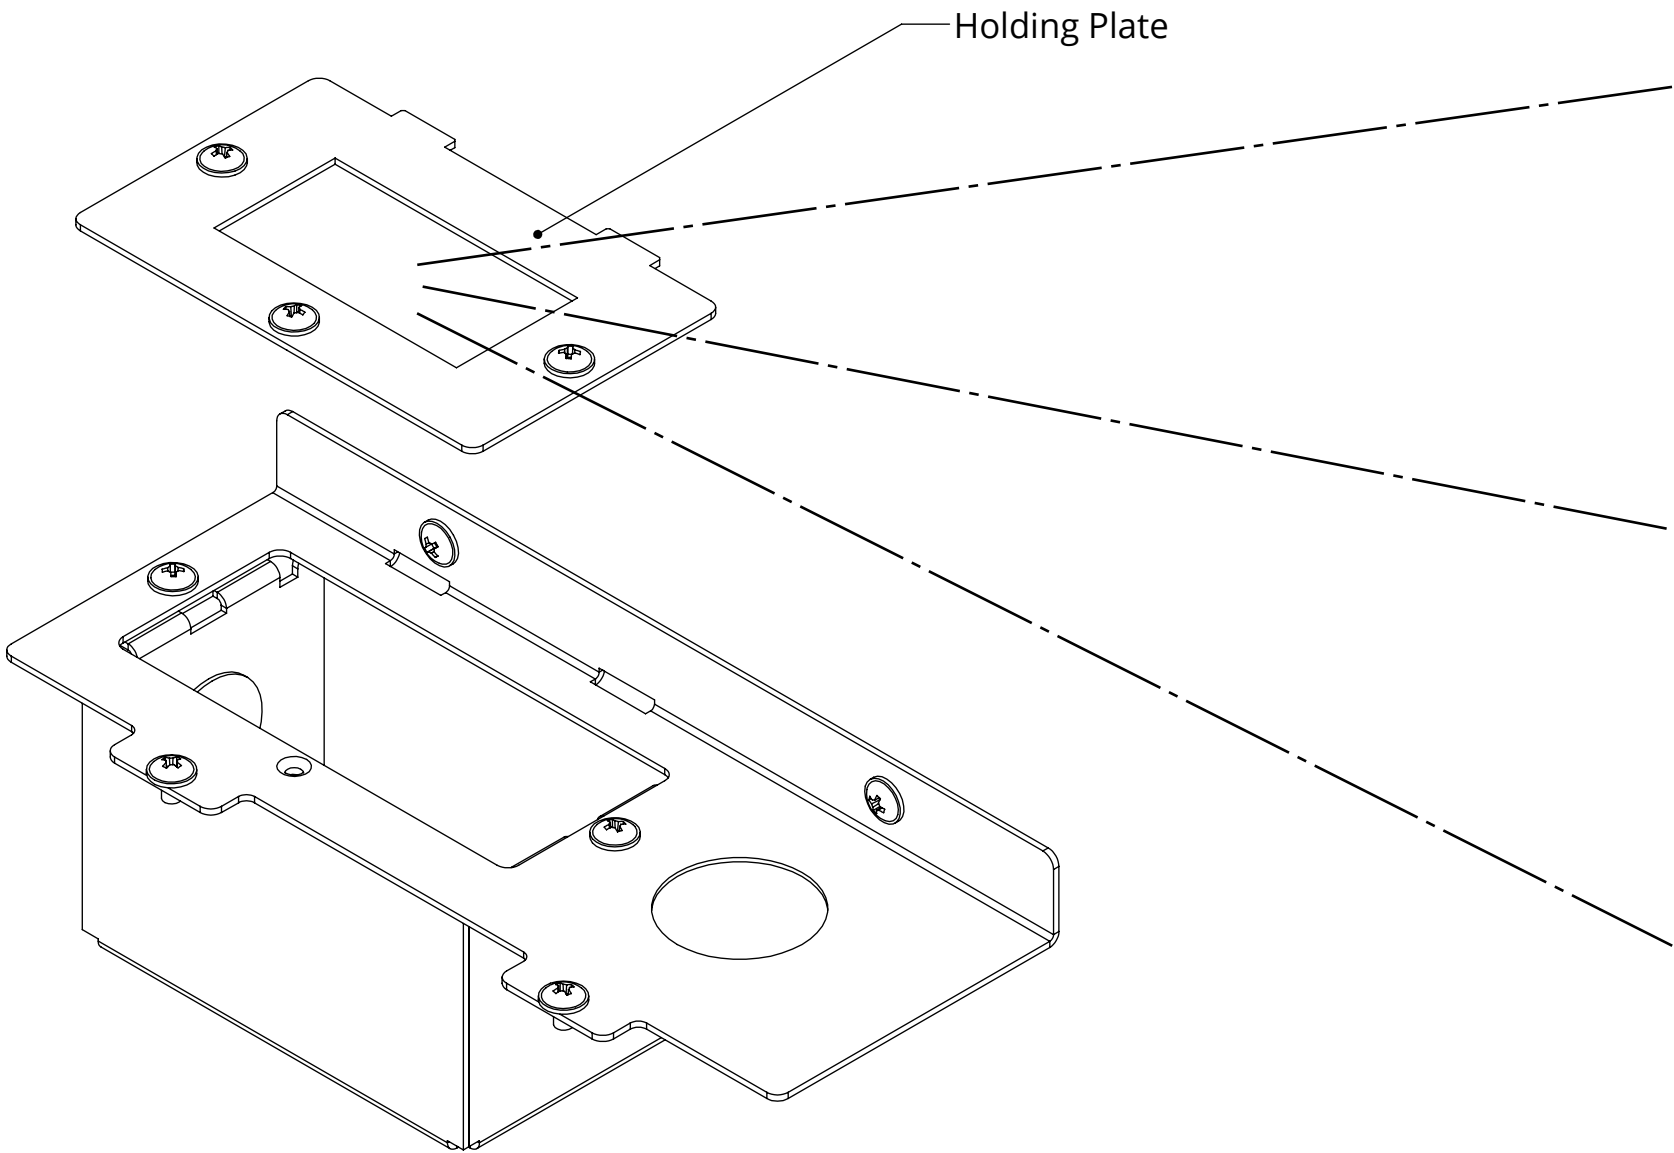


ORDER SEPARATE:

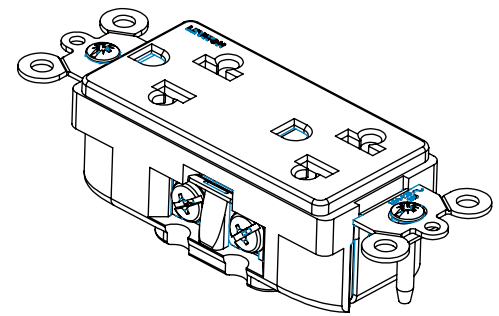

MPO-EU:
Euro Plug Outlet

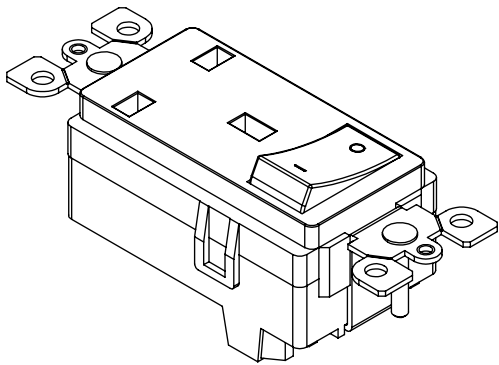

MPO-UK:
UK Plug Outlet

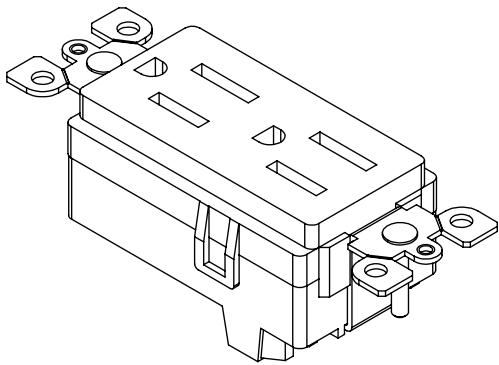

MPO-US:
US Plug Outlet


WB-PO

POWER OUTLET FOR WB RANGE


MOUNTING THE POWER OUTLET

Depending on the size of the WB Wall Box and PS bracket is being fitted inside, it may be necessary to remove the cross rails and other internal parts in order to fit the power outlet assembly.



STAGE 1

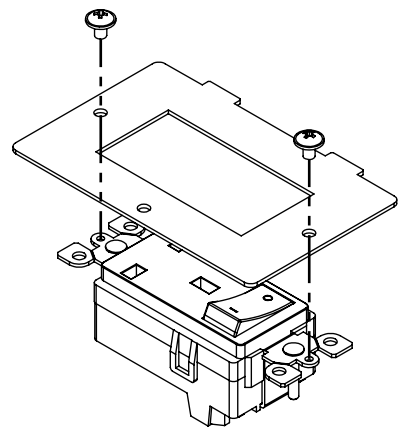

STAGE 2

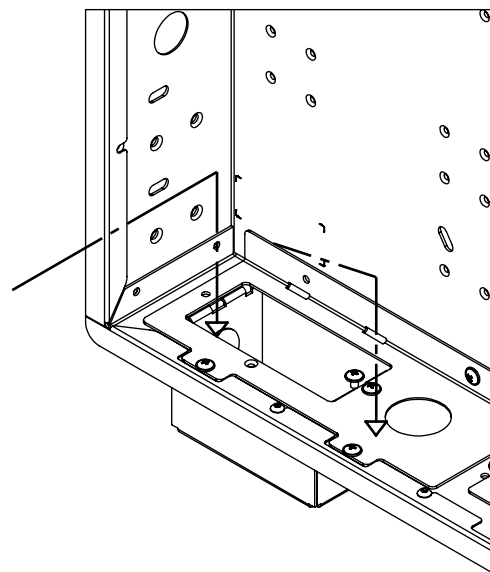

STAGE 3

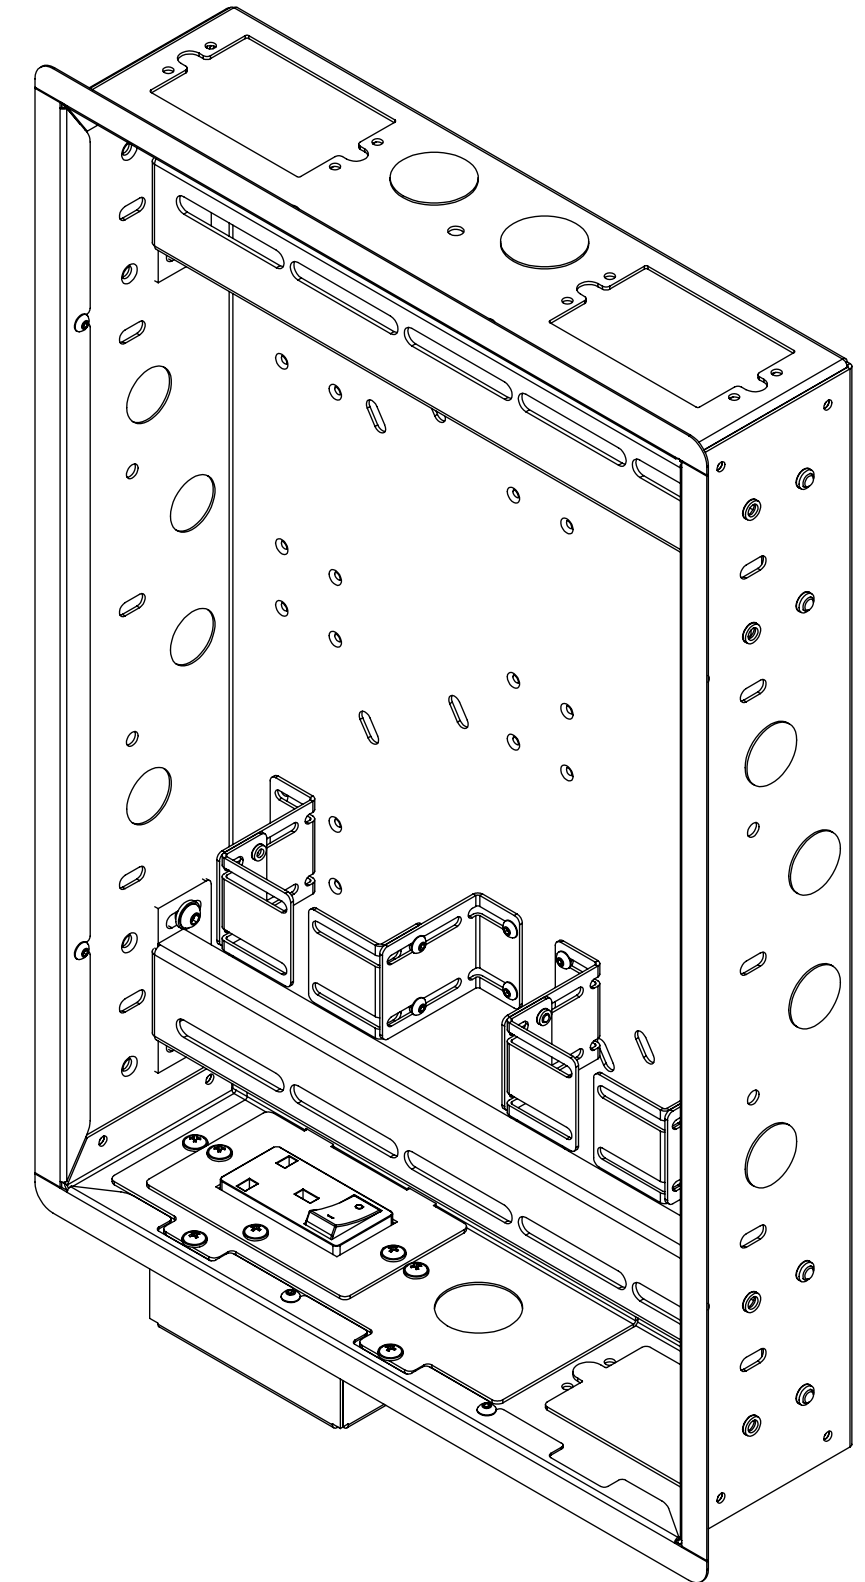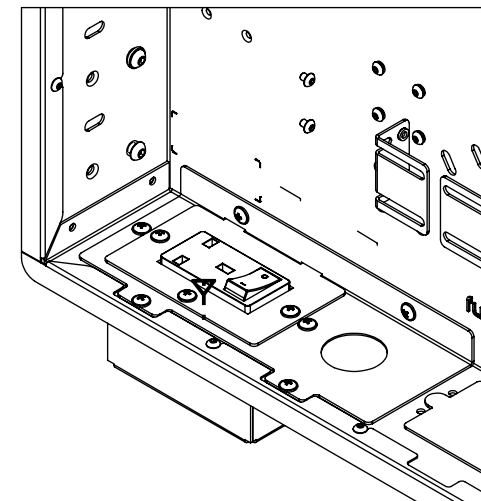

WB-PO

POWER OUTLET FOR WB RANGE

DIMENSIONS

Dimensions shown in mm [inch].

