

# Asec Key Safe Instructions



## Attention:

Please read instructions carefully before you install or operate this product or try to set a new combination.

- The installation and fixing location must be determined by and must be carried out by a qualified, experienced fitter.
- The fixings supplied are suitable for many applications, if the fixings are determined by the fitter to be unsuitable for the application, the fitter should source and use suitable fixings.
- The manufacturer or distributor cannot accept any liability for failure or malfunction due to poor installation or the setting of the combination being carried out incorrectly.
- The manufacturer or distributor cannot accept any liability for any damage or for loss from property due to the installation or use of this product.
- The product is used entirely at the owner's own risk.

**All Key Safes leave the factory with no preset code. The installer or user will need to set the code before use. Once set, DO NOT LOSE THE CODE.**

## First opening:

1. Slide the black button marked 'CLEAR' down.
2. Slide the silver button marked 'OPEN' down.
3. Now you can open the cover and set your own code.
4. You will find the fixings and a small flat code setting key inside your Key Safe.

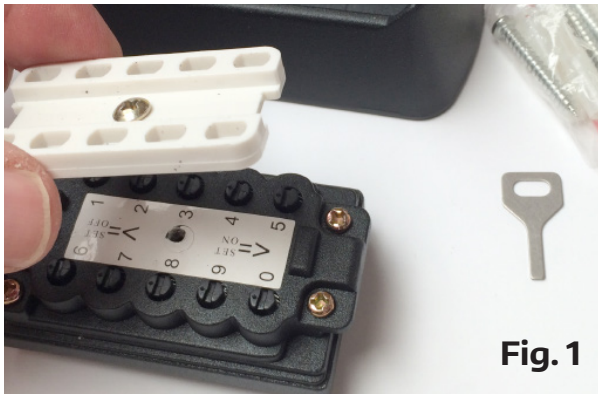


Fig. 1



Fig. 2

## To set your own code:

1. Please choose your code - minimum 3 numbers. Do not duplicate numbers.
2. Inside the cover, remove the screw which retains the white plastic plate (Fig. 1).
3. Once the white cover has been removed, you will see ten small black screws with small arrows facing upwards.
4. With the code setting key provided, turn the arrows adjacent to the required code numbers from facing upwards to facing downwards. E.g. if you code is '1234', the arrows adjacent to the 1, 2, 3, & 4 should be facing downwards while all other arrows should be facing upwards (Fig 2).
5. Slide the black button marked 'CLEAR' down.
6. Replace the white cover.
7. Please note, always use the 'CLEAR' button after trying to open the Key Safe.

## Check the code before closing the cover:

1. Slide the black button marked 'CLEAR' down.
2. Type in the code you have set. You can input your code in any order.
3. Slide the silver button marked 'OPEN' down once. If the button moves and withdraws the latch you have successfully set the code. If you cannot move the silver button, check the code setting procedure and re-test.
4. Once the code is set successfully you may replaced the cover and use the Key Safe as required.