
PCL Euro Coupling Nut Adaptors

BRAND Draper

WARRANTY 12 months

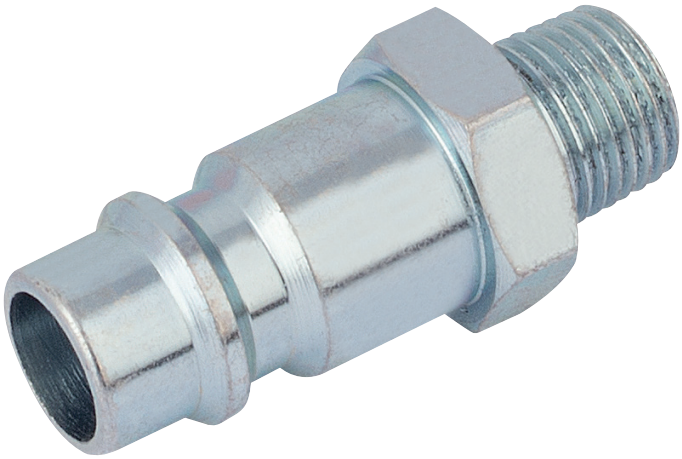

FEATURES

- For heavy duty high flow applications
- Tested to over 1million cycles
- Connects to most popular and European adaptor profiles (Cejn, Rectus etc)
- Zinc passivated to significantly improve corrosion resistance
- Hard wearing steel construction

DESCRIPTION

For heavy duty high flow applications
Tested to over 1 million cycles
Connects to most popular and European adaptor profiles (Cejn, Rectus etc.)
Zinc passivated to significantly improve corrosion resistance
Hard wearing steel construction, Sold loose.

SPECIFICATIONS

Flow capacity at 6 bar inlet and
0.5bar pressure drop: 78cfm (2200L/min)
Max. working pressure: 500psi (35bar)
Test pressure: 725psi (50bar)
Max. burst pressure: 2030psi (140bar)
Temp. range: -40 to 100°C
Nominal flow diameter: 7.4mm

Stock No.	Size	Type
54418	1/8"	F 1/8" BSP
54414	1/8"	M 1/8" BSP
54419	1/4"	F 1/4" BSP
54415	1/4"	M 1/4" BSP
54420	3/8"	F 3/8" BSP
54416	3/8"	M 3/8" BSP
54421	1/2"	F 1/2" BSP
54417	1/2"	M 1/2" BSP

©Draper Tools Limited. All rights reserved