

# SINGLE CYLINDER FOOT PUMP WITH PRESSURE GAUGE

## 14172



## 1. Specification

Stock No.	14172
Part No.	4430
Operating Pressure:	0 – 100psi (0 – 7bar)
Gauge accuracy:	+/- 3%
Hose length (approx.):	600mm

## 2. Health and Safety Information

**Important:** Read all the Health and Safety instructions before attempting to operate this product. Failure to follow these instructions may result in injury or damage to the user or the product.


- **The gauge on this foot pump is intended as a guide only.** After use, **ALWAYS** double check the tyre pressure against a tyre pressure gauge that complies with BS EN 12645.
- **NEVER** exceed the maximum pressure recommended by the manufacturer of the item to be inflated.
- Use foot pump on a flat surface to prevent excessive twisting of frame.
- Ensure that the air hose is neither stretched nor kinked during pumping.
- **ALWAYS** store with frame clip applied. Store carefully, particularly if stored in the car.
- Every 3 months lubricate pivot points with light oil and apply a few drops through the holes in the bottom of the cylinder. Several pumping strokes will be required to distribute the oil.

### 3. Basic Operation

- For efficient pumping action, place foot centrally on the foot plate and use full strokes on the pump.


#### Cars, Motorcycles & Bicycles with Schrader type valves

Unscrew tyre valve cap. Push connector firmly onto the tyre valve & then secure by depressing the thumb lock on the connector - (A).

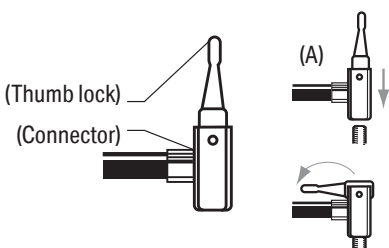

#### Inflatables

For inflatables, use the plastic adaptor; simply press connector (B) onto top of plastic adaptor and secure by depressing the thumb lock onto the connector.

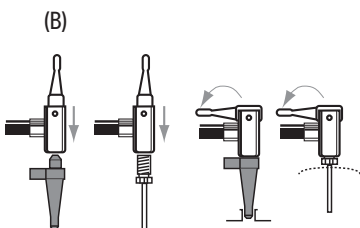

#### Sports Balls

Use the needle valve.



#### Bicycles with Woods valves

Screw adaptor (C) firmly onto the Woods valve.

