

Product information

12 40 200

KNIPEX EvoStrip Self-Adjusting Insulation Stripper



MM

- Effortless stripping in a large capacity range from 0.03 to 10.0 mm² / AWG 32 - 8
- No damage to the conductors thanks to automatic adaptation to different conductor cross-sections
- With its two-component handle and comfortable handle width, it sits comfortably in the hand and the ingenious handle design minimizes the risk of hand injuries
- For thin ribbon cables up to 10.0 mm width in a single pass
- Versatile applications thanks to generous stripping range of 3 - 22 mm, and up to 25 mm without length stop
- Adjustable setting wheel in fine increments: The adjustable cutting depth allows the pliers to master the most demanding insulation jobs – even under extreme temperature conditions
- Top-mounted cable cutter for copper and aluminium conductors offers maximum visibility: Embossed, visible and tangible arrow always shows the exact cutting position, clean cuts thanks to optimised cutting edge geometry for finely stranded conductors up to 10 mm², solid conductors up to 6 mm²
- For solid, multi-stranded and finely stranded conductors with plastic or rubber insulation, also for ribbon cables up to 10 mm wide
- Raised, non-slip handle collar in front of the cable cutter provides reliable grip
- With integrated tether attachment point in the handle: For reliable tool protection when working at heights, ANSI-compliant and compatible with KNIPEX Tethered Tools tethering system
- Smooth-running mechanism guarantees long-term performance, comfortable working due to low noise levels
- High-quality, wear-resistant stripping blades and glass fibre reinforced plastic ensure long-lasting performance – for thousands of stripping cycles without compromise. Blades can be replaced quickly and cost-effectively when worn.



General	
Part No.	12 40 200
EAN	4003773026662
Weight	202 g
Dimensions	200 x 95 x 21 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable


technical change and errors excepted



Integrierter Kabelschneider bis 10 mm² feindrchtig, 6mm² eindrchtig!



fastening device on the end of the handle (drop protection system)

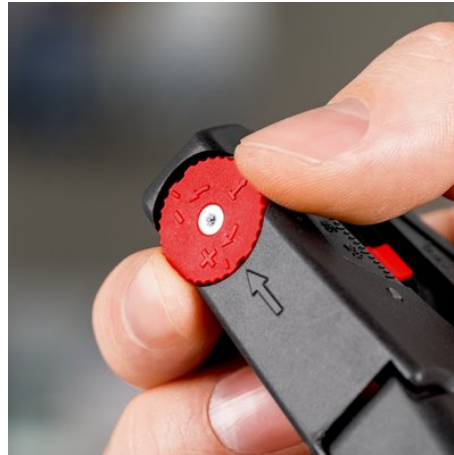

For special requirements, such as particularly hard or soft insulation materials, optimum fine adjustments can be made using the adjusting wheel with its tactile locking positions



Adjustable length stop

