




# PCL Euro Coupling Nut Adaptors

BRAND Draper

WARRANTY 12 months

## FEATURES

- For heavy duty high flow applications
- Tested to over 1million cycles
- Connects to most popular and European adaptor profiles (Cejn, Rectus etc)
- Zinc passivated to significantly improve corrosion resistance
- Hard wearing steel construction

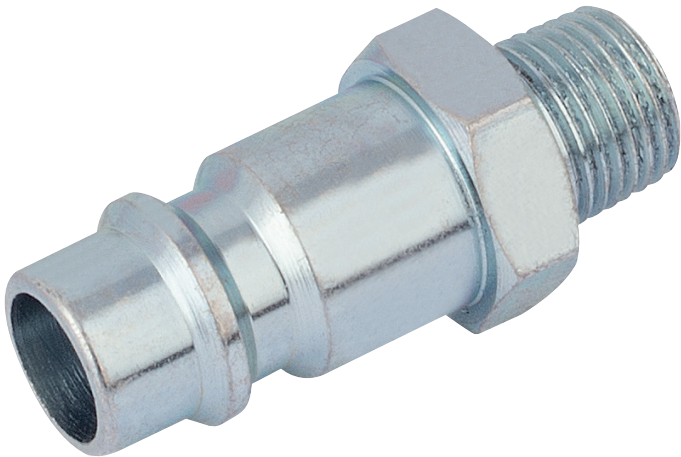

## DESCRIPTION

For heavy duty high flow applications

Tested to over 1 million cycles

Connects to most popular and European adaptor profiles (Cejn, Rectus etc.)

Zinc passivated to significantly improve corrosion resistance

Hard wearing steel construction, Sold loose.

## SPECIFICATIONS

Flow capacity at 6 bar inlet and

0.5bar pressure drop: 78cfm (2200L/min)

Max. working pressure: 500psi (35bar)

Test pressure: 725psi (50bar)

Max. burst pressure: 2030psi (140bar)

Temp. range: -40 to 100°C

Nominal flow diameter: 7.4mm

| Stock No. | Size | Type       |
|-----------|------|------------|
| 54418     | 1/8" | F 1/8" BSP |
| 54414     | 1/8" | M 1/8" BSP |
| 54419     | 1/4" | F 1/4" BSP |
| 54415     | 1/4" | M 1/4" BSP |
| 54420     | 3/8" | F 3/8" BSP |
| 54416     | 3/8" | M 3/8" BSP |
| 54421     | 1/2" | F 1/2" BSP |
| 54417     | 1/2" | M 1/2" BSP |