
PCL Euro Couplings

BRAND Draper

WARRANTY Consumable Warranty

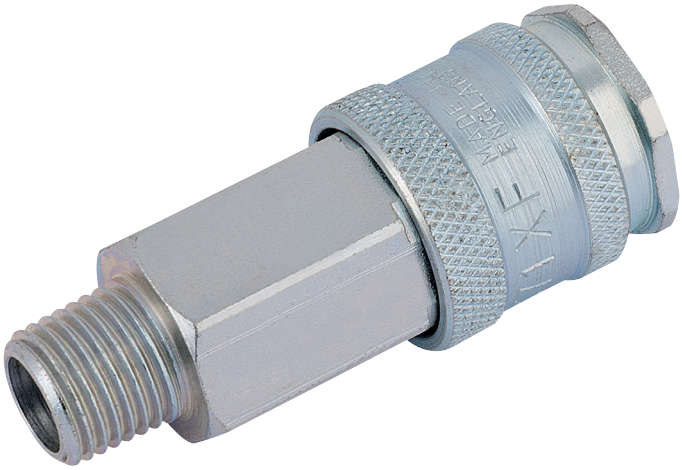

FEATURES

- For heavy duty high flow applications
- Tested to over 1 million cycles
- Connects to most popular industrial and European adaptor profiles (Cejn, Rectus etc)
- Zinc passivated

DESCRIPTION

For heavy duty high flow applications
BSP parallel
Tested to over 1 million cycles
Connects to most popular and European adaptor profiles (Cejn, Rectus etc.)
Zinc passivated to significantly improve corrosion resistance
Hard wearing steel construction, Sold loose.

SPECIFICATIONS

Flow capacity at 6 bar inlet and
0.5bar pressure drop: 78cfm (2200L/min)
Max. working pressure: 500psi (35bar)
Test pressure: 725psi (50bar)
Max. burst pressure: 2030psi (140bar)
Temp. range: -40 to 100°C
Nominal flow diameter: 7.4mm

Stock No.	Size	Type
54407	1/4"	Female
54404	1/4"	Male
54408	3/8"	Female
54405	3/8"	Male
54409	1/2"	Female
54406	1/2"	Male

©Draper Tools Limited. All rights reserved