

DRAPER

EN

Original Instructions
Version 1
January 2026

BRAKE FLUID TESTER

30352



UK
CA CE

User Manual for: Brake Fluid Tester

Stock No.: 30352

Part No.: BFTP

Read this manual in full before using this product and retain it for future use. Always use the latest version of the manual. Please visit drapertools.com/manuals for the latest version.

1. Intended Use

This product is designed to check the water content in brake fluid (Compatible Brake Fluid: DOT 3/DOT 4/ DOT 5.1 and ENV4/ENV6.).

Any other application beyond the conditions established for use will be considered misuse. Draper Tools accepts no responsibility for improper use of this product.

2. Health and Safety Information


- **Important:** Read this leaflet and retain it for future use.

CAUTION! Always wear safety goggles and gloves when working with brake fluid. If the brake fluid comes into contact with skin, wash off immediately and seek medical advice if necessary.


- **Always** clean the tester probes after every use and replace the cover for storage.
- Remove the battery when storing the tester for extended periods.

3. Identification

1. Fluid quality indicator
2. Clip
3. Power button
4. Battery compartment cover
5. Probes
6. Probe cover

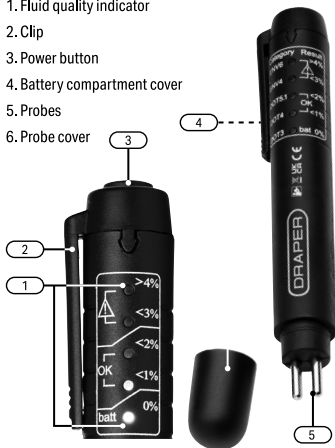

4. Instructions for use

1. Unclip the battery compartment cover (4) and fit an AAA battery (not supplied). Check that the battery is fitting in the correct +/- orientation. 
2. Press the power button (3) to activate the tester and the 'battery 0%' light will illuminate. If the light does not come on the battery needs replacing or is incorrectly inserted.
3. Remove the cover (6) from the probes (5). Then dip the tester into the brake fluid until the probes are fully submerged and hold for 1 second. The fluid quality indicators (1) will be displayed as follows: -

Fluid Quality Indicator	Water Content	Action Required
Green light / Batt 0%	No water / Battery OK	No action
Green light/OK	<1% water	No action
Yellow/Green light/OK	<2% water	Check fluid regularly
Red Lights	<3% water	Change the brake fluid
Red Lights	>4% water	Change the brake fluid immediately.

- Auto switch off after approximately 10 seconds.
- 4. Clean the probes after use and replace the cover.
- At the end of its working life, dispose of the product responsibly and in line with local regulations. Recycle where possible.

Warranty

12 months – Visit drapertools.com/warranty for full details.

Contact Details

Draper Tools, Draper Tools Limited, Hursley Road, Chandler's Ford, Eastleigh, Hampshire, SO53 1YF, UK

Website: drapertools.com

Email: sales@drapertools.com

Product Helpline: +44 (0) 23 8049 4344

Telephone Sales Desk: +44 (0) 23 8049 4333

General Enquiries: +44 (0) 23 8026 6355

Please contact the Draper Tools Product Helpline for repair and servicing enquiries.

Draper Tools Europe B.V.

Oude Graaf 8, 6002 NL, Weert, Netherlands