

## Relays


S351

Universal timer relay module with two timing ranges 1 - 60 sec's & 1 - 60 mins. Volt free DPCO relay contacts are rated at 2A/30vdc resistive. Multiple trip modes. Astable operation for pulsing sounders etc. This versatile unit can also be used as a commutating relay ie one pulse energises the relay and a further pulse deenergises the relay.

Specification	S351
Led Current	N/A
Switch Contacts	DPCO contacts rated at 2A
Visual Indication	1 x Red 1 x Green
Integral Sounder Level	N/A
Supply Voltage	12vdc or 24vdc
Supply Input Current	10mA quiescent 90 mA max
Tamper	N/A
Material	PCB module
Dimensions	75 x 80 x 14 mm
Weight	0.095kg
IP Rating	N/A
Approvals	UKCA and CE marked, ROHS compliant

## Benefits and Features

- Holes provided for permanent fixing
- 12 or 24 vdc
- Manufactured in the UK
- Timing ranges 1 - 60 sec's & 1 - 60 mins

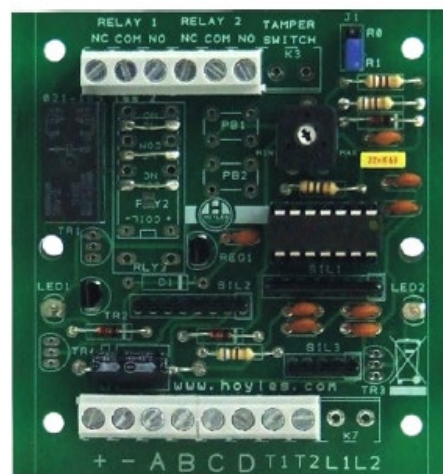

## Boxed versions available

S351-B 12 or 24 vdc powered

