


PANEL CONNECTORS

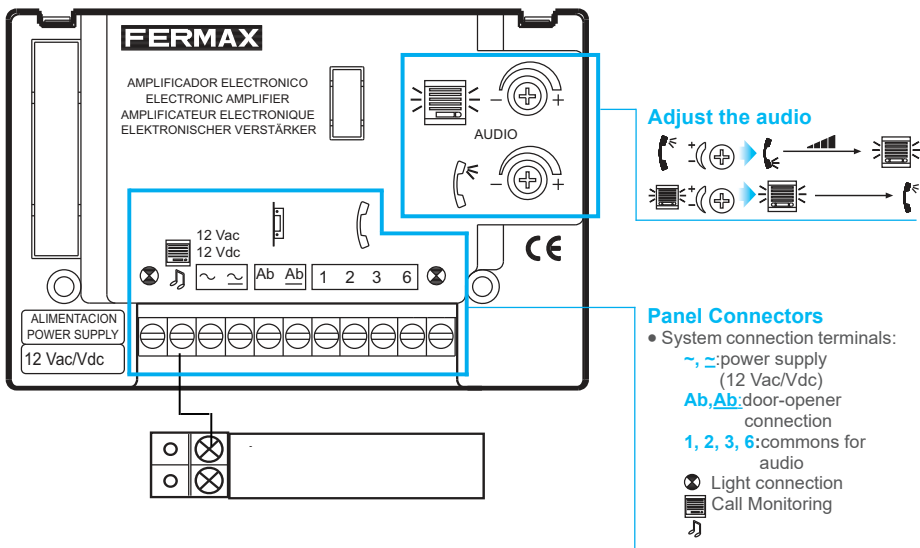

TECHNICAL FEATURES

OUTDOOR PANEL

Power Supply	12 Vac / 12 Vdc
Consumption	
in standby	40 mA
audio active	250 mA
lighting	70 mA
Temperatura de funcionamiento	[-25°C, +70°C] / [-13°F, +158°F]
Audio power from the apartment to the panel	1W
Audio power from the panel to the apartment	0,15 W
Adjustable volume both ways	


TELEPHONE

Operating Temperature	[5, +40°C] / [41, +104°F]
Electronic call	8, 12 Vpp
Speaker	1.75" 16 W
Microphone: Electret. Dinamic Resistance 50	



WIRING DIAGRAM

WIRING DIAGRAM KIT 2L - 24L

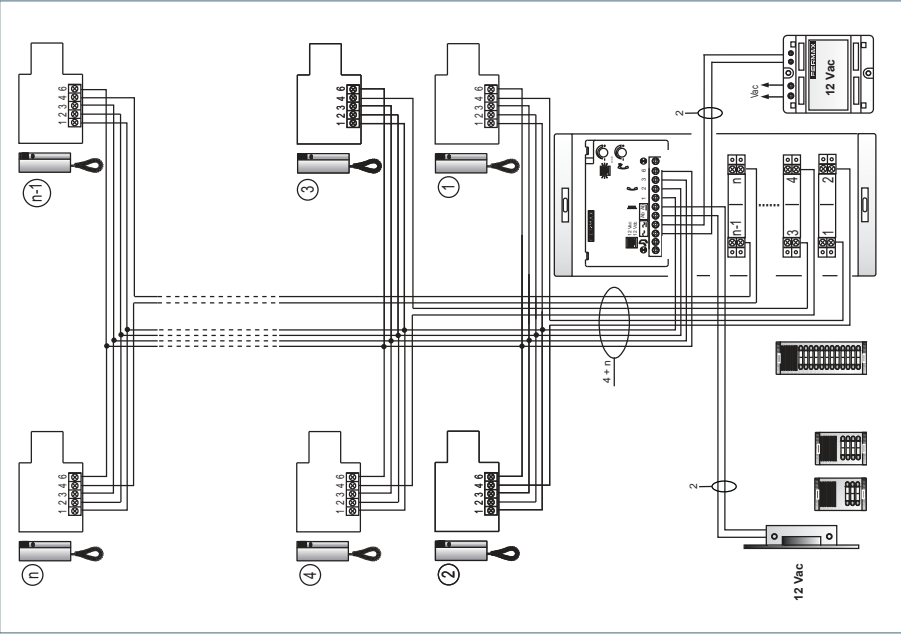

WIRING DIAGRAM KIT 1L

