

Net2 Entry Touch Panel

System specifications

Yes - IEEE 802.3af class 0 Power over Ethernet (PoE)

Ethernet bandwidth requirement 1Mb/s multicast per panel during call

Panels per system

100m / 328 ft TCP/IP ethernet extension limit

Cable type

Token compatibility

Paxton, EM4100/02, MIFARE®, MIFARE® Classic, MIFARE® DESFire® EV1, MIFARE Plus®, MIFARE Ultralight®, MIFARE Ultralight C®, MIFARE Mini®, HID® Prox (activiation required)

Other hardware features

Full Duplex Audio system

Camera system Full Colour

Yes - only in conjunction with Net2 software PIN/Code entry

Proximity entry

Optional IDC connector

Colour Black

LCD display

Touch mode Capacitive

Anti glare coating

Auto brightness Yes

Low light LED

Optically bonded Yes

Material 316L Stainless Steel

Marine Grade

Yes

Operating temperature

-20°C - +50°C -4°F - +122°F

Moisture resistance Impact resistance

IPX5 IK7




The Net2 Entry panel is a robust door entry panel incorporating both door entry and access control functions. It is powered using power over Ethernet (PoE) and communicates with the other elements of the system using IPv6, providing 'plug and play' installation. Each panel is associated with a Net2 Entry control unit which is the interface to the door hardware.

The panel is equipped with a keypad and a proximity token reader. A resident can use either the keypad or a token to gain entry. Installers gain access to the menu options using an engineer code or an engineer token.

Net2 software is used to administer the access control functions.

Decide how the units are to be connected. You can either run your own wired network or (with the owner's permission) share the buildings existing data network. If using the owners network, the system uses IPv6 protocol and PoE (Power over Ethernet) so the network must support this switch type.

DS1063

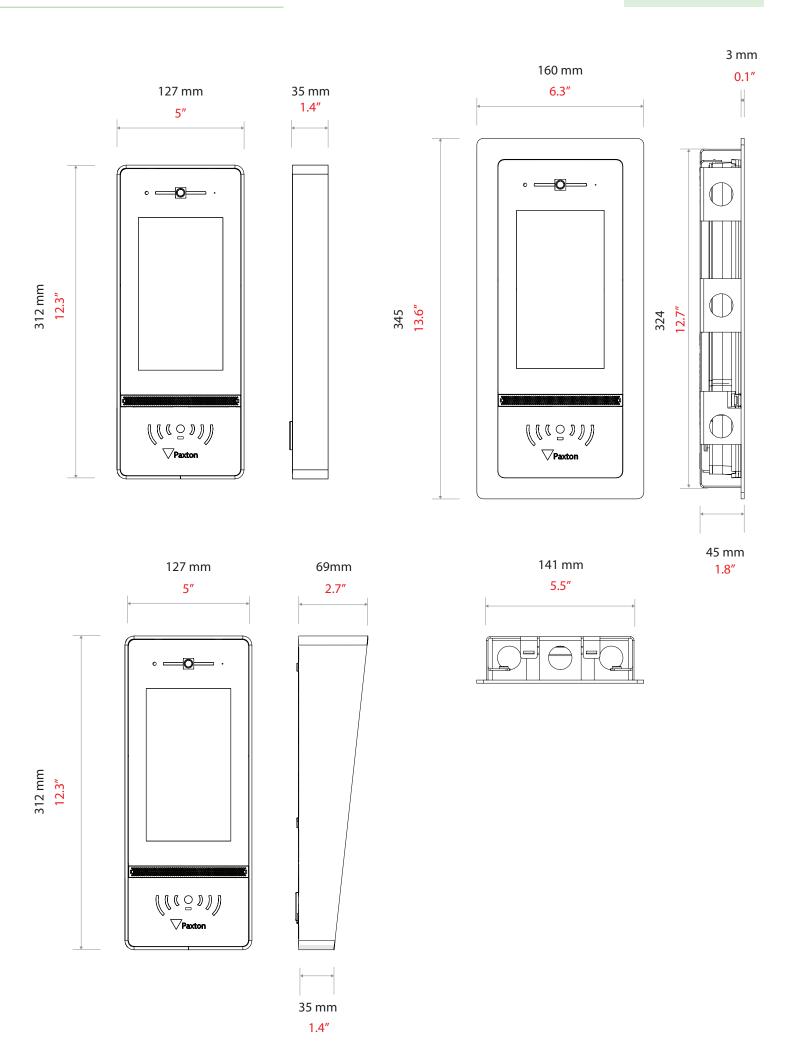

Net2 Entry - Touch panel, surface mount	337-620
Net2 Entry - Touch panel, surface mount with rain hood	337-610
Net2 Entry - Touch panel, flush mount	337-600
Net2 Entry - Touch panel, demonstration case	337-630

