

# Double Action Door Closer Kit



The Rutland Double Action Door Closer Kit is a comprehensive, all-in-one solution designed specifically for double action doors. It enables smooth and controlled door operation with a maximum opening angle of 110° in both directions, making it suitable for a wide range of commercial and public building applications.

The kit set includes a high-performance door closer based of the highly demanded ITS.11204 single action concealed, a top double action door pivot, and a heavy-duty bottom pivot, along with the required intumescent and smoke seals to support fire door integrity. All components have been tested together and are suitable for use on FD60 fire doors.

Detailed installation instructions are provided to ensure correct fitting and reliable performance. Supplied in a single, convenient package, the Rutland Double Action Door Closer Kit simplifies specification, installation, and compliance.



Assists BS8300



FD60  
Timber Doors



Max Door  
Width  
1100mm



5  
YEARS  
Guarantee



Two-Stage  
Speed Regulation

### Key Features:

- Complete all-in-one kit for double action doors
- 110° Opening angle in both directions
- Tested and compliant to EN1634-1 60 minute fire rating
- Smoke tested to EN1634-3
- Detailed installation instructions

### Product Features

Opening Angle	110°
Door Width	660-1100mm
Max Door Weight	<110kg
Power Adjustment	By Spring
Hold Open (not for fire doors)	-
Back Check	Optional (Mechanical)

### Certification Compliance

CE	✓
BS EN 1154	✓
BS EN 1634	✓

Key: ✓ Yes    - No    Option



### Finishes



SE  
Silver








SNP  
Satin Nickel



1812

Product Code	Re-order code	Description
ITS.11204.DAX.FLFR.SE	12522	Double Action Door Closer Kit - Silver includes Intumescent
ITS.11204.DAX.FLFR.SNP	12543	Double Action Door Closer Kit - Satin Nickel includes Intumescent

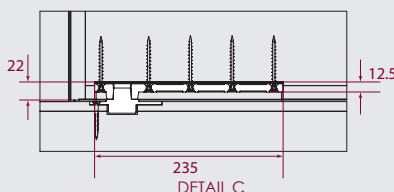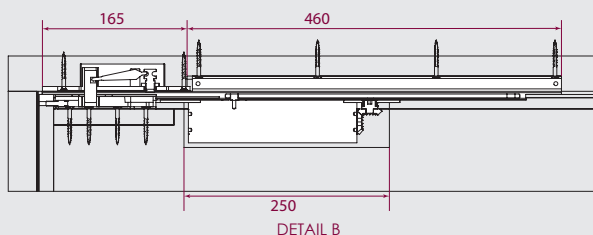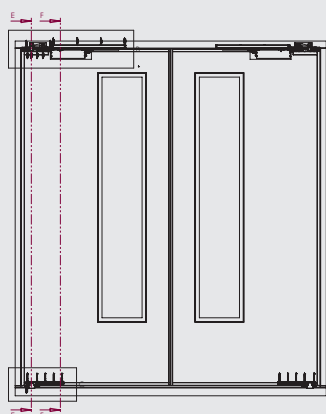

Pivot Centre to Door edge suggest 54-56mm  
Final dimensions are subject to the fitting instruction.