


MEASURING ACCURACY OF ROUGHNESS TESTERS CAN BE IMPROVED, IF THE CALIBRATION IS MADE ON A REFERENCE SPECIMEN WITH THE ROUGHNESS VALUE CLOSE TO THE WORKPIECE TO BE MEASURED

## SURFACE ROUGHNESS REFERENCE SPECIMENS

**INSIZE** PLUS  
MADE IN EUROPE

- To calibrate roughness testers
- Meets ISO 5436-1: 2000
- Rust proof, made of pure Nickel

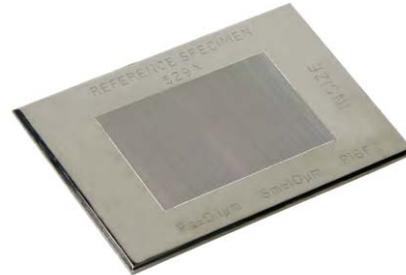

ISR-RS529X

Code	Roughness (Ra)
ISR-RS525X	6.25 $\mu\text{m}$ *
ISR-RS526X	3.15 $\mu\text{m}$ *
ISR-RS527X	3.0 $\mu\text{m}$ *
ISR-RS528X	0.5 $\mu\text{m}$ *
ISR-RS529X	0.1 $\mu\text{m}$ *
ISR-RS530X	1.0 $\mu\text{m}$ *
ISR-RS531X	0.3 $\mu\text{m}$ *

\*The actual value may be slightly different