


A-D SEE TABLE**Beam Clamps**

Suitable for semi-permanent attachment to steel beams and acts as a lifting point for chain blocks, hoists and lifting tackle. The clamp may also be used for lifting and transfer of steel beams and as a pulling clamp. Low profile afforded by integral pivot/lifting point.

**IMPORTANT SAFETY INFORMATION**



Always ensure that the load to be slung does not exceed the rated capacity of the equipment being used. Also ensure that the structure to which the trolley or winch is attached meets or exceeds the safety parameters which are specified by the HSE. Do not allow the load to swing during operation, and do not subject winches, pulleys, beam clamps and straps to shock loads.

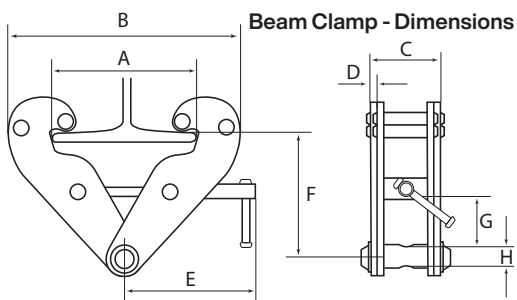


See our range of Safety Gloves on pages 1284-1287

A-D


	A	B	C	D
Model No:	BC1000	BC2000	BC3000	BC5000
Capacity:	1000kg	2000kg	3000kg	5000kg
Adjustable Beam Width:	75-220mm	75-220mm	80-320mm	80-320mm
A:	260mm	260mm	354mm	354mm
B:	180-360mm	180-360mm	235-490mm	235-490mm
C:	64mm	74mm	103mm	110mm
D:	5mm	6mm	8mm	10mm
E:	215mm	215mm	260mm	260mm
F:	102-155mm	102-155mm	140mm	140mm
G:	25mm	25mm	45mm	45mm
H:	Ø22mm	Ø22mm	Ø24mm	Ø28mm
Weight:	4.2kg	4.95kg	9.1kg	10.9kg

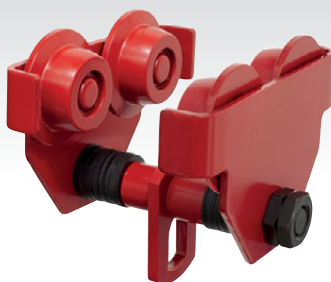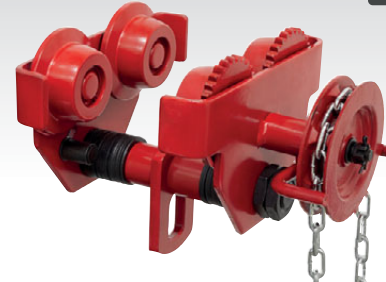E**Plain****Geared**

Plain Block Trolley Dimensions

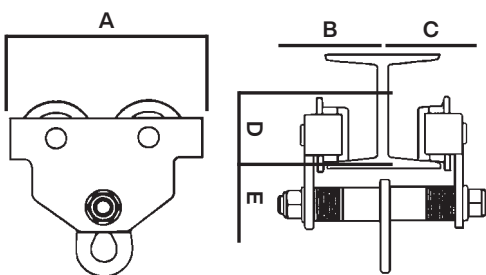


Geared Block Trolley Dimensions

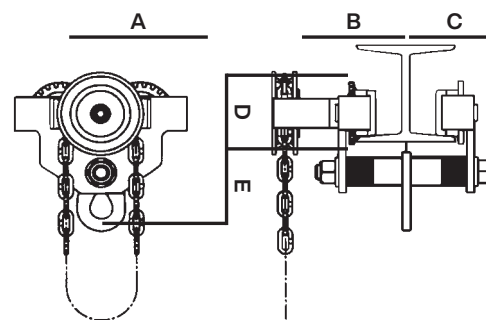**E SEE TABLE BELOW****Plain & Geared Block Trolleys**

Suitable for use with our lever hoists or chain blocks. Designed for mounting onto an I-beam or RSJ to allow load to be manoeuvred sideways. Incorporates wheel guards to prevent contact with other trolleys mounted on same load bearer.

Model No:	PT500	PT1000	PT1000G	PT2000	PT3000	PT3000G
Type:	Plain	Plain	Geared	Plain	Plain	Geared
Capacity:	500kg	1000kg	1000kg	2000kg	3000kg	3000kg
Test Load:	750kg	1500kg	1500kg	3000kg	4500kg	4500kg
Track Width Adjustable Range:	64-140mm	64-140mm	64-140mm	76-165mm	76-203mm	76-203mm
Minimum Curve Radius:	800mm	1000mm	1000mm	1300mm	1500mm	1500mm
A:	212mm	255mm	255mm	305mm	344mm	344mm
B:	115mm	127.5mm	205mm	150mm	172mm	250mm
C:	115mm	127.5mm	135mm	150mm	172mm	180mm
D:	90mm	104mm	104mm	130mm	145mm	150mm
E:	115mm	128mm	128mm	152mm	186mm	200mm
Weight:	7kg	13kg	17kg	20kg	31kg	41kg
Min. Standard I-Beam Dimensions (D x W x Web):	125 x 75 x 5.5mm	125 x 75 x 5.5mm	125 x 75 x 5.5mm	180 x 100 x 6mm	200 x 100 x 7mm	200 x 100 x 7mm
Max. Standard I-Beam Dimensions (D x W x Web):	250 x 125 x 7.5mm	250 x 125 x 7.5mm	250 x 125 x 7.5mm	350 x 150 x 9mm	850 x 150 x 9mm	850 x 150 x 9mm
Min. Distance Between Spans:	3000mm	2500mm	2500mm	3000mm	2700mm	2700mm

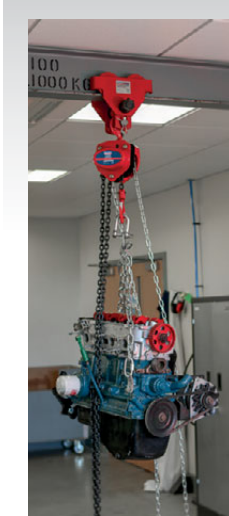

A-E SEE RIGHT

Chain Blocks

Fitted with heat treated and ground, triple-spur geared shaft and pinion. Also includes mechanical load brake for extra safety. All chains are manufactured from hardened alloy material and load hooks feature safety latches. Compact gear housing allows use where headroom is limited.

	A	B	C	D	E
Model No:	CB500	CB1000	CB2000	CB3000	CB5000
Safe Working Load:	500kg	1000kg	2000kg	3000kg	5000kg
Test Load:	750kg	1500kg	3000kg	4500kg	7500kg
Standard Lift:	2.5m	2.5m	3m	3m	3m
Load Chain Diameter:	Ø6mm	Ø6mm	Ø8mm	Ø8mm	Ø10mm
Pulling Effort:	23.5kgf	31.5kgf	36.7kgf	34.67kgf	42.22kgf
Head Room:	295mm	317mm	470mm	530mm	588mm
Size (W x D):	127 x 131mm	140 x 158mm	187 x 161mm	199 x 161mm	186 x 253mm
Hook Aperture:	25mm	23mm	33mm	35mm	50mm
Maximum Hook Capacity:	Ø35mm	Ø40mm	Ø45mm	Ø50mm	Ø65mm
Weight:	10kg	12kg	19kg	25kg	43kg



F LH251

250kg Mini Lever Hoist

Lightweight and compact design makes this hoist easy-to-use in very confined working conditions. Features drop-forged and heat treated pinion gear with totally enclosed mechanism. Hooks are fitted with safety catches and rotate 360°. Free-chaining feature permits slack in the load chain to be taken up by hand before engaging the ratchet arm. Fitted with high quality durable alloy steel chain.

G-J SEE RIGHT

Lever Hoists

Rugged construction features drop-forged and heat treated pinion gear with totally enclosed mechanisms. All models equipped with heavy-duty brake and high quality alloy steel chain for durable and safe operation. Free-chaining feature permits slack in the load chain to be taken up by hand before engaging the ratchet arm.



	F	G	H	I	J
Model No:	LH251	LH750	LH1000	LH1500	LH3000
Capacity:	250kg	750kg	1000kg	1500kg	3000kg
Chain Falls:	1	1	1	1	1
Chain Length:	1.2m	1.5m	1.5m	1.5m	1.5m
Head Room:	220mm	275mm	295mm	295mm	400mm
Hook Aperture:	20mm	25mm	30mm	30mm	40mm
Lever Length:	160mm	280mm	410mm	410mm	410mm
Load Chain Diameter:	Ø4mm	Ø6mm	Ø8mm	Ø8mm	Ø10mm
Maximum Hook Capacity:	Ø30mm	Ø37mm	Ø45mm	Ø45mm	Ø50mm
Weight:	1.80kg	7kg	12kg	12kg	19.02kg
Operating Clearance:	60mm	99mm	104mm	104mm	108mm
Pull on Lever to Lift Full Load:	25kgf	14kgf	24kgf	24kgf	33kgf
Size (W x D):	85 x 92mm	136 x 148mm	160 x 172mm	160 x 172mm	180 x 200mm
Test Load:	375kg	1125kg	1500kg	2250kg	4500kg