

SERIES 395,115 – Tube Micrometers

- MeasurLink®** **ENABLED**
Data Management Software by Mitutoyo



395-351-30



115-115

Inch/Metric

Code No.	Range	Resolution	Accuracy*	D	
Digimatic					
395-351-30	0 - 1" (0-25.4 mm)	.00005" (0.001 mm)	±.0001" (±2 µm)	ø.59" (ø15 mm)	
395-352-30	1 - 2" (25.4 - 50.8 mm)				
395-353-30	2 - 3" (50.8 - 76.2 mm)		±.00015" (±3 µm)	ø.75" (ø19 mm)	
395-354-30	3 - 4" (76.2 - 101.6 mm)				

Metric


Code No.	Range	Graduation	Accuracy	D	
115-101	0-15 mm	0.01 mm	±3 μm	ø5.5 mm	
115-115	0-25 mm			ø10 mm	
115-116	25-50 mm			ø11 mm	
115-117	50-75 mm			ø17 mm	
115-118	75-100 mm		±4 μm	ø18 mm	

Inch

Code No.	Range	Graduation	Accuracy	D	
115-153	0 - 1 "	.0001 "	±.00015 "	ø.40 "	

* Excluding quantizing error.

Dimensions

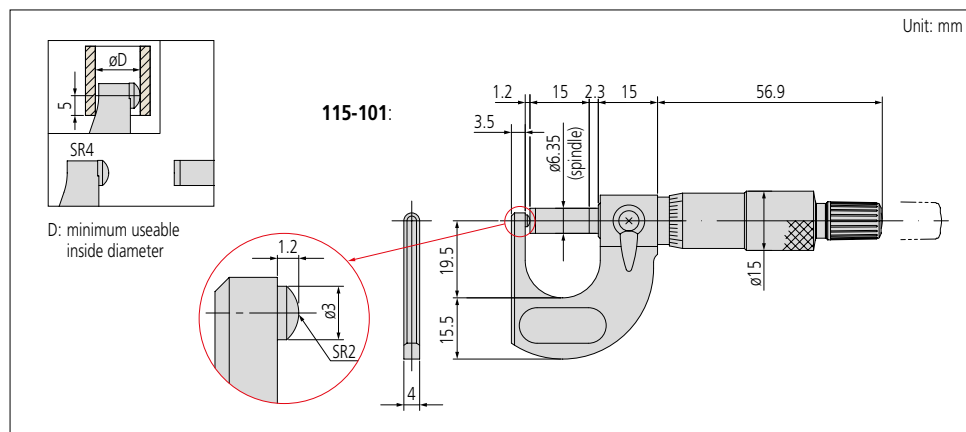

Unit: mm

Flatness: .000024" / 0.6 µm: 115 series
 .000012" (0.3 µm): 395 series
 Battery: SR44 (1 pc), **938882**: 395 series

Code No.	Description	
264-622	U-WAVE-TM transmitter	
02AZF310	U-WAVE-TM connection unit	
05CZA662	SPC data cable with pushbutton (1 m)	
05CZA663	SPC data cable with pushbutton (2 m)	
06AFM380B	USB input tool direct USB-ITN-B (2 m)	

