



## DTFNR/L



TN□□

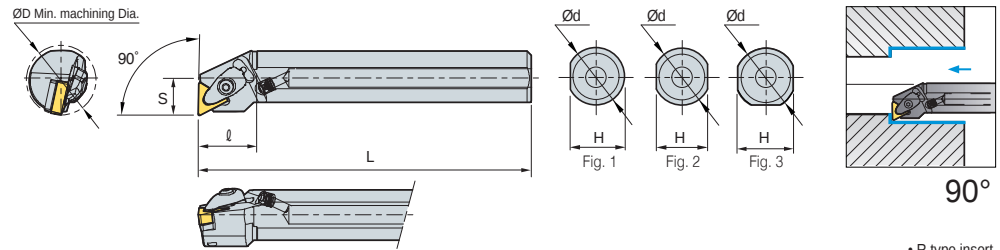

• R type insert (mm)


| Designation     | ØD | Ød | H  | L   | S  | l  | Insert     | Clamp | Clamp Screw | Shim  | Shim Screw | Spring  | Nozzle | Wrench | Fig. |
|-----------------|----|----|----|-----|----|----|------------|-------|-------------|-------|------------|---------|--------|--------|------|
| A25R-DTFNR/L-16 | 32 | 25 | 24 | 200 | 17 | 40 | TN□□1604□□ | CVH3  | CHX0415     | ST32V | FTKA0307   | SPR0510 | CN0605 | HW25P  | 1    |
| A32S-DTFNR/L-16 | 40 | 32 | 30 | 250 | 22 | 50 |            |       |             |       |            |         |        |        | 3    |
| A40T-DTFNR/L-22 | 50 | 40 | 38 | 300 | 27 | 60 |            |       |             |       |            |         |        |        |      |
| A50U-DTFNR/L-22 | 63 | 50 | 47 | 350 | 35 | 70 | TN□□2204□□ | CVH4  | CHX0518     | ST44V | FTKA0410   | SPR0714 | CN0605 | HW30P  | 3    |

➔ Applicable inserts B58-B65

## DWLNR/L



WN□□

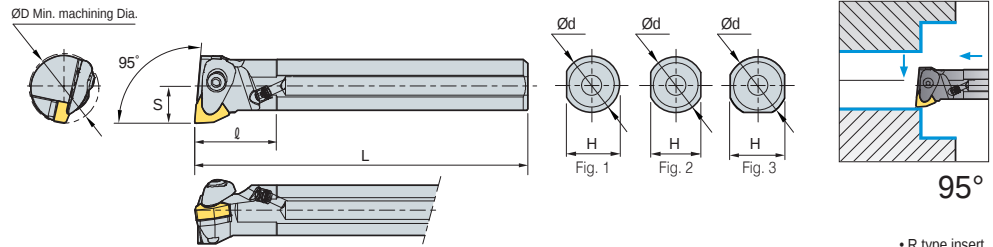

• R type insert (mm)

| Designation     | ØD | Ød | H  | L   | S  | l  | Insert     | Clamp | Clamp Screw | Shim  | Shim Screw | Spring  | Nozzle | Wrench | Fig. |
|-----------------|----|----|----|-----|----|----|------------|-------|-------------|-------|------------|---------|--------|--------|------|
| A25R-DWLNR/L-06 | 32 | 25 | 24 | 200 | 17 | 40 | WN□□0604□□ | CVH3  | CHX0415     | SW32V | FTKA0307   | SPR0510 | CN0605 | HW25P  | 1    |
| A32S-DWLNR/L-06 | 40 | 32 | 30 | 250 | 22 | 50 |            |       |             |       |            |         |        |        | 3    |
| A40T-DWLNR/L-06 | 50 | 40 | 38 | 300 | 27 | 60 |            |       |             |       |            |         |        |        |      |
| A25R-DWLNR/L-08 | 32 | 25 | 24 | 200 | 17 | 40 | WN□□0804□□ |       |             |       |            |         |        |        | 1    |
| A32S-DWLNR/L-08 | 40 | 32 | 30 | 250 | 22 | 50 |            |       |             |       |            |         |        |        |      |
| A40T-DWLNR/L-08 | 50 | 40 | 38 | 300 | 27 | 60 |            |       |             |       |            |         |        |        |      |
| A50U-DWLNR/L-08 | 63 | 50 | 47 | 350 | 35 | 70 |            | CVH4  | CHX0518     | SW42V | FTKA0410   | SPR0714 | CN0605 | HW30P  | 3    |

➔ Applicable inserts B68-B72



### Features of Double Clamp (Boring bar)

Longer tool life and excellent surface finish can be achieved with the adjustable Coolant Nozzle

