



DTFNR/L



TN□□

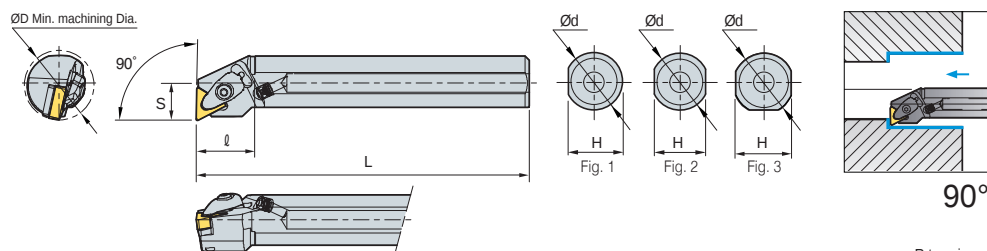

• R type insert (mm)


Designation	ØD	Ød	H	L	S	l	Insert	Clamp	Clamp Screw	Shim	Shim Screw	Spring	Nozzle	Wrench	Fig.
A25R-DTFNR/L-16	32	25	24	200	17	40	TN□□1604□□								1
A32S-DTFNR/L-16	40	32	30	250	22	50									3
A40T-DTFNR/L-22	50	40	38	300	27	60									
A50U-DTFNR/L-22	63	50	47	350	35	70	TN□□2204□□								3

➔ Applicable inserts B58-B65

DWLNR/L



WN□□

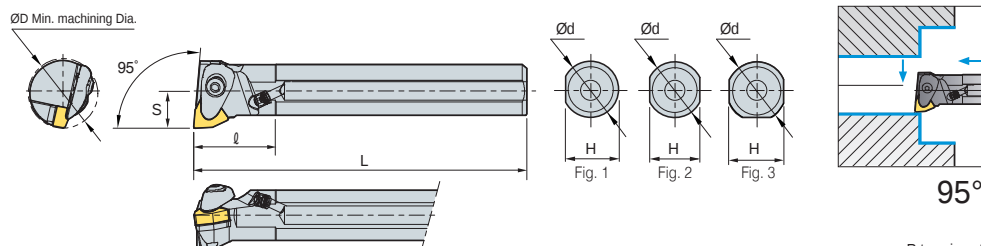

• R type insert (mm)

Designation	ØD	Ød	H	L	S	l	Insert	Clamp	Clamp Screw	Shim	Shim Screw	Spring	Nozzle	Wrench	Fig.
A25R-DWLNR/L-06	32	25	24	200	17	40	WN□□0604□□								1
A32S-DWLNR/L-06	40	32	30	250	22	50									3
A40T-DWLNR/L-06	50	40	38	300	27	60									
A25R-DWLNR/L-08	32	25	24	200	17	40	WN□□0804□□								1
A32S-DWLNR/L-08	40	32	30	250	22	50									
A40T-DWLNR/L-08	50	40	38	300	27	60									3
A50U-DWLNR/L-08	63	50	47	350	35	70									

➔ Applicable inserts B68-B72



Features of Double Clamp (Boring bar)

Longer tool life and excellent surface finish can be achieved with the adjustable Coolant Nozzle

