

Product Finish: Chrome / black

Product code: AT1247
EAN13 barcode: 5060344153553



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Supplied complete with flexible tail pipes for fast simple fitting
- Quarter turn handle action for precise flow control
- Additional jet spray function
- Solid and functional European architect design styling
- Antisplash spout supplied as standard

Additional information / Parts included:

Includes triangular stabilising bracket, 1 x 2.0mm 1 x 2.5mm A/F Allen key - sco06028 kit

Product dimensions:

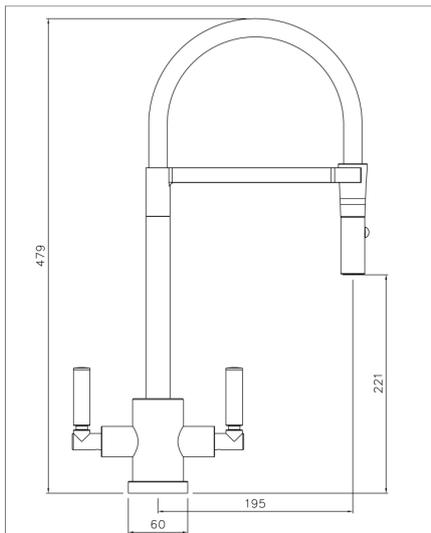

ATLAS MONO
PROFESSIONAL V1

abode

(c) abode home products ltd
www.abode.co.uk
our policy is to continually
improve our products and
services. We reserve the right to
change specifications without
prior notice.

- Overall Height / projection: 479 mm
- Exit reach: 195 mm
- Exit height: 221 mm
- Centre distance(s):


- Base diameter(s): 60 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 45 mm

- Spout diameter: 24 mm
- Spout aerator size: 22f

Packaged properties:

- Box length: 575mm
- Box depth: 80mm
- Box width: 350mm
- Units per outer: 5
- Tap only weight: 3.17kg
- Boxed weight: 2.20kg

Product flow characteristics:

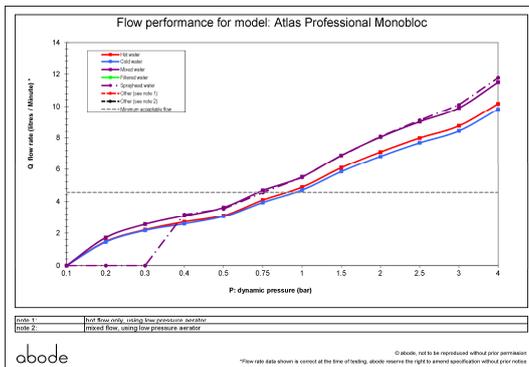

- Min / Max water pressure: 0.75 / 5.50 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 10.10

- Control valve type: Ceramic disc QT
- Product flow characteristics: Single flow
- Non return valve(s): Integral to hot & cold inlets

- Aerator type: Amfag aerator dual jet
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M12 / 1/2" BSP Male
- Inlet pipe type / length: flexible stainless braided hose / 260 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year