

Product Finish: Chrome

Product code: AT1260
EAN13 barcode: 5060344153683



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product features:

Metal construction throughout

Supplied complete with flexible tail pipes for fast simple fitting

Single lever control for effortless single handed control

Grey nylon spout hose for stylish durability


Antisplash spout supplied as standard

Additional information / Parts included:

The installation of this product should respect requirement IRN R090.

Includes triangular stabilising bracket - sco06054 kit, lead hose weight, SP4460 Flexi tails

Product dimensions:

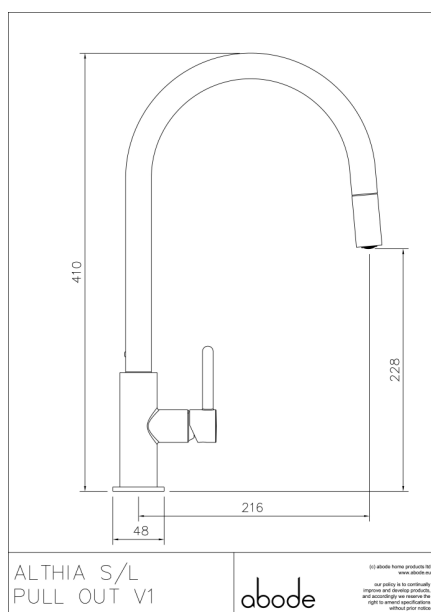

- **Overall Height / projection:** 410 mm
- **Exit reach:** 216 mm
- **Exit height:** 228 mm
- **Centre distance(s):**

- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 55 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** M21.5x1

Packaged properties:

Box length: 575mm

Box depth: 80mm


Box width: 350mm

Units per outer: 5

Tap only weight: 2.25kg

Boxed weight: 0.63kg

Product flow characteristics:

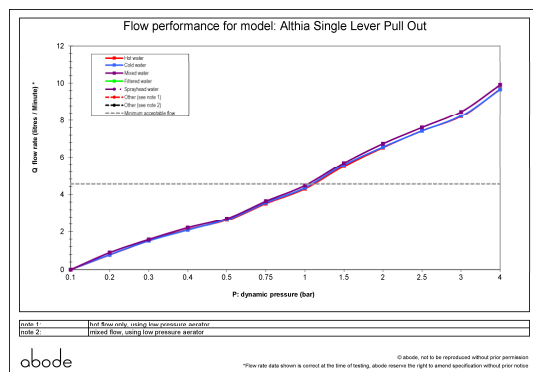

- **Min / Max water pressure:** 1.00 / 5.50 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 08.50

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Hot & cold (integral to tails)

- **Aerator type:** Honeycomb coin slot aerator
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M8 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 365 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year