

Product Finish: Matt Black

Product code: AT2044
EAN13 barcode: 5060344158824



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product features:

Metal construction throughout

Crystal clear filtered water, easy to change, high quality carbon filter

Supplied complete with flexible tail pipes for fast simple fitting


Modern minimalism with flair

filtered water through a dedicated spout pathway

Additional information / Parts included:

Includes Aquifer Safelock filter installation pack

Product dimensions:

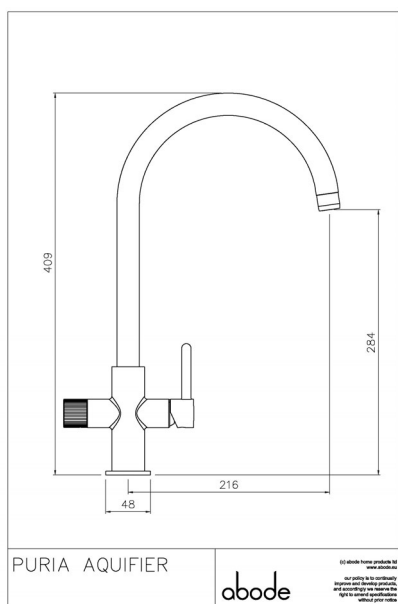

- **Overall Height / projection:** 409 mm
- **Exit reach:** 216 mm
- **Exit height:** 284 mm
- **Centre distance(s):**

- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 50 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** M22 female

Packaged properties:

Box length: 440mm

Box depth: 65mm


Box width: 340mm

Units per outer: 5

Tap only weight: 1.24kg

Boxed weight: 2.93kg

Product flow characteristics:

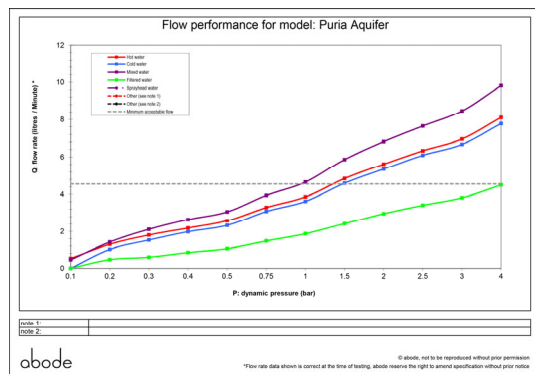

- **Min / Max water pressure:** 1.00 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 08.46

- **Control valve type:** Single lever ceramic cartridge, ceramic disc QT
- **Product flow characteristics:** (C&H / F) dual flow
- **Non return valve(s):** Integral to cold hose inlet only

- **Aerator type:** Neoperl aerator honeycomb dual flow
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw (2.5mm)

- **Tail pipe inlet / outlet size:** M8 / 1 x 1/2" BSP Male, 2 x 1/2" BSP Female

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year