

Product Finish: Stainless steel

Product code: AT2075  
EAN13 barcode: 5060344155977



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


## Product features:

- Subtle soft sweeping design form
- Quarter turn handle action for precise flow control
- 304 grade brushed stainless steel construction
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting

## Additional information / Parts included:

Includes 2.5mm Allen key, triangular stabiliser & high flow aerator

## Product dimensions:

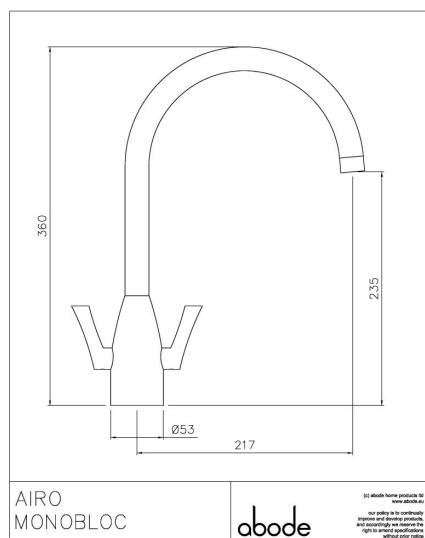

- **Overall Height / projection:** 360 mm
- **Exit reach:** 217 mm
- **Exit height:** 235 mm
- **Centre distance(s):**


- **Base diameter(s):** 53 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 45 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** 22mm

## Packaged properties:

- |                                |                             |
|--------------------------------|-----------------------------|
| <b>Box length:</b> 435mm       | <b>Box depth:</b> 70mm      |
| <b>Box width:</b> 340mm        | <b>Units per outer:</b> 5   |
| <b>Tap only weight:</b> 2.18kg | <b>Boxed weight:</b> 1.48kg |

## Product flow characteristics:

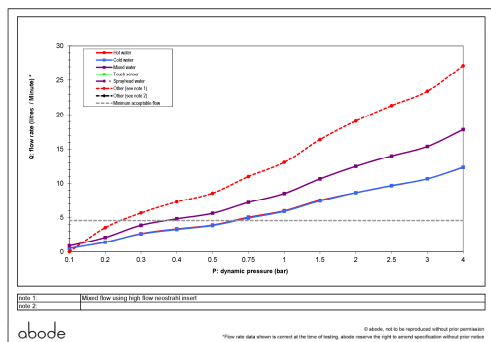

- **Min / Max water pressure:** 0.30 / 5.50 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 23.40

- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Hot & cold (integral to tails)

- **Aerator type:** Light blue honeycomb & hi-flow neostahl
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M12 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 245 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year