

Chrome

abode

note: model shown may not be displayed in the finish as described	Product code AB2814
	EAN 13 barcode 5060879996195
	Specification version 0 18/02/2025
	Finish Chrome
	Notes:

	<table> <tr> <td>Overall Product Length (mm) (typically left to right dimension of product)</td><td></td></tr> <tr> <td>Overall Product Width (mm) (typically the rear of the base plinth to the end of the spout)</td><td></td></tr> <tr> <td>Overall Product Height (mm) (typically from base of tap to top of spout)</td><td>1091</td></tr> <tr> <td>Spout Exit Height (mm) (typically from the base of the tap to the underside of the aerator)</td><td>864</td></tr> <tr> <td>Spout Exit Height (Maximum mm) (typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)</td><td></td></tr> <tr> <td>Spout Exit Reach (mm) (typically from the centreline of the tap hole to the centre of the aerator)</td><td>247</td></tr> <tr> <td>Spout Exit Reach (At Maximum mm) (typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)</td><td></td></tr> <tr> <td>Base Diameter (mm) (typically the diameter of the base plinth or the size of the wall plate)</td><td>200</td></tr> <tr> <td>Handle Back Projection (mm) (typically the distance from the centre of the taphole to the furthest point backwards of the lever when rotated)</td><td></td></tr> <tr> <td>Tap Hole or Mounting Holes Size (mm) (min. & max. mounting hole size)</td><td>65-120</td></tr> <tr> <td>Tap Hole Centre Spacing (mm) (recommended distance between tap holes)</td><td></td></tr> <tr> <td>Fixing range (mm) (min – max surface fixing depth)</td><td>80 – 120</td></tr> <tr> <td>Recommended Hole size (wall mounted products only)</td><td></td></tr> </table>	Overall Product Length (mm) (typically left to right dimension of product)		Overall Product Width (mm) (typically the rear of the base plinth to the end of the spout)		Overall Product Height (mm) (typically from base of tap to top of spout)	1091	Spout Exit Height (mm) (typically from the base of the tap to the underside of the aerator)	864	Spout Exit Height (Maximum mm) (typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)		Spout Exit Reach (mm) (typically from the centreline of the tap hole to the centre of the aerator)	247	Spout Exit Reach (At Maximum mm) (typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)		Base Diameter (mm) (typically the diameter of the base plinth or the size of the wall plate)	200	Handle Back Projection (mm) (typically the distance from the centre of the taphole to the furthest point backwards of the lever when rotated)		Tap Hole or Mounting Holes Size (mm) (min. & max. mounting hole size)	65-120	Tap Hole Centre Spacing (mm) (recommended distance between tap holes)		Fixing range (mm) (min – max surface fixing depth)	80 – 120	Recommended Hole size (wall mounted products only)	
Overall Product Length (mm) (typically left to right dimension of product)																											
Overall Product Width (mm) (typically the rear of the base plinth to the end of the spout)																											
Overall Product Height (mm) (typically from base of tap to top of spout)	1091																										
Spout Exit Height (mm) (typically from the base of the tap to the underside of the aerator)	864																										
Spout Exit Height (Maximum mm) (typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)																											
Spout Exit Reach (mm) (typically from the centreline of the tap hole to the centre of the aerator)	247																										
Spout Exit Reach (At Maximum mm) (typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)																											
Base Diameter (mm) (typically the diameter of the base plinth or the size of the wall plate)	200																										
Handle Back Projection (mm) (typically the distance from the centre of the taphole to the furthest point backwards of the lever when rotated)																											
Tap Hole or Mounting Holes Size (mm) (min. & max. mounting hole size)	65-120																										
Tap Hole Centre Spacing (mm) (recommended distance between tap holes)																											
Fixing range (mm) (min – max surface fixing depth)	80 – 120																										
Recommended Hole size (wall mounted products only)																											
LEVARTO FLOOR MOUNTED BATH SHOWER MIXER	(c) abode home products ltd www.abode.eu our policy is to continually improve and develop products, and accordingly we reserve the right to amend specifications without prior notice abode																										

- Packaging Type: Boxed
- Packaged size LxWxD: 810x330x75
- Gross weight (ea): 6.54Kg

Details of Warranty duration and Terms & Conditions for each product type can be found on our website:
abodedesigns.co.uk/support/warranty

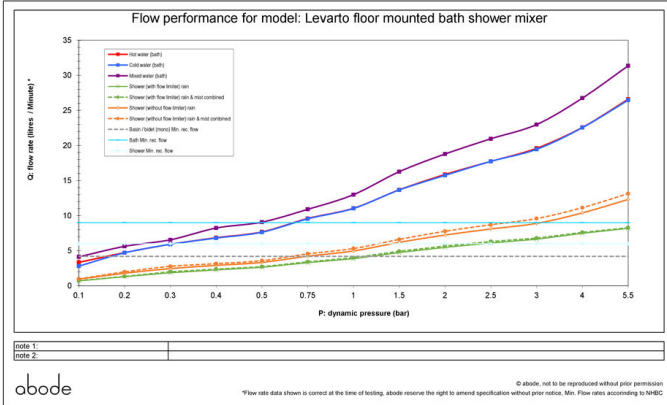
Certain products may benefit by registering the Warranty here:
abodedesigns.co.uk/support/register/warranty

- Clean the mixers and showers regularly as required, using a mild soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue.
- Avoid contact with any harsh chemical or abrasives, for more detail see supplied booklet or www.abodedesigns.co.uk

Features:

Delivers filtered water?	Delivers filtered 98°C water?	Has a spray function?	Has a Pull around (semi pro) function?	Product is flow limited?	Product is DDA compliant?	Total number of exits (shower controls only)	Total number of independent exits (shower controls only)
x	x	Yes	Yes	Yes	Yes	x	x

Flow Characteristics:

Flow performance for model: Levarto floor mounted bath shower mixer 	Min. cold water pressure (bar)	1.4
	Min. hot water pressure (bar)	1.4
	Max. water pressure (bar)	5
	Max. flow at 3 bar (l/m)	98, shower=6.8
	Bath & Shower mixer only – Min. hot/cold water pressure (Bath)	0.5
	Bath & Shower mixer only – Min. hot/cold water pressure	1.4
	General notes on pressures / flow: *Detailed minimum pressure requirements for this product: Bath 0.5, Shower 1.4 (bar)	

Flow Limiter:

Max. Design Flow limit	Flow limiter (USG/LPM)	Flow limiter Type
n/a	n/a	n/a

Spout:

Flow characteristics	Spout Rotation Range (°)	Spout End Connection (spout end threading)
single flow	0	m24 female

Connections:

Function	Type	Inlet connection	Outlet connection	Overall Length	Check valve included?	Other information
Hot Water Inlet	Flexible Braided Stainless Hose	1/2" BSP Female	M12	900		red and blue tape on 1/2" end of hose to identify hot and cold
Cold Water Inlet	Flexible Braided Stainless Hose	1/2" BSP Female	M12	900		red and blue tape on 1/2" end of hose to identify hot and cold

Filtration:

Filter Type	Filter media	Filter reorder code