

**Levarto - Floor Mounted Bath Shower Mixer**  
Matt Black

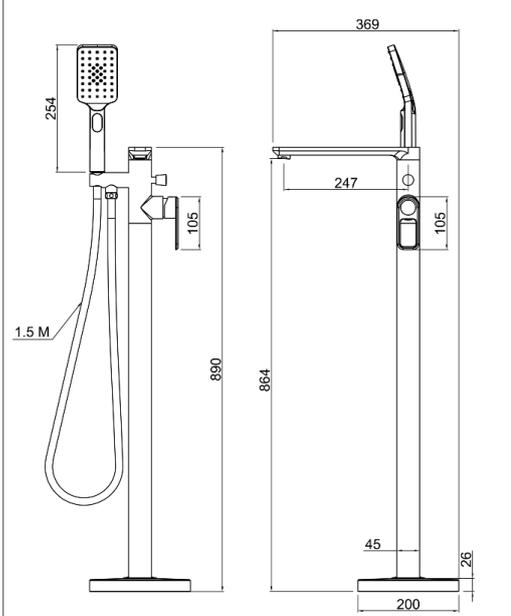
abode

**Product Basics:**

	<b>Product code</b>	AB2865
	<b>EAN 13 barcode</b>	5060879996267
	<b>Specification version</b>	0 18/02/2025
	<b>Finish</b>	Matt Black
	<b>Notes:</b>	

note: model shown may not be displayed in the finish as described

**Product drawing & dimensions:**

 <p>LEVARTO FLOOR MOUNTED BATH SHOWER MIXER</p> <p>(c) abode home products ltd www.abode.eu</p> <p>our policy is to continually improve and develop products, and accordingly we reserve the right to amend specifications without prior notice</p> <p>abode</p>	<b>Overall Product Length (mm)</b> <small>(typically left to right dimension of product)</small>	
	<b>Overall Product Width (mm)</b> <small>(typically the rear of the base plinth to the end of the spout)</small>	
	<b>Overall Product Height (mm)</b> <small>(typically from base of tap to top of spout)</small>	1091
	<b>Spout Exit Height (mm)</b> <small>(typically from the base of the tap to the underside of the aerator)</small>	864
	<b>Spout Exit Height (Maximum mm)</b> <small>(typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)</small>	
	<b>Spout Exit Reach (mm)</b> <small>(typically from the centreline of the tap hole to the centre of the aerator)</small>	247
	<b>Spout Exit Reach (At Maximum mm)</b> <small>(typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)</small>	
	<b>Base Diameter (mm)</b> <small>(typically the diameter of the base plinth or the size of the wall plate)</small>	200
	<b>Handle Back Projection (mm)</b> <small>(typically the distance from the centre of the tap hole to the furthest point backwards of the lever when rotated)</small>	
	<b>Tap Hole or Mounting Holes Size (mm)</b> <small>(min. &amp; max. mounting hole size)</small>	65-120
	<b>Tap Hole Centre Spacing (mm)</b> <small>(recommended distance between tap holes)</small>	
	<b>Fixing range (mm)</b> <small>(min - max surface fixing depth)</small>	80 -
	<b>Recommended Hole size</b> <small>(wall mounted products only)</small>	

**Packing summary:**

- Packaging Type: Boxed
- Packaged size LxWxD: 810x330x75
- Gross weight (ea): 6.54Kg

**Warranty summary:**

Details of Warranty duration and Terms & Conditions for each product type can be found on our website:  
[abodedesigns.co.uk/support/warranty](http://abodedesigns.co.uk/support/warranty)

Certain products may benefit by registering the Warranty here:  
[abodedesigns.co.uk/support/register/warranty](http://abodedesigns.co.uk/support/register/warranty)

**Care summary:**

- Clean the mixers and showers regularly as required, using a mild soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue.
- Avoid contact with any harsh chemical or abrasives, for more detail see supplied booklet or [www.abodedesigns.co.uk](http://www.abodedesigns.co.uk)

### Features:

Delivers filtered water?	Delivers filtered 98°C water?	Has a spray function?	Has a Pull around (semi pro) function?	Product is flow limited?	Product is DDA compliant?	Total number of exits (shower controls only)	Total number of independent exits (shower controls only)
X	X	Yes	Yes	Yes	Yes	X	X

### Flow Characteristics:

<p>Flow performance for model: Levarto floor mounted bath shower mixer</p> <p>Q: flow rate (litres / minute)</p> <p>P: dynamic pressure (bar)</p> <p>mode 1: mode 2:</p> <p>© abode. Not to be reproduced without prior permission. *Flow rate data shown is correct at the time of testing, abode reserves the right to amend specification without prior notice. Min. Flow rates according to NSF6C</p>	<b>Min. cold water pressure (bar)</b>	1.4
	<b>Min. hot water pressure (bar)</b>	1.4
	<b>Max. water pressure (bar)</b>	5
	<b>Max. flow at 3 bar (l/m)</b>	98, shower=6.8
	<b>Bath &amp; Shower mixer only - Min. hot/cold water pressure (Bath) Bath &amp; Shower mixer only - Min. hot/cold water pressure</b>	0.5
	<b>General notes on pressures / flow:</b>	

\*Detailed minimum pressure requirements for this product: Bath 0.5, Shower 1.4 (bar)

### Flow Limiter:

Max. Design Flow limit	Flow limiter (USG/LPM)	Flow limiter Type
n/a	n/a	n/a

### Spout:

Flow characteristics	Spout Rotation Range (°)	Spout End Connection (spout end threading)
single flow	0	m24 female

### Connections:

Function	Type	Inlet connection	Outlet connection	Overall Length	Check valve included?	Other information
Hot Water Inlet	Flexible Braided Stainless Hose	1/2" BSP Female	M12	900		red and blue tape on 1/2" end of hose to identify hot and cold
Cold Water Inlet	Flexible Braided Stainless Hose	1/2" BSP Female	M12	900		red and blue tape on 1/2" end of hose to identify hot and cold

### Filtration:

Filter Type	Filter media	Filter reorder code