

Product Finish: Stainless steel

Product code: AT1070
EAN13 barcode: 5060048380699



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- 304 grade brushed stainless steel construction
- Single lever control for effortless single handed control
- Solid and functional European architect design styling
- Supplied complete with flexible tail pipes for fast simple fitting
- Antisplash spout supplied as standard

Additional information / Parts included:

Includes optional high flow aerator

Product dimensions:

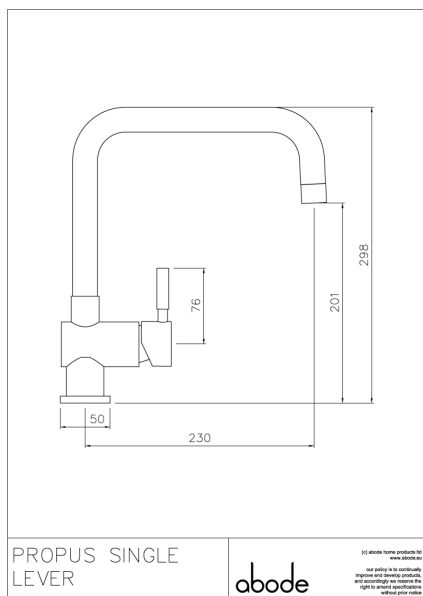

- **Overall Height / projection:** 298 mm
- **Exit reach:** 230 mm
- **Exit height:** 201 mm
- **Centre distance(s):**


- **Base diameter(s):** 50 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 65 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** 22f

Packaged properties:

Box length: 345mm **Box depth:** 60mm
Box width: 295mm **Units per outer:** 5
Tap only weight: 1.31kg **Boxed weight:** tbc/kg

Product flow characteristics:

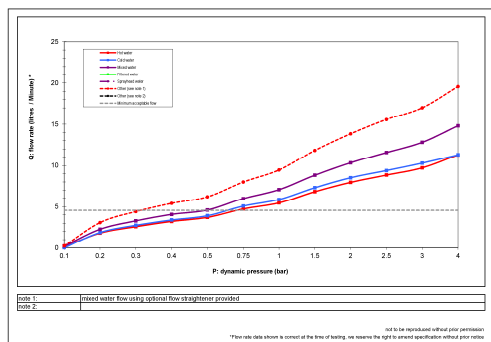

- **Min / Max water pressure:** 0.30 / 5.50 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 17.01

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Integral to hot & cold inlets

- **Aerator type:** Light blue honeycomb & hi-flow neostrahl
- **Accepts revolve / spray areator:** Yes
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 305 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year