

Product Finish: Brushed nickel

Product code: AT1181
EAN13 barcode: 5060048382723



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Minimalist planate design form
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting

Additional information / Parts included:

Includes 2.5mm Allen key, self adhesive sink seal & triangular stabiliser

Product dimensions:

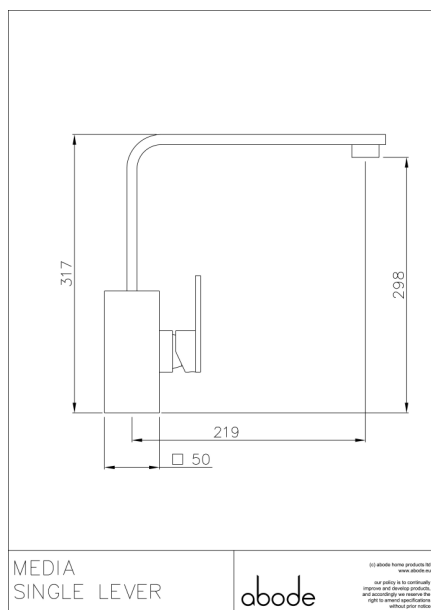

- **Overall Height / projection:** 317 mm
- **Exit reach:** 219 mm
- **Exit height:** 298 mm
- **Centre distance(s):**


- **Base diameter(s):** 50 x 50mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 70 mm

- **Spout diameter:** 30 x 10 mm
- **Spout aerator size:** 24m

Packaged properties:

Box length: 430mm **Box depth:** 70mm
Box width: 340mm **Units per outer:** 5
Tap only weight: 2.40kg **Boxed weight:** 3.16kg

Product flow characteristics:

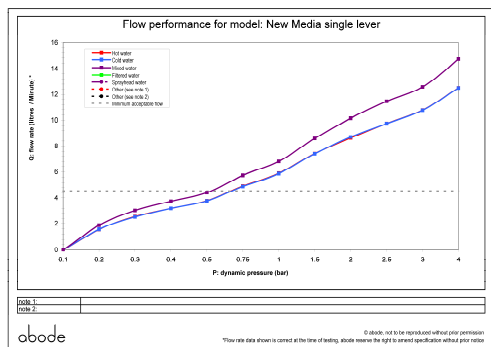

- **Min / Max water pressure:** 0.50 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 12.58

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Hot & cold (integral to tails)

- **Aerator type:** Plastic mesh diffuser
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M12 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 245 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year