



Fitting type: Undermount or Inset

Sink handing: Reversible

Finish style: White Granite

- **Min. base unit (mm):** 600 (inset) 1000 (undermount)
- **Packaged size L x W x D:** 1026 x 586 x 262mm
- **Supplied boxed or sleeved:** Boxed
- **Boxed weight:** 18.06 kg
- **Sink only weight:** 13.20 kg

- Durable matt finish granite composite construction throughout
- Large capacity drainer area
- Softened square edges for a sharp but easy clean look
- Model can be undermounted or inset fitted
- Stainless steel wastes and pipework included

Included parts:



1 x AX1002 (m)
90mm (1.5") Orbit manual basket
strainer waste - long bolt



1 x AX1104 (m)
Rectangular overflow (55x30mm
horizontal)



1 x AX1008 (m)
1.0 Bowl pipework



1 x AX4049 (m)
Synchronist composite inset &
undermount instruction



1 x AX1032
Composite inset fixing clips x 6



1 x AX1170 (m)
6 x Undermount clip, 6 x 17mm long
x Ø10.64 soft thread tapex & 6 x
30mm domehead screw

Recommended accessories:



1 x AX2506
System Drainer / Trivet (roll up)



1 x AX1508
System Colander



1 x AX2024
System Bamboo Chopping Board

All accessories can be
purchased directly from
www.abode-shop.co.uk
or phone 01226 283434

Materials & workmanship warranty summary:


- Sink materials & workmanship 10 years.
- Waste kits 1 year.
- Connecting pipework 1 year.

Care instructions summary:

- Clean the products regularly using soapy water and a non-abrasive cloth, regular cleaning will prevent the build-up of lime scale and dirt.
- Avoid contact with corrosive or abrasive substances.
- After cleaning rinse thoroughly with clean water then dry.
- For more detail see supplied booklet or www.abodedesigns.co.uk



Section A-A

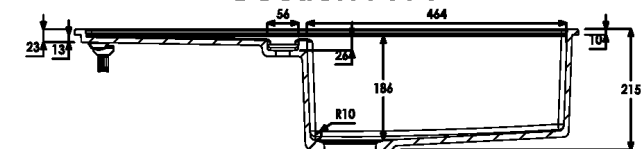

A cross-sectional diagram of a bolted joint. A bolt is inserted through a hole in a hatched block. A sleeve with internal threads is placed over the bolt, and a nut is threaded onto the end of the bolt. The sleeve has a wider section at one end, likely for a washer or to provide a larger bearing surface.

[illegible]

General:

U/M Cut out

All details are provided in good faith and within tolerance of the manufacture process.

We recommend that a cut out is made in timber and checked against the actual sink that has been supplied before cutting the work surface.

Abode cannot accept liability for problems or cost incurred by failure to follow this advice.

All dimensions, weights and measures are subject to change without prior notice. Errors and omissions accepted.

BOWL(S), OVERFLOW, TAP AREA.

Inset Cut out

Technical drawing showing the front and side views of the BOWL(S), OVERFLOW, TAP AREA. The front view shows a rectangular unit with a width of 884 and a height of 400. A dashed line indicates an inset cutout with a width of 559 and a height of 21. The side view shows a depth of 442 and a height of 400. A dashed line indicates a cutout with a width of 400 and a height of 21. The drawing includes a note about U/M Cut out and a disclaimer.

CAD cutout files can be
downloaded from
www.abodedesigns.co.uk

Dishwasher under drainer? Distance from top of worktop to underside of the drainer 10 mm

Bowl 3 apx. volume (litres): N/A