


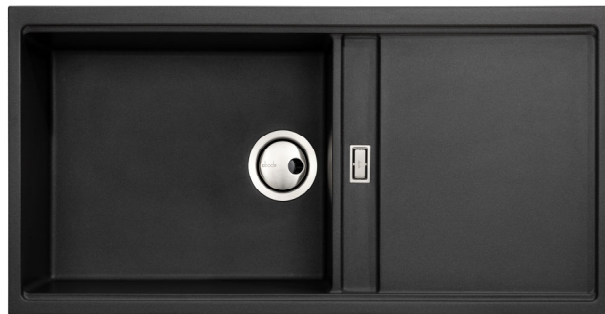

Fitting type: Undermount or Inset

Sink handing: Reversible

Finish style: Black Metallic Granite

- **Min. base unit (mm):** 600 (inset) 1000 (undermount)
- **Packaged size L x W x D:** 1026 x 586 x 262mm
- **Supplied boxed or sleeved:** Boxed
- **Boxed weight:** 18.06 kg
- **Sink only weight:** 13.20 kg

- Durable matt finish granite composite construction throughout
- Large capacity drainer area
- Softened square edges for a sharp but easy clean look
- Model can be undermounted or inset fitted
- Stainless steel wastes and pipework included

Included parts:



1 x AX1002 (m)
90mm (1.5") Orbit manual basket
strainer waste - long bolt



1 x AX1104 (m)
Rectangular overflow (55x30mm
horizontal)



1 x AX1008 (m)
1.0 Bowl pipework



1 x AX4049 (m)
Synchronist composite inset &
undermount instruction



1 x AX1032
Composite inset fixing clips x 6



1 x AX1170 (m)
6 x Undermount clip, 6 x 17mm long
x Ø10.64 soft thread tapex & 6 x
30mm domehead screw

Recommended accessories:



1 x AX2506
System Drainer / Trivet (roll up)



1 x AX1508
System Colander



1 x AX2024
System Bamboo Chopping Board

All accessories can be purchased directly from www.abode-shop.co.uk or phone 01226 283434

Materials & workmanship warranty summary:


- Sink materials & workmanship 10 years.
- Waste kits 1 year.
- Connecting pipework 1 year.

Care instructions summary:

- Clean the products regularly using soapy water and a non-abrasive cloth, regular cleaning will prevent the build-up of lime scale and dirt.
- Avoid contact with corrosive or abrasive substances.
- After cleaning rinse thoroughly with clean water then dry.
- For more detail see supplied booklet or www.abodedesigns.co.uk



Section A-A

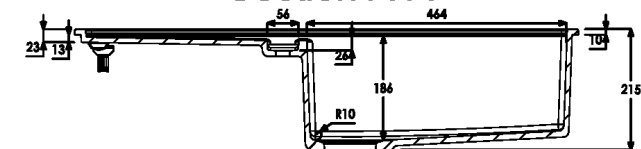

A technical cross-section diagram of a bolted joint. A bolt is shown passing through a plate with diagonal hatching. A split pin (cotter pin) is inserted through the bolt's end and the plate, with its ends bent into loops to secure the assembly. A thick black curved arrow on the right indicates the direction of a force or movement.

Technical drawing of the front view of a rectangular safe. The drawing includes the following dimensions in mm:

- Overall width: 900
- Overall height: 460
- Internal width (excluding handle): 845
- Internal height (excluding handle): 383
- Distance from top edge to handle center: 230
- Distance from top edge to lock center: 39
- Distance from top edge to bottom edge: 28
- Distance from right edge to lock center: 20
- Distance from left edge to handle center: 57
- Distance from left edge to lock center: 382
- Distance from left edge to handle center: 50
- Distance from left edge to lock center: 120
- Lock diameter: Ø90

Technical drawing of a U/M Cut out. The drawing shows a rectangular component with a circular feature on the right side. Dimensions are indicated: 865 at the top, 409 on the left, and R12 at the bottom right. The text 'U/M Cut out' is centered. Below the drawing, there are three paragraphs of text providing details and instructions.

U/M Cut out

All details are provided in good faith and within tolerances of the manufacturer's process.

We recommend that a cut out is made in timber and checked against the actual sink, but has been supplied before cutting the work surface.

Abode cannot accept liability for problems or cost incurred by failure to follow this advice.

All dimensions, weights and measures are subject to change without prior notice. Errors and omissions accepted.

Technical drawing of the front view of a bowl. The drawing shows a rectangular shape with a dashed line indicating an "Inset Cut out". The overall width is 884 and the overall height is 442. The inset cut out has a width of 559 and a height of 400. The top-left corner is rounded with a radius of R10. The bottom edge has a dimension of 214. The text "BOWL(S), OVERFLOW, TAP AREA." is centered within the dashed line area.

Bowl 3 apx. volume (litres): N/A

CE UK
CA

Product code:
AW3187