



Product features:

- Metal construction throughout
- Custom designed for lower range pressures
- Quarter turn handle action for precise flow control
- Fixed spout to prevent accidental water damage
- Minimalist planate design form


Packaged properties:

Box length (mm): 410 Box depth(mm): 110
Box width(mm): 280 Boxed weight (Kg): 2.8

Includes pop up waste?: No

Additional comments:


Product dimensions:

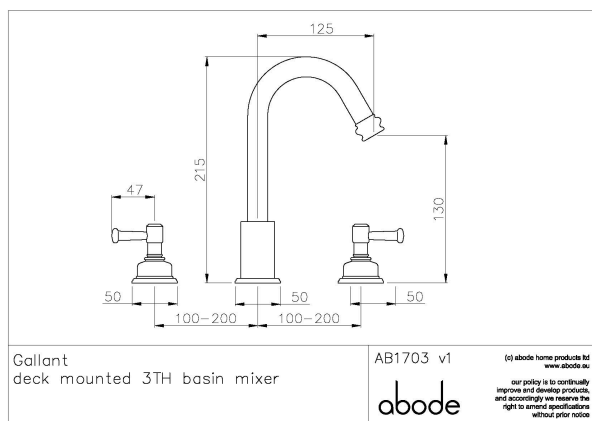

- Product mounted where: Surface
- Recommended hole size: 27-44, 25-44, 27-44 mm
- Overall Height / projection: 215 mm
- Exit reach: 125 mm
- Exit height: 130 mm
- Base size: 50 mm
- Inlet centre distance(s): 100-200 mm

- Min. fitting depth required: 0 mm
- Max. surface depth: 50 mm

Product flow characteristics:

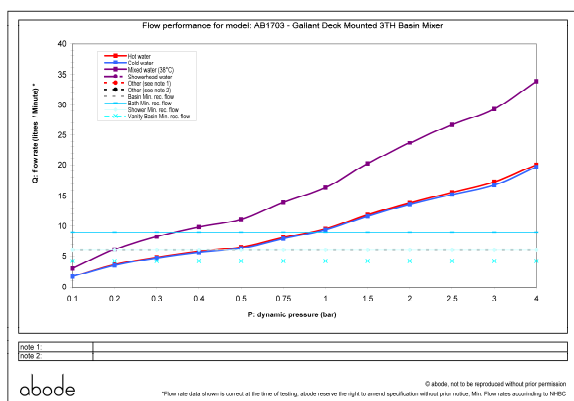

- Min / Max water pressure (bar): 0.20* / 5.50
- Part G max. mixed flow rate at 3 bar (l/m): 29.35
- Inlet connection type / length: Flexi / 310 mm
- Inlet (plumbing connection) / outlet size: 1/2" F / 1/2" F
- Product flow characteristics: Single flow
- Non return valve(s) supplied or position: no
- Aerator type: Neoperl honeycomb, laminar, white screen
- Control valve type: 1/2" QT CD (8-20)
- Includes output diverter?: N/A
- Inlet meshed particle filters included: n/a
- Shower hose type / length: N/a / n/a

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives