

Product Finish: Brushed Nickel

Product code: AT2224  
EAN13 barcode: 5060879994485



**Product features:**


- Victorian inspired aesthetic
- Quarter turn handle action for precise flow control
- Ceramic handle(s) as standard
- Flow Limited to 5 Litres per Minute for Part G compliance
- Supplied with adjustable centre inlets

**Additional information / Parts included:**

Includes additional Honeycomb 1.5gpm, Solid metal handle addition

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

**Product dimensions:**

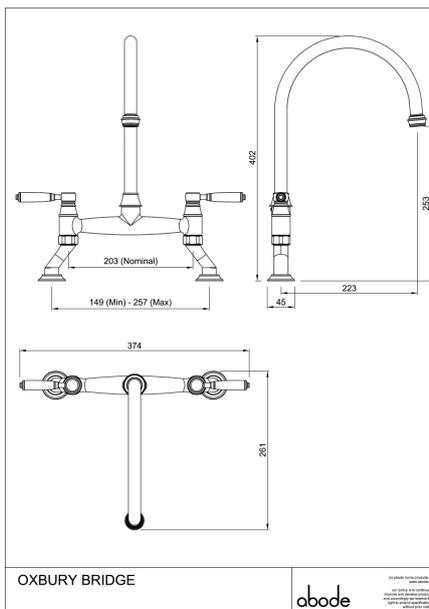

- Overall, Height / projection:** 402 mm
- Exit reach:** 223 mm
- Exit height:** 253 mm
- Centre distance(s):** 149-257 (203 centres) mm


- Base diameter(s):** 45 mm
- Recommended hole diameter:** Ø 35 mm
- Max. surface depth:** 50 mm

- Spout diameter:** 20 mm
- Spout aerator size:** M22 x 1

**Packaged properties:**

- Box length:** 575mm
- Box depth:** 80mm
- Box width:** 350mm
- Units per outer:** 5
- Tap only weight:** 1.98kg
- Boxed weight:** 2.88kg

**Product flow characteristics:**

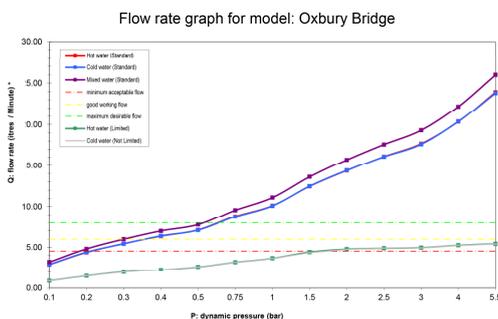

- Min / Max water pressure:** 0.20 / 5 bar
- Recommended / Max water temperature:** 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min):** 19.31

- Control valve type:** Ceramic disc QT
- Product flow characteristics:** Single flow
- Non return valve(s):** None

- Aerator type:** Honeycomb Aerator
- Accepts revolve / spray areator:** No
- Spout connection method:** Grub screw

- Tail pipe inlet / outlet size:** N/A / 1/2" BSP Male
- Inlet pipe type / length:** Fixed threaded inlets / 120 mm

**Care instructions summary:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

**Warranty Summary** (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year