

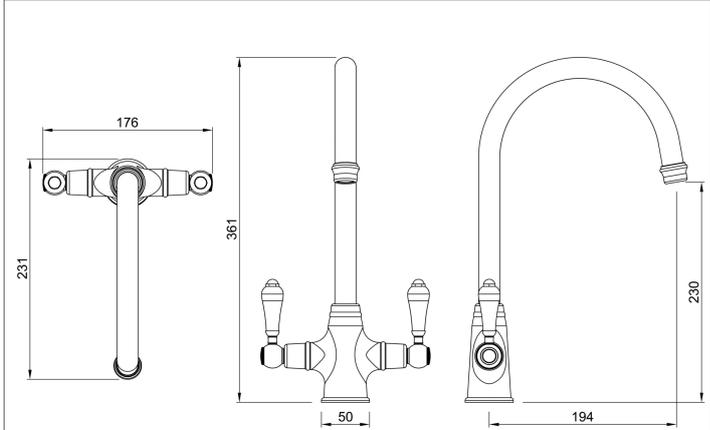
**Ludlow - Monobloc**  
Brushed Nickel

abode

**Product Basics:**

|  |                              |                 |
|--|------------------------------|-----------------|
|  <p>note: model shown may not be displayed in the finish as described</p> | <b>Product code</b>          | AT1216          |
|  | <b>EAN 13 barcode</b>        | 5060048383867   |
|  | <b>Specification version</b> | 0<br>20/03/2002 |
|  | <b>Finish</b>                | Brushed Nickel  |
|  | <b>Notes:</b>                |                 |

**Product drawing & dimensions:**

|   |  |  |
|---|--|--|
|  <p>LUDLOW MONOBLOC</p> <p>abode</p> | <b>Overall Product Length (mm)</b><br><small>(typically left to right dimension of product)</small>  | 176  |
|   | <b>Overall Product Width (mm)</b><br><small>(typically the rear of the base plinth to the end of the spout)</small>  | 229  |
|   | <b>Overall Product Height (mm)</b><br><small>(typically from base of tap to top of spout)</small>  | 355  |
|   | <b>Spout Exit Height (mm)</b><br><small>(typically from the base of the tap to the underside of the aerator)</small>   | 225  |
|   | <b>Spout Exit Height (Maximum mm)</b><br><small>(typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)</small>           |  |
|   | <b>Spout Exit Reach (mm)</b><br><small>(typically from the centreline of the tap hole to the centre of the aerator)</small>  | 190  |
|   | <b>Spout Exit Reach (At Maximum mm)</b><br><small>(typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)</small> |  |
|   | <b>Base Diameter (mm)</b><br><small>(typically the diameter of the base plinth or the size of the wall plate)</small>  | 49   |
|   | <b>Handle Back Projection (mm)</b><br><small>(typically the distance from the centre of the tap hole to the furthest point backwards of the lever when rotated)</small>            |  |
|   | <b>Tap Hole or Mounting Holes Size (mm)</b>  | 35mm diameter<br><small>(min. &amp; max. mounting hole size)</small> |
|   | <b>Tap Hole Centre Spacing (mm)</b><br><small>(recommended distance between tap holes)</small>   |  |
|   | <b>Fixing range (mm)</b><br><small>(min - max surface fixing depth)</small>  | 0 - 50   |
|   | <b>Recommended Hole size</b><br><small>(wall mounted products only)</small>  |  |

**Packing summary:**

|   |
|---|
| <ul style="list-style-type: none"> <li>· Packaging Type: Boxed</li> <li>· Packaged size LxWxD: 420x240x75</li> <li>· Gross weight (ea): 1.98Kg</li> </ul> |
|---|

**Warranty summary:**

|   |
|---|
| <p>Details of Warranty duration and Terms &amp; Conditions for each product type can be found on our website:<br/><a href="http://abodedesigns.co.uk/support/warranty">abodedesigns.co.uk/support/warranty</a></p> <p>Certain products may benefit by registering the Warranty here:<br/><a href="http://abodedesigns.co.uk/support/register/warranty">abodedesigns.co.uk/support/register/warranty</a></p> |
|---|

**Care summary:**

|  |
|--|
| <ul style="list-style-type: none"> <li>· Clean the mixers and showers regularly as required, using a mild soap, do not use any other cleaners.</li> <li>· Regular cleaning will prevent the build-up of lime scale and dirt.</li> <li>· After cleaning rinse thoroughly with clean water to remove any cleaner residue.</li> <li>· Avoid contact with any harsh chemical or abrasives, for more detail see supplied booklet or <a href="http://www.abodedesigns.co.uk">www.abodedesigns.co.uk</a></li> </ul> |
|--|

### Features:

|                          |                               |                       |  |                          |                           |  |  |
|--------------------------|-------------------------------|-----------------------|--|--------------------------|---------------------------|--|--|
| Delivers filtered water? | Delivers filtered 98°C water? | Has a spray function? | Has a Pull around (semi pro) function? | Product is flow limited? | Product is DDA compliant? | Total number of exits (shower controls only) | Total number of independent exits (shower controls only) |
| X                        | X                             | X                     | X                                      | X                        | Yes                       | X  | X  |

### Flow characteristics:

|  |                                    |       |
|--|------------------------------------|-------|
| <p>Flow performance for model: Ludlow monobloc</p> <p>note 1:<br/>note 2:</p> <p>abode</p> <p><small>© abode, not to be reproduced without prior permission<br/>*Flow rate data shown is correct at the time of testing, abode reserve the right to amend specification without prior notice</small></p> | Min. cold water pressure (bar)     | 0.3   |
|  | Min. hot water pressure (bar)      | 0.3   |
|  | Max. water pressure (bar)          | 5.5   |
|  | Max. flow at 3 bar (l/m)           | 17.17 |
|  | General notes on pressures / flow: |       |

### Flow Limiter:

|                        |                        |                   |
|------------------------|------------------------|-------------------|
| Max. Design Flow limit | Flow limiter (USG/LPM) | Flow limiter Type |
| n/a                    | n/a                    | n/a               |

### Spout:

|                      |                          |  |
|----------------------|--------------------------|--|
| Flow characteristics | Spout Rotation Range (°) | Spout End Connection (spout end threading) |
| dual flow            | 360                      | m22 male                                   |

### Connections:

| Function         | Type                            | Inlet connection | Outlet connection | Overall Length | Check valve included? | Other information |
|------------------|---------------------------------|------------------|-------------------|----------------|-----------------------|-------------------|
| Hot Water Inlet  | Flexible Stainless Braided Hose | 1/2" BSP Female  | M12               | 250            |                       |                   |
| Cold Water Inlet | Flexible Stainless Braided Hose | 1/2" BSP Female  | M12               | 250            |                       |                   |

### Filtration:

|             |              |                     |
|-------------|--------------|---------------------|
| Filter Type | Filter media | Filter reorder code |
|             |              |                     |