



## Product features:

- Metal & ABS construction
- Single lever control for effortless single handed control
- Leading design features requiring high pressure
- Fixed spout to prevent accidental water damage
- Non-adjustable exit height

## Packaged properties:


Box length (mm): 1280      Box depth(mm): 235  
Box width(mm): 570      Boxed weight (Kg): 14.1

Includes pop up waste?: No

## Additional comments:


Includes mesh filter, 2.5mm allen key. ABS showerhead

## Product dimensions:

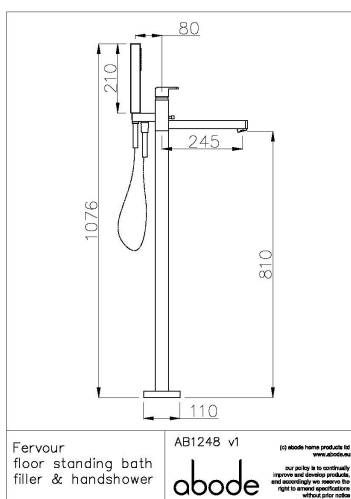

- Product mounted where: Floor
- Recommended hole size: 1076 mm
- Overall Height / projection: 245 mm
- Exit reach: 810 mm
- Exit height: 110 mm
- Base size:
- Inlet centre distance(s):
- Min. fitting depth required: 60 mm
- Max. surface depth:

## Product flow characteristics:

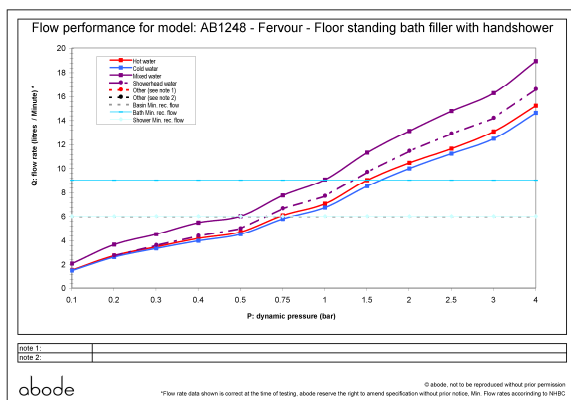

- Min / Max water pressure (bar): 1.00\* / 5.00  
\*Detailed minimum pressure requirements for this product: Bath 1, Shower 0.75 (bar)
- Part G max. mixed flow rate at 3 bar (l/m): bath=16.25, shower=14.2
- Inlet connection type / length: / mm
- Inlet (plumbing connection) / outlet size: 1/2" F /
- Product flow characteristics: Single flow  
Non return valve(s) supplied or position: sprayhead exit
- Aerator type: Honeycomb
- Control valve type: Single lever ( )
- Includes output diverter?: Yes
- Inlet meshed particle filters included: 0.60 mm
- Shower hose type / length: Smoothflex / 1.50 m

## Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

## Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives