

Syndeo Plug & Play Micro Horizontal Bend LED Flex

24V - 3mm x 6mm - Horizontal Bend - IP54

tagra®

SKU: PPS24-306



Key Features

- Available in 2300K, 2700K & 3000K
- Cut Anywhere
- Horizontal Bend
- 500mm Syndeo Cable
- Up to 273 Lumens per metre
- >90 CRI
- Silicone
- Indoor use only
- Available in 5M reels
- 5 Year Warranty

Electrical Data

Voltage	Max. Current	Typ. Current	Current 5M	Max. Power	Typ. Power	Power 5M
24V	0.41A/m	0.375A/m	1.875A	9.9W/m	9.0W/m	45W


Photometric Data

Colour Temperature	CCT/Wavelength	Lumens/m	LED Chip	LEDs/m	LEDs/unit
Very Warm White	2300K	202lm	2216	240 LEDs	-
Very Warm White	2700K	253lm	Cut Points	CRI	Beam Angle
Warm White	3000K	273lm	-	>90	120°
			SDCM	Dimmable	IC Type
			<3	Yes	
			Pixels/m	Pixels/unit	PWM Rate

Mechanical Data

Min. Bend Diameter	Bend Direction	Cable Length	Cable End	Cable Type	Wire Colours
30mm	Horizontal	500mm	Double	20 AWG	WHITE V+ DC
IP Rating	IK Rating	Material	Operating Temperature		
IP54	-	Silicone	-20°C ~ 45°C		
Lifespan	Energy Rating	Warranty	Dimensions		
50,000 Hours	-	5 Years	W3mm x H6mm		
					WHITE DASHED V- DC

Dimensions

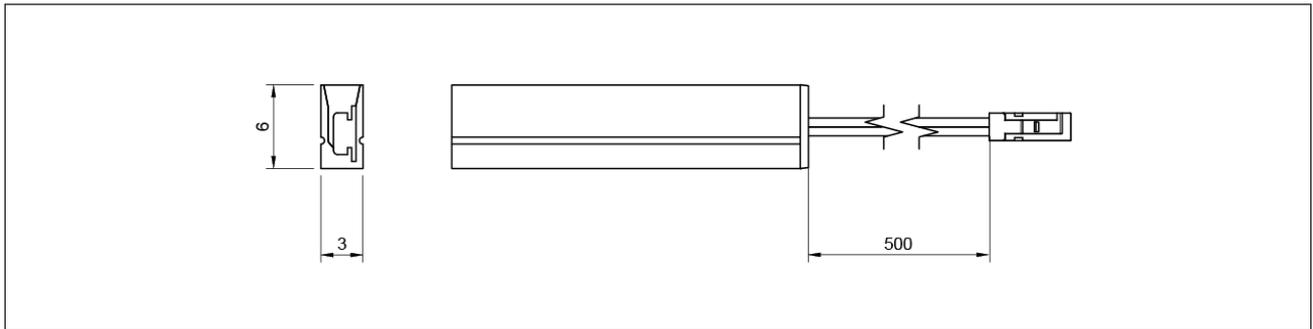

Available SKUs

SKU	CCT	IP Rating	Length
PPS24-23K3065M	2300K	IP54	5000mm
PPS24-27K3065M	2700K	IP54	5000mm
PPS24-3K3065M	3000K	IP54	5000mm

Available Accessories

Type	SKU	Colour/Material	Note
End Cap	NEONTOP306-ENDCAPS-TOP	Silicone	Pack of 8, 4 Pairs
Mounting Track	NEONTOP306-ALUCHAN1MB	Aluminium	1000mm Length