

## Precautions

### Installation Notes

- ▶ Install in accordance with the IEE wiring regulations and building regulations.
- ▶ This product must be installed by a suitably competent person.
- ▶ Keep away from children. Not a toy.
- ▶ Contains small parts. Possible choking and suffocation risk.

### IMPORTANT

- ▶ Please read these instructions before commencing any work.
- ▶ Please retain these instructions for future reference.
- ▶ Please refer to product listing for detailed information.
- ▶ Remove all packaging before connecting to power supply.

### Electrical

- ▶ When installing the battery, check the polarity is correct.
- ▶ Do not modify wiring.
- ▶ Do not use this product if there is any visible damage.
- ▶ Ensure the product is in good working condition. If there is visible damage do not use.
- ▶ Maintain connections are clean and free of debris.

### Mechanical

- ▶ Do not use the product if damaged.
- ▶ This remote only controls specified Syndeo products; not all Syndeo products can work with this remote.
- ▶ Handle with care. Take care not to dislodge any components during installation.
- ▶ The product should be mounted only using the recommended accessories.

### Environmental

- ▶ The product should only be used in an environment with an ambient temperature between -10°C to +40°C.
- ▶ The product should only be stored in an environment with a temperature between -20°C to +70°C.
- ▶ IP20 products are not waterproof and can only be installed indoors and with humidity of no more than 55%.
- ▶ Only install in a location free from chemicals, gases and flammable materials.
- ▶ For indoor and dry location use only.

### Product Warranty

1. A warranty period is provided for products in normal use. For any faults arising during the period that are confirmed to be quality related by inspection by the company, a product of the same specification will be replaced for free.
2. The warranty does not cover any of the following:
  - ( 1 ) Any product damage due to usage not allowed in the instructions.
  - ( 2 ) Any product damage due to disassembling or wrong operation by the user.
  - ( 3 ) Severe appearance damage or deformation of the product.

## Plug & Play 24V LED Remotes


### ▶ CCT & RGB+CCT Remote Control

## User Manual

**SYNDEO**  
by tagra®



Product Diagram

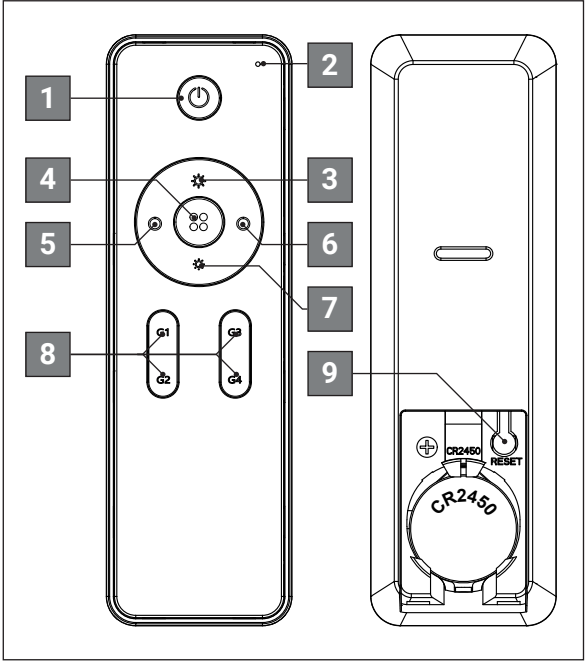

- 1. Turn ON/OFF**  
Press to turn on and off.
- 2. Indicator Light**
- 3. Brightness + (White)**  
Press and hold. Increase white light brightness.
- 4. Colour Change**  
Short press to cycle through colours
- 5. Colour Temperature - (White)**  
Press and hold. Decrease white colour temperature.
- 6. Colour Temperature + (White)**  
Press and hold. Increase white colour temperature.
- 7. Brightness - (White)**  
Press and hold. Decrease white light brightness.
- 8. Scene Modes**  
G1-RED, G2-GREEN, G3-BLUE, G4-WHITE.
- 9. Reset Button**  
Press to pair to module.

Pairing Remote

One Sensor - Control All Lights

1

Connect LED lights into the ports on the module.

2

Press the "MODE" button on the module once.

3

Within 20 seconds, quick press the "RESET" button on the back of the remote.

4

The LED lights will flash 3 times to indicate successful pairing.

Unpairing Remote

Unpair All Remotes

1

On the module, press and hold the "MODE" button for 5 seconds.

2

The LED lights will flash 3 times to indicate successful un-pairing.

Unpair Individual Remotes

1

On the remote, press and hold the "RESET" button for 5 seconds.

2

The LED lights will flash 3 times to indicate successful un-pairing.

Function

Module							G1	G2	G3	G4
CCT	✓	✗	✓	✓	✓	✓				✗
RGB+CCT	✓	✓	✓	✓	✓	✓				✓

These buttons only work with CCT and RGB+CCT modules. They control the brightness of the white light. They do not control the brightness of the RGB light.

These buttons only work with CCT and RGB+CCT modules. They control the colour temperature of the white light. They do not control the colour temperature of the RGB light.