


Pro Low Voltage LED Cable

6 Cores - Max. 11 Amps - PVC - 0.5mm²

tagra®

SKU: TC6C.5

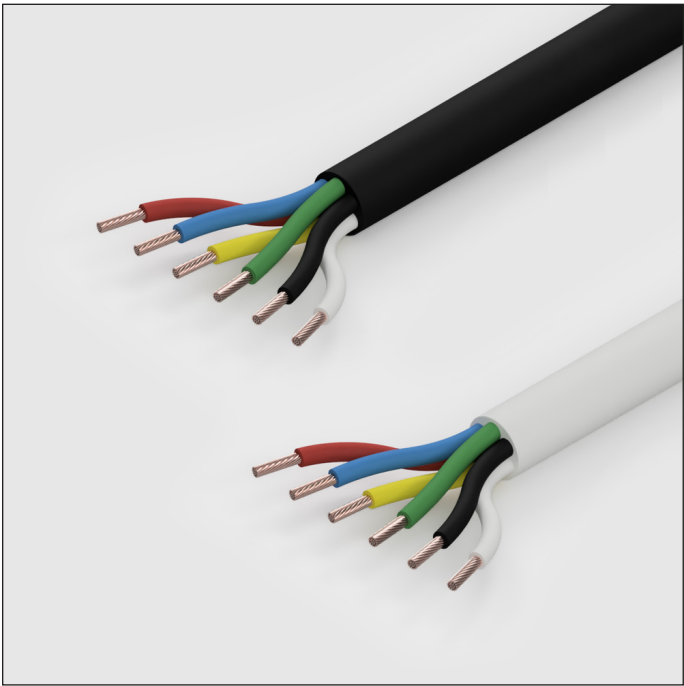

11A
Max.
Per Core

6
Core

PVC

RGB

Key Features

- ▶ 11A Current Capacity


▶ 60V Voltage Rating

▶ Made in the UK
- ▶ Black or White, PVC

▶ 10M, 50M & 100M

▶ 0.5mm² Conductor

Dimensions

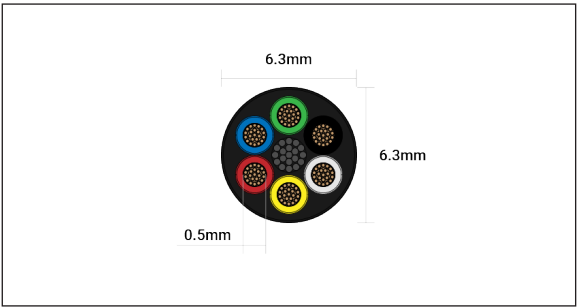

Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions	Wire Colours	
6x (16/0.20mm)	0.5mm ²	11.0A per core	Ø6.3mm	Black	V+
Manufacture Standards		Conductor	Cable Sheath	Red	R-
ISO 6722-1:2011 (Class B)		Bare Copper BS EN 60228:2005	PVC	Green	G-
Voltage Rating	Operating Temp	Flame Propagation	Min. Bend Radius	Blue	B-
Max. 60V	-40°C ~ +105°C	ISO 6722-1:2011	30mm	White	W-
Chemical Resistance to:		BS Softness	Shore A Hardness	Yellow	WW-
Acids, alkalis, alcohols, oils, saltwater		60-65	64-66		

Available SKUs

SKU	Colour	Dimensions	Length
TC6CR0.5BLK-10M	Black	Ø6.3mm	10000mm
TC6CR0.5BLK-50M	Black	Ø6.3mm	50000mm
TC6CR0.5BLK-100M	Black	Ø6.3mm	100000mm
TC6CR0.5WHT-10M	White	Ø6.3mm	10000mm
TC6CR0.5WHT-50M	White	Ø6.3mm	50000mm
TC6CR0.5WHT-100M	White	Ø6.3mm	100000mm