


Pro Low Voltage LED Cable

2 Cores - Max. 7 Amps - PVC - 0.35mm²

tagra®

SKU: TC2C.35

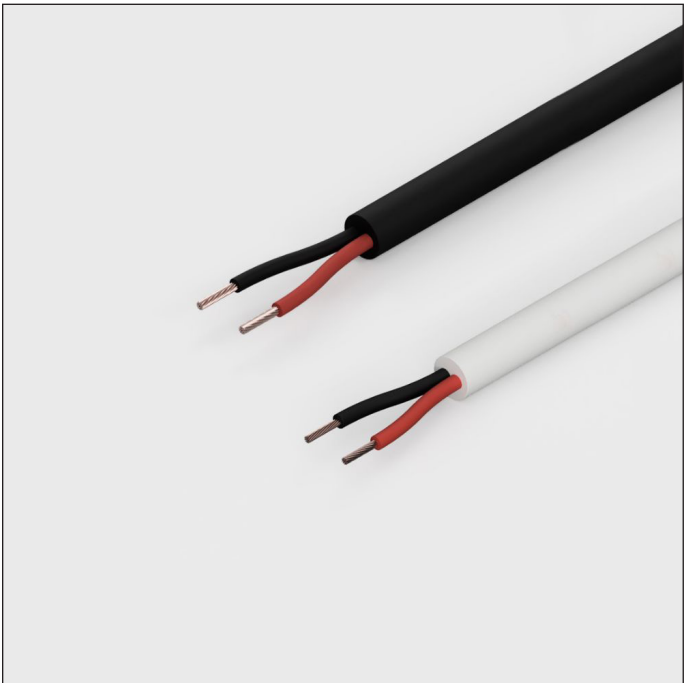

7A
Max.
Per Core

2
Core

PVC

SC

Key Features

- ▶ 7A Current Capacity


▶ 60V Voltage Rating

▶ Made in the UK
- ▶ Black or White, PVC

▶ 10M, 50M & 100M

▶ 0.35mm² Conductor

Dimensions

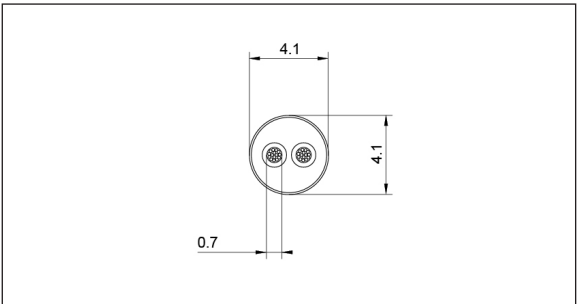

Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions	Wire Colours	
2x (12/0.20mm)	0.35mm ²	7.0A per core	Ø4.1mm	Red	V+
Manufacture Standards	Conductor	Cable Sheath			
ISO 6722-1:2011 (Class B)	Bare Copper BS EN 60228:2005	PVC			
Voltage Rating	Operating Temp	Flame Propagation	Min. Bend Radius	Black	V-
Max. 60V	-40°C ~ +105°C	ISO 6722-1:2011	30mm		
Chemical Resistance to:		BS Softness	Shore A Hardness		
Acids, alkalis, alcohols, oils, saltwater		60-65	64-66		

Available SKUs

SKU	Colour	Dimensions	Length
TC2CR0.35BLK-10M	Black	Ø4.1mm	10000mm
TC2CR0.35BLK-50M	Black	Ø4.1mm	50000mm
TC2CR0.35BLK-100M	Black	Ø4.1mm	100000mm
TC2CR0.35WHT-10M	White	Ø4.1mm	10000mm
TC2CR0.35WHT-50M	White	Ø4.1mm	50000mm
TC2CR0.35WHT-100M	White	Ø4.1mm	100000mm