


Pro Low Voltage LED Cable

3 Cores - Max. 7 Amps - PVC - 0.35mm²

tagra®

SKU: TC3C.35

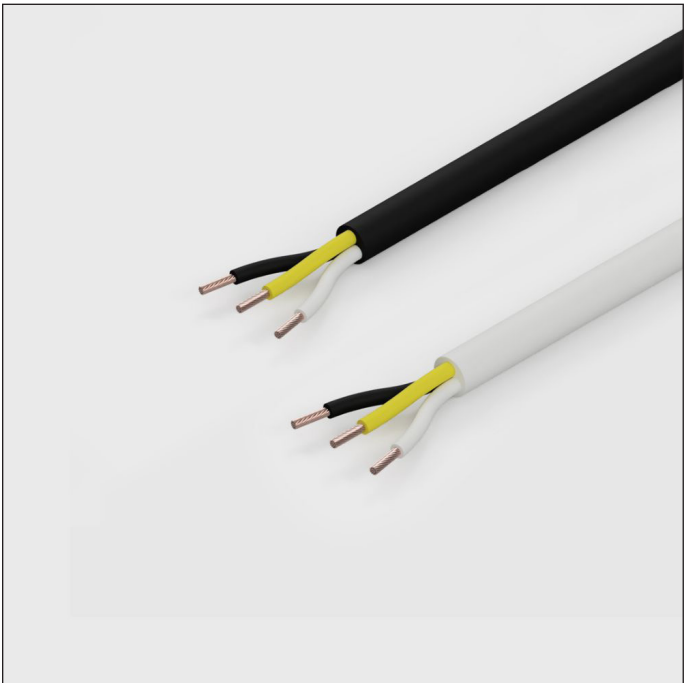

7A
Max.
Per Core

3
Core

PVC

CCT

Key Features

- ▶ 7A Current Capacity


▶ 60V Voltage Rating

▶ Made in the UK
- ▶ Black or White, PVC

▶ 10M, 50M & 100M

▶ 0.35mm² Conductor

Dimensions

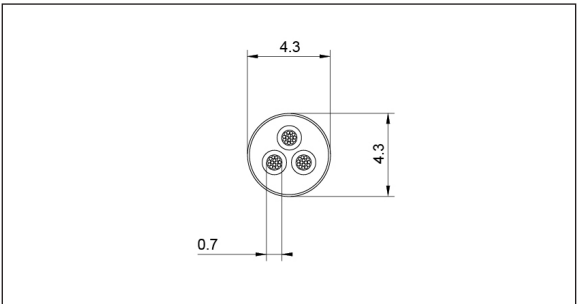

Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions
3x (12/0.20mm)	0.35mm ²	7.0A per core	Ø4.3mm
Manufacture Standards	Conductor	Cable Sheath	
ISO 6722-1:2011 (Class B)	Bare Copper BS EN 60228:2005	PVC	
Voltage Rating	Operating Temp	Flame Propagation	Min. Bend Radius
Max. 60V	-40°C ~ +105°C	ISO 6722-1:2011	30mm
Chemical Resistance to:		BS Softness	Shore A Hardness
Acids, alkalis, alcohols, oils, saltwater		60-65	64-66

Wire Colours	
Black	V+
White	W-
Yellow	WW-

Available SKUs

SKU	Colour	Dimensions	Length
TC3CR0.35BLK-10M	Black	Ø4.8mm	10000mm
TC3CR0.35BLK-50M	Black	Ø4.8mm	50000mm
TC3CR0.35BLK-100M	Black	Ø4.8mm	100000mm
TC3CR0.35WHT-10M	White	Ø4.8mm	10000mm
TC3CR0.35WHT-50M	White	Ø4.8mm	50000mm
TC3CR0.35WHT-100M	White	Ø4.8mm	100000mm