



IS 15885(Part 2/Sec13)
 8 (for XLG-200L type only)    Note.15
 (Except for Blank type)



(Except for L type)

UL
 FCC
 RoHS
 CCC
 CB
 EAC
 CE
 UKCA
 NOM
 Note.15
 (Except for Blank type)

■ Features

- Wide input range 100~305V AC(Class I)
- Full power output at 70~100% Constant power mode operation
- Metal case with IP67, suitable for outdoor application
- Surge protection with 6KV/4KV (10KV/6KV optional)
- 3 in 1 dimming function (Dim to off and Isolation design)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: OVP/SCP/OCP/OTP
- Life time >50,000 hrs. and 5 years warranty

■ Applications

- Skyscraper lighting
- Street lighting
- Floodlight Lighting
- Stage lighting
- Fishing lighting
- Horticulture lighting
- Bay lighting
- DMX power supply
- Type HL for use in class I, Division 2


■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

XLG-200 series is a 200W LED AC/DC driver featuring the constant power mode. XLG-200 operates from 100~305VAC and offers models with different rated current ranging between 700mA and 16A. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40°C ~+90°C case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-200 series comply with the latest version of IEC61347/GB19510.1 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

■ Model Encoding

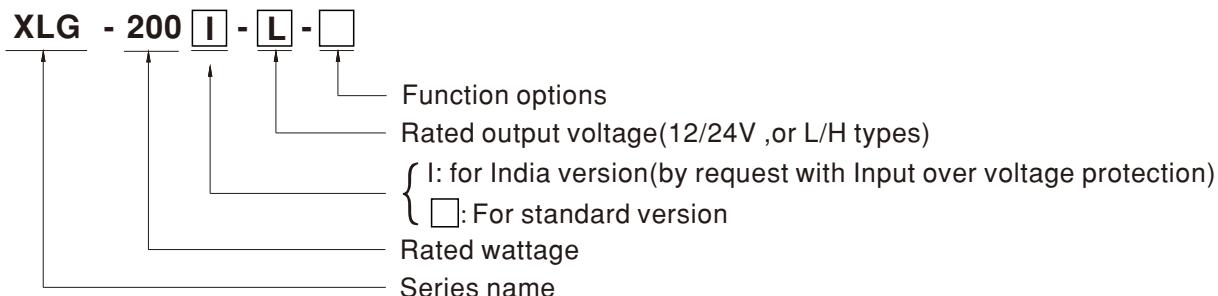

Type	Function	Note
Blank	Io and Vo fixed.(For harsh environment)	By request
A	Io adjustable via built-in potentiometer	In Stock
AB	Io adjustable via built-in potentiometer + 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
CV	CV-type only with constant voltage function and only for 12V and 24V models, Io and Vo are fixed.	By request

Note: 1.12V and 24V models without AB type

2. India version needs MOQ for production, please consult MEANWELL for detail


SPECIFICATION

MODEL	XLG-200□-12-□	XLG-200□-24-□		
OUTPUT	DC VOLTAGE	12V		
	CONSTANT CURRENT REGION Note.2	8.4~12V		
	RATED CURRENT (Default)	16A		
	RATED POWER	192W		
	RIPPLE & NOISE (max.) Note.3	150mVp-p		
	CURRENT ADJ. RANGE	Adjustable for A-Type only (via the built-in potentiometer)		
		8 ~ 16A		
		4.15 ~ 8.3A		
	VOLTAGE TOLERANCE Note.4	±3.0%		
	LINE REGULATION	±0.5%		
INPUT	LOAD REGULATION	±2%		
	SETUP, RISE TIME Note.6	500ms, 100ms/230VAC, 1200ms, 100ms/115VAC		
	HOLD UP TIME (Typ.)	10ms/ 230VAC 10ms/ 115VAC		
	VOLTAGE RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)		
PROTECTION	FREQUENCY RANGE	47 ~ 63Hz		
	POWER FACTOR	PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load		
	TOTAL HARMONIC DISTORTION	THD < 10%(@load ≥ 50%/115V, 230VAC; @load ≥ 75%/277VAC)		
	EFFICIENCY (Typ.)	92% 94%		
	AC CURRENT	2.2A / 115VAC 1.1A / 230VAC 0.9A / 277VAC		
	INRUSH CURRENT(Typ.)	COLD START 65A(twidth=550μs measured at 50% Ipeak) at 230VAC; Per NEMA 410		
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC		
	LEAKAGE CURRENT	<0.75mA / 277VAC		
ENVIRONMENT	NO LOAD POWER CONSUMPTION	No load power consumption <0.5W(for standard version)		
	OVER CURRENT	110~160% for CV type, 95~108% for other type CV-type: Hiccup mode only; Other type: Hiccup or constant current limiting; Recovers automatically after fault condition is removed		
	SHORT CIRCUIT	CV-type: Hiccup mode only; Other type: Hiccup or constant current limiting; Recovers automatically after fault condition is removed		
	OVER VOLTAGE	13.5 ~ 18V 27 ~ 34V Shut down output voltage, re-power on to recover		
	INPUT OVER VOLTAGE	320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed) Can survive input voltage stress of 440Vac for 48 hours(Input over voltage only for XLG-200I series)		
	OVER TEMPERATURE	Shut down output voltage, re-power on to recover		
EMC SAFETY &	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)		
	MAX. CASE TEMP.	Tcase=+90°C		
	WORKING HUMIDITY	20 ~ 95% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)		
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes		
	SAFETY STANDARDS Note.7	UL8750(type"HL"), CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384;GB19510.1, GB19510.14;EAC TP TC 004;J61347-1(H29), J61347-2-13(H29),KC61347-1,KC61347-2-13,IS15885(Part2/Sec13)(for XLG-200I type only); NOM-058-SCFI-2017(except for Blank type);IP67 approved		
EMC IMMUNITY	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC		
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level/Note
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Radiated	BS EN/EN55015(CISPR15) ,GB/T 17743	-----
		Harmonic Current	BS EN/EN61000-3-2 ,GB17625.1	Class C @load ≥ 50%
		Voltage Flicker	BS EN/EN61000-3-3	-----
	EMC IMMUNITY	BS EN/EN61547		
		Parameter	Standard	Test Level/Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact
		Radiated	BS EN/EN61000-4-3	Level 3
		EFT/Burst	BS EN/EN61000-4-4	Level 3
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth(6K/10K option)
		Conducted	BS EN/EN61000-4-6	Level 3
OTHERS	Magnetic Field	BS EN/EN61000-4-8	Level 4	
	Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
	MTBF	2300.1K hrs min. Telcordia SR-332 (Bellcore); 200.7Khrs min. MIL-HDBK-217F (25°C)		
DIMENSION	DIMENSION	199*63*35.5mm (L*W*H)		
	PACKING	0.85Kg;16pcs /14.2Kg /0.75CUFT		
	NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE"(Except for CV-type). 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 4. Tolerance : includes set up tolerance, line regulation and load regulation. 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 7. Only CE/ENEC/CB is available for CV-type. XLG-200I series without UL/CSA certificate. 8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 9. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75°C or less. 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 12. Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information. 13. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf 14. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains. 15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details. 16. For A/AB type need to consider built in using to comply with Type HL application. ✎ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx		

SPECIFICATION

MODEL	XLG-200□-L-□	XLG-200 □-H-□
OUTPUT	RATED CURRENT (Default) 700mA	3500mA
	RATED POWER 200W	200W
	CONSTANT CURRENT REGION Note.2 142~285V	27~56V
	FULL POWER CURRENT RANGE 700~1050mA	3500~5550mA
	OPEN CIRCUIT VOLTAGE (max.) 300V	60V
	CURRENT ADJ. RANGE Adjustable for A/AB-Type only (via the built-in potentiometer)	
	350~1050mA	1750~5550mA
	CURRENT RIPPLE 3.0%(@ Load \geq 50% rated voltage)	
	CURRENT TOLERANCE $\pm 5\%$	
	SET UP TIME Note.4 500ms/230VAC, 1200ms/115VAC	
INPUT	VOLTAGE RANGE Note.3 100~305VAC 142VDC~431VDC (Please refer to "STATIC CHARACTERISTIC" and "DRIVING METHODS OF LED MODULE" section)	
	FREQUENCY RANGE 47~63Hz	
	POWER FACTOR (Typ.) PF \geq 0.97 / 115VAC, PF \geq 0.95 / 230VAC, PF \geq 0.92 / 277VAC at full load (Please refer to "Power Factor Characteristic" section)	
	TOTAL HARMONIC DISTORTION THD $<$ 10% (@ load \geq 50% at 115VAC/230VAC, @load \geq 75% at 277VAC) Please refer to "TOTAL HARMONIC DISTORTION (THD)" section	
	EFFICIENCY (Typ.) 94%	93%
	AC CURRENT (Typ.) 2.2A / 115VAC 1.1A / 230VAC 0.9A / 277VAC	
	INRUSH CURRENT(Typ.) COLD START 65A(twidth=550 μ s measured at 50% I _{peak}) at 230VAC; Per NEMA 410	
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER 3 unit(circuit breaker of type B) / 6 units(circuit breaker of type C) at 230VAC	
	LEAKAGE CURRENT <0.75mA / 277VAC	
	STANDBY POWER CONSUMPTION Standby power consumption <0.5W for AB-Type(Dimming OFF)(for standard version)	
PROTECTION	SHORT CIRCUIT Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed	
	OVER VOLTAGE 301~360V	61~85V
	Shut down output voltage, re-power on to recovery	
	INPUT OVER VOLTAGE 320~390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed) Can survive input voltage stress of 440Vac for 48 hours(Input over voltage only for XLG-200 series)	
ENVIRONMENT	OVER TEMPERATURE Shut down output voltage, re-power on to recover	
	WORKING TEMP. T _{case} =-40~+90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)	
	MAX. CASE TEMP. T _{case} =+90°C	
	WORKING HUMIDITY 20~95% RH non-condensing	
	STORAGE TEMP., HUMIDITY -40~+80°C, 10~95% RH non-condensing	
SAFETY & EMC	TEMP. COEFFICIENT $\pm 0.03\%/\text{C}$ (0~60°C)	
	VIBRATION 10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
	SAFETY STANDARDS Note.5 UL8750(type "HL"), CSA C22.2 No. 250.13-12; BS EN/ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384;GB19510.1, GB19510.14;EAC TP TC 004; J61347-1(H29), J61347-2-13(H29),KC61347-1,KC61347-2-13,IS15885(Part2/Sec13)(for XLG-200I type only); NOM-058-SCFI-2017(except for Blank type);IP67 approved	
	WITHSTAND VOLTAGE I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC	
	ISOLATION RESISTANCE I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH	
EMC	EMC EMISSION Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load \geq 50%); BS EN/EN61000-3-3	
	EMC EMISSION	Parameter Standard Test Level/Note
		Conducted BS EN/EN55015(CISPR15),GB/T 17743 -----
		Radiated BS EN/EN55015(CISPR15),GB/T 17743 -----
		Harmonic Current BS EN/EN61000-3-2,GB17625.1 Class C @load \geq 50%
		Voltage Flicker BS EN/EN61000-3-3 -----
	EMC IMMUNITY	BS EN/EN61547
		Parameter Standard Test Level/Note
		ESD BS EN/EN61000-4-2 Level 3, 8KV air ; Level 2, 4KV contact
		Radiated BS EN/EN61000-4-3 Level 3
		EFT/Burst BS EN/EN61000-4-4 Level 3
OTHERS	Surge BS EN/EN61000-4-5 4KV/Line-Line 6KV/Line-Earth(6K/10K option)	
	Conducted BS EN/EN61000-4-6 Level 3	
	Magnetic Field BS EN/EN61000-4-8 Level 4	
	Voltage Dips and Interruptions BS EN/EN61000-4-11 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
	MTBF 2300.1K hrs min. Telcordia SR-332 (Bellcore); 200.7Khrs min. MIL-HDBK-217F (25°C)	
	DIMENSION 199*63*35.5mm (L*W*H)	
	PACKING 0.85Kg;16pcs/14.2Kg/0.75CUFT	
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE". 3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 4. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 5. XLG-200I series without UL/CSA certificate. 6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 7. This series meets the typical life expectancy of >50,000 hours of operation when T _{case} , particularly $T_{C_{10}}$ point (or TMP, per DLC), is about 75°C or less. 8. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 10. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. 11. Products sourced from the Americas regions may not have the CCC/PSE/BIS/KC logo. Please contact your MEAN WELL sales for more information. 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf 13. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 14. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains. 15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details. 16. For A/AB type need to consider build in using to comply with Type HL application. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx	


■ BLOCK DIAGRAM

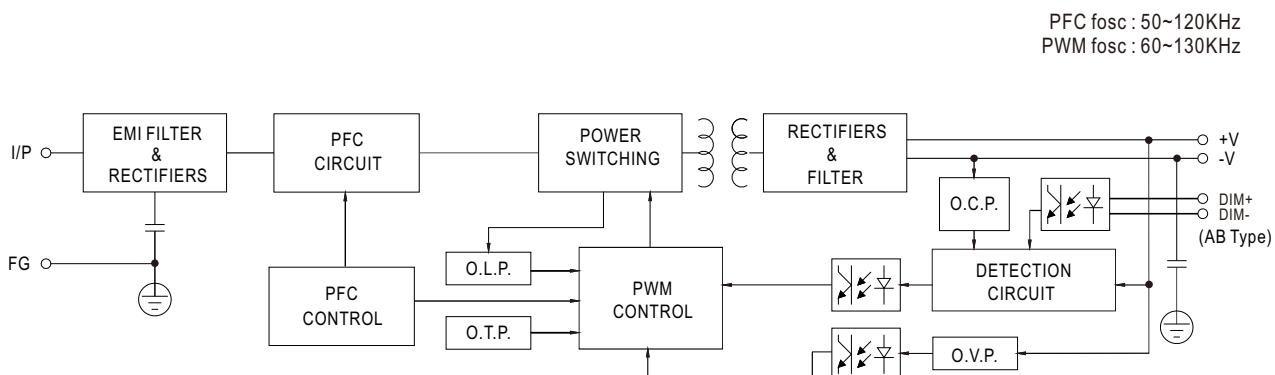

■ DRIVING METHODS OF LED MODULE


※ I-V Operating Area

◎ XLG-200-L

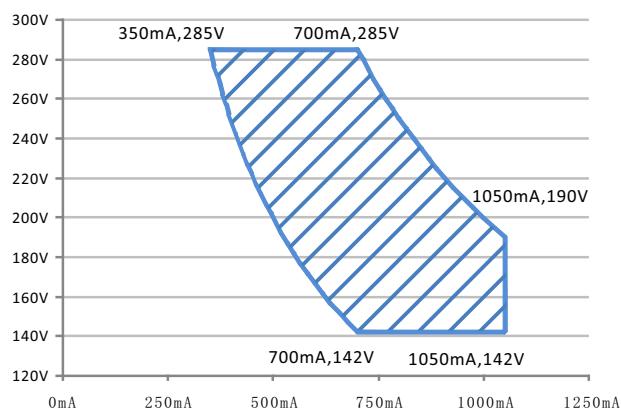

■ Recommend Performance Region


◎ XLG-200-H

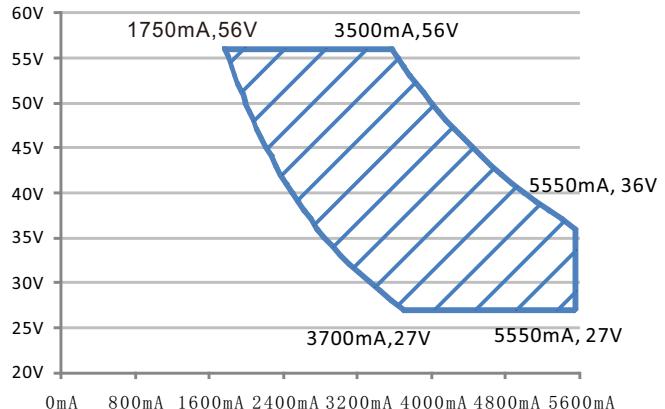

■ Recommend Performance Region


◎ XLG-200-12,24

※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs, except for CV-type.

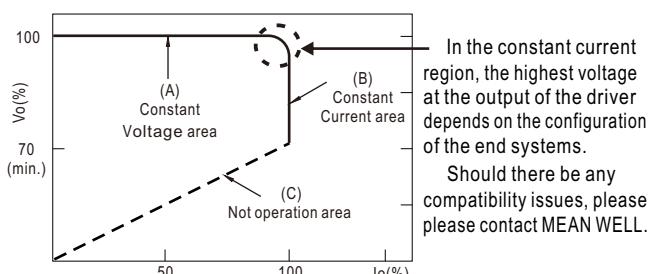

Typical output current normalized by rated current (%)



■ DIMMING OPERATION

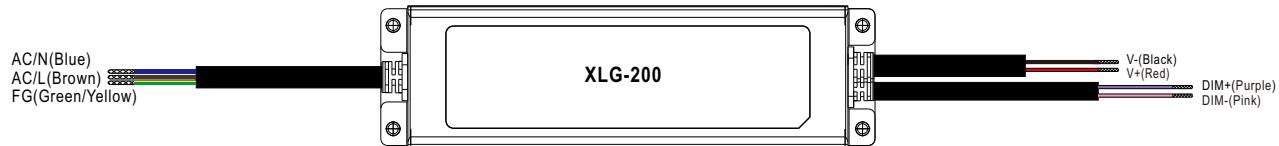



※ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100 \mu\text{A}$ (typ.)



◎ Applying additive 0 ~ 10VDC

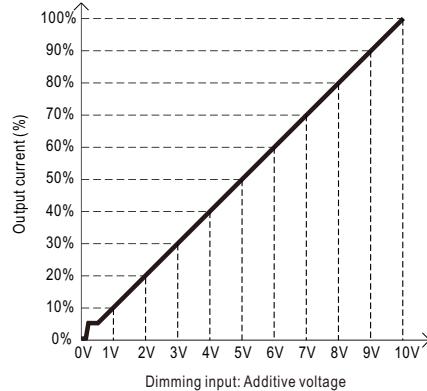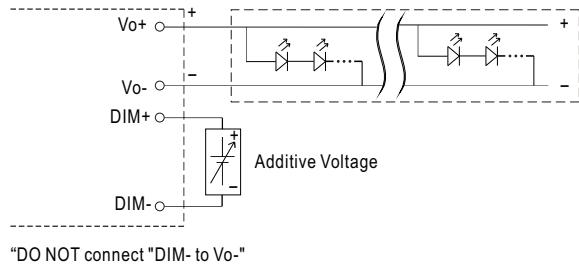

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

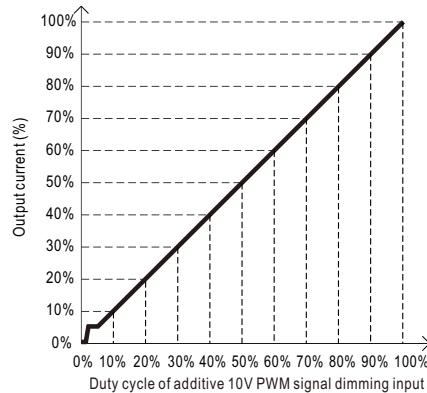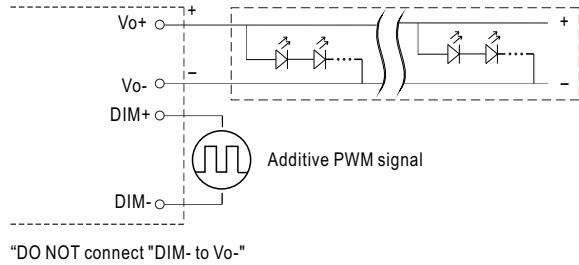



◎ Applying additive resistance:

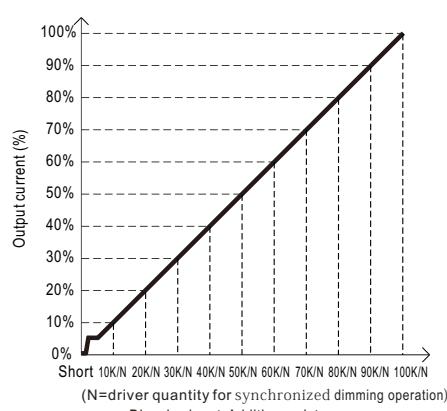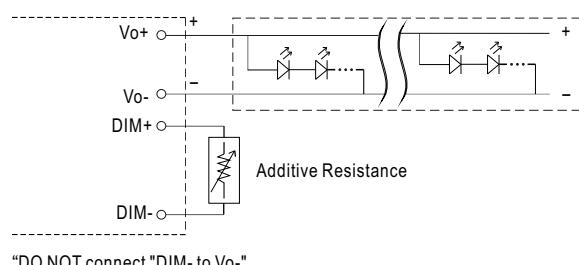

Note : 1. Min. dimming level is about 8% and the output current is not defined when $0\% < \text{Iout} < 8\%$.


2. The output current could drop down to 0% when dimming input is about $0\text{k}\Omega$ or 0Vdc , or 10V PWM signal with 0% duty cycle.

■ OUTPUT LOAD vs TEMPERATURE

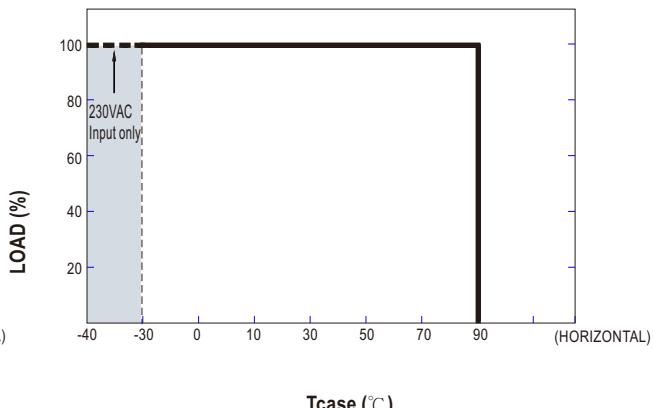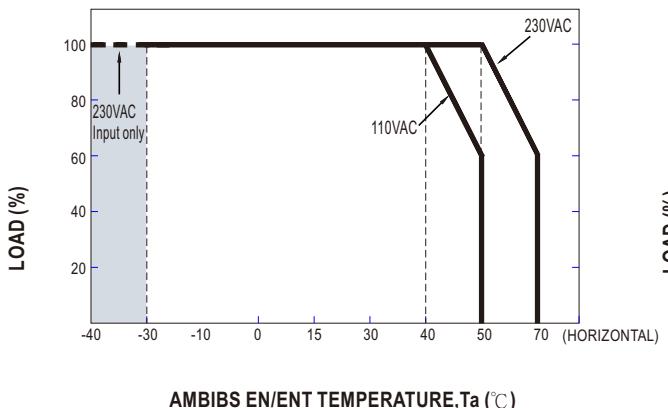


If XLG-200 operates in Constant Power mode with the rated current the maximum workable T_a is 50°C (Typ. 230VAC) or 40°C (typ. 110VAC). Below 110VAC@ -30°C may has restart situation within 5s after power-on.

■ STATIC CHARACTERISTIC

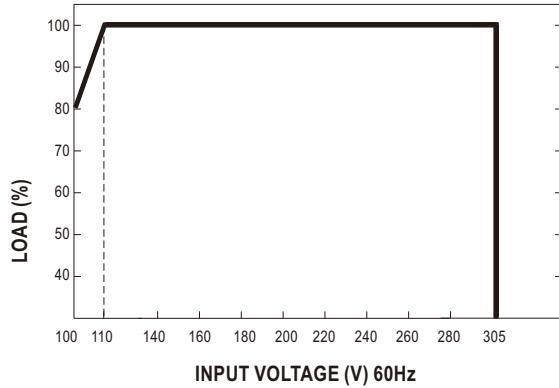


■ POWER FACTOR (PF) CHARACTERISTIC

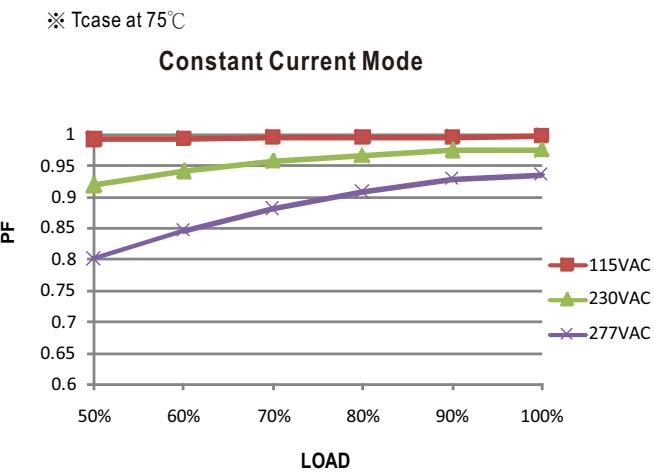

■ TOTAL HARMONIC DISTORTION (THD)


※ XLG-200-L Model, $T_{\text{case}} \text{ at } 75^{\circ}\text{C}$

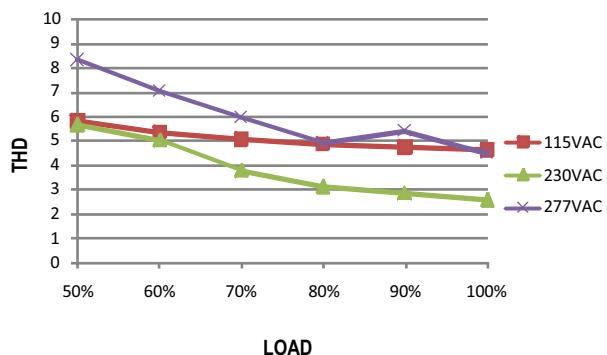

■ EFFICIENCY vs LOAD

XLG-200 series possess superior working efficiency that up to 94% can be reached in field applications.

※ XLG-200-L Model, $T_{\text{case}} \text{ at } 75^{\circ}\text{C}$

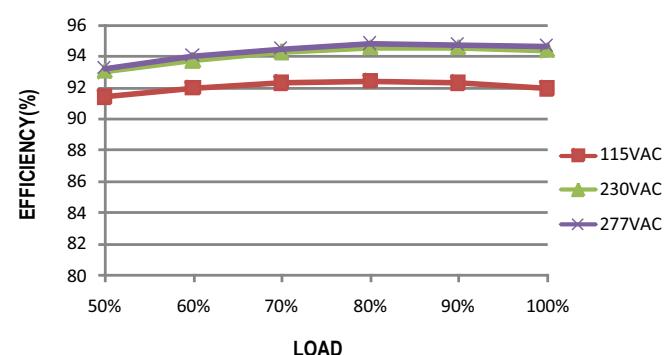




200W Constant Power Mode LED Driver

XLG-200 series


■ LIFE TIME

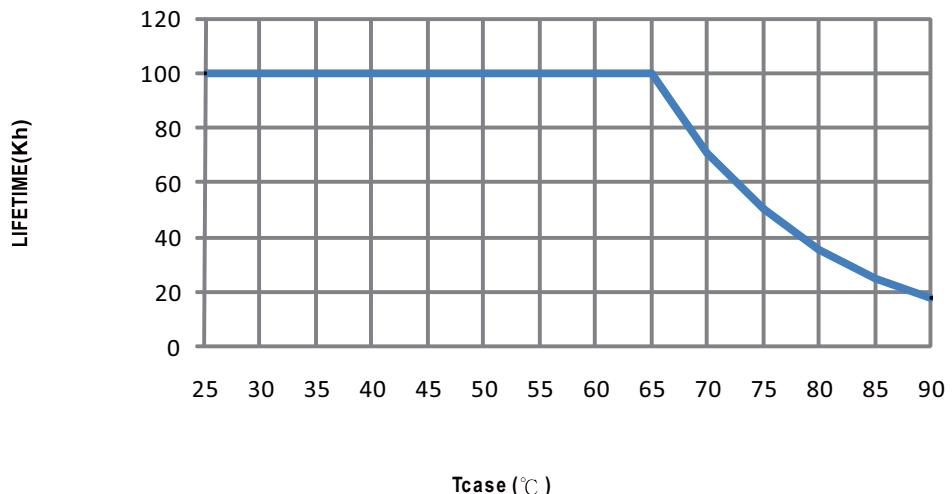


■ MECHANICAL SPECIFICATION

 Case No.:244A Unit:mm Tolerance: ± 1


※ Blank/CV-Type

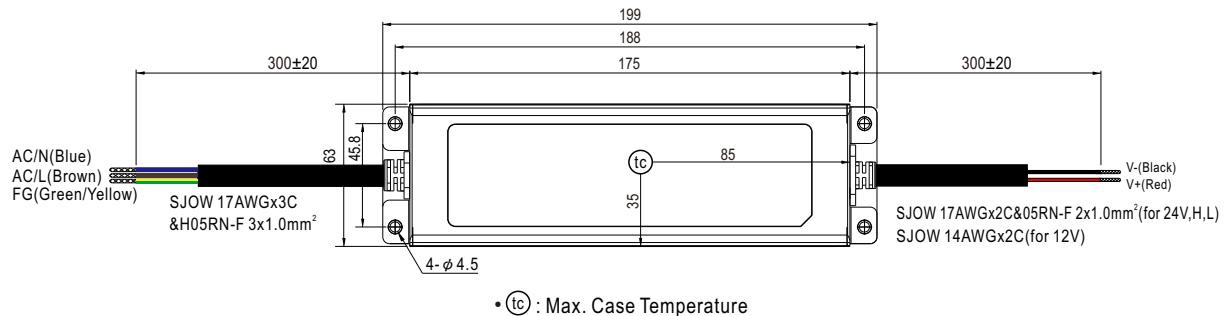



• (tc) : Max. Case Temperature




※ A-Type

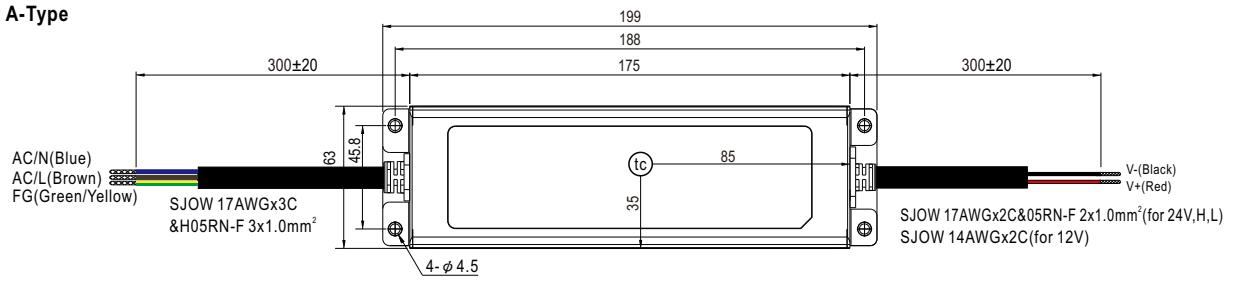


• (tc) : Max. Case Temperature

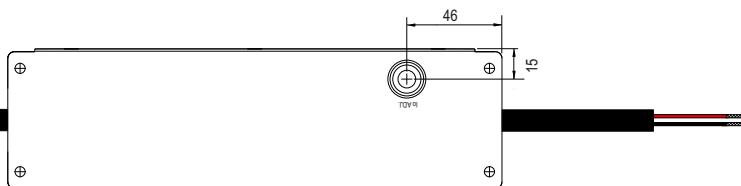


※ AB-Type

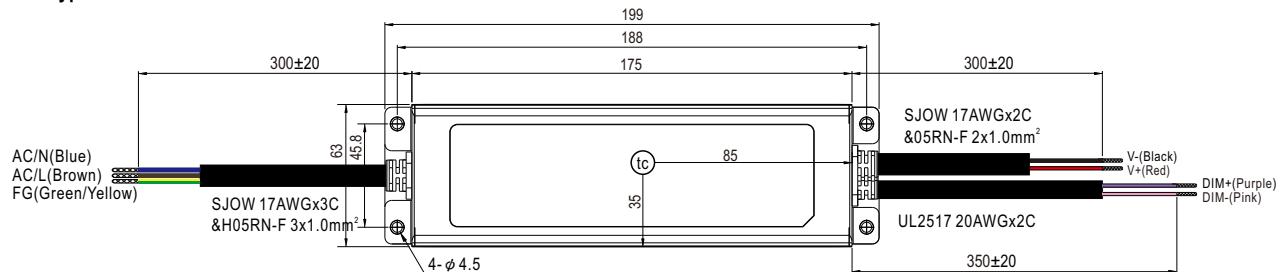

• (tc) : Max. Case Temperature

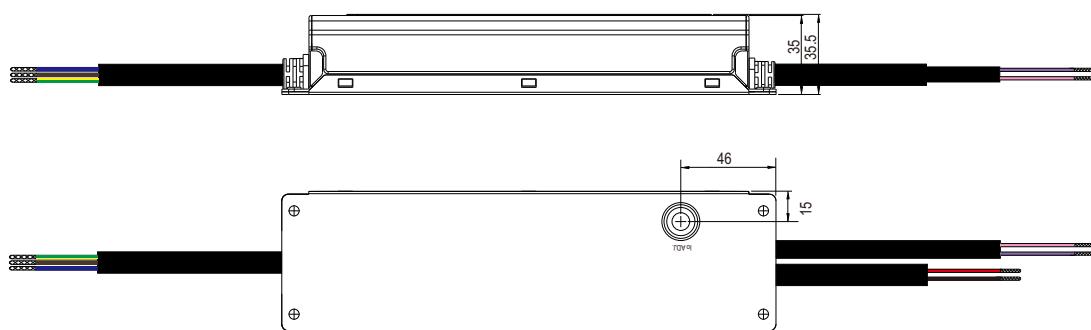

■ Recommend Mounting Direction

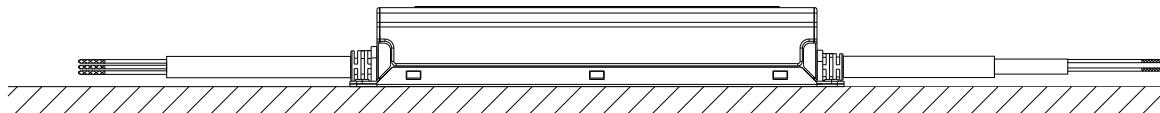

■ INSTALLATION MANUAL

 Please refer to : <http://www.meanwell.com/manual.html>