

PP24-RGB2765K2885M



Key Features

- Product Width: 12 mm
- Lm/m (up to): 1630 Lm/m
- Lm/W (up to): 90 Lm/W
- CRI: 95+
- Lightsource SDCM: ≤3
- Run Length (Max): 5 m
- Available Colours: 2300K - 6500K
- Warranty: 7 Years

24V

PWM

120°
BEAM

From
1 Bin

>95
CRI

HORIZ
BEND

2oz
PCB


IP20

Mechanical Data

| | |
|-----------------------|------------|
| Bend Direction | Horizontal |
| Cable Length | 500 mm |
| Cable Sheath Material | PVC |
| Cable Weight | 20 AWG |
| LED Chip Brand | SA |
| Copper Foil Weight | 2 oz |
| Cut Points | 62.5 mm |
| LED Pitch | 10.16 mm |
| LEDs Per Unit | 18 |

| | |
|----------------------------|--------------|
| LEDs Per Metre | 288 |
| LEDs Total | 14400 |
| PCB Type | Flexible |
| Self Adhesive Brand | 3M |
| Self Adhesive Model Number | 300LSE |
| Body Colour | White |
| Entry Cable Direction | End |
| Product Dimensions | 5000x12x2 mm |

Dimensions

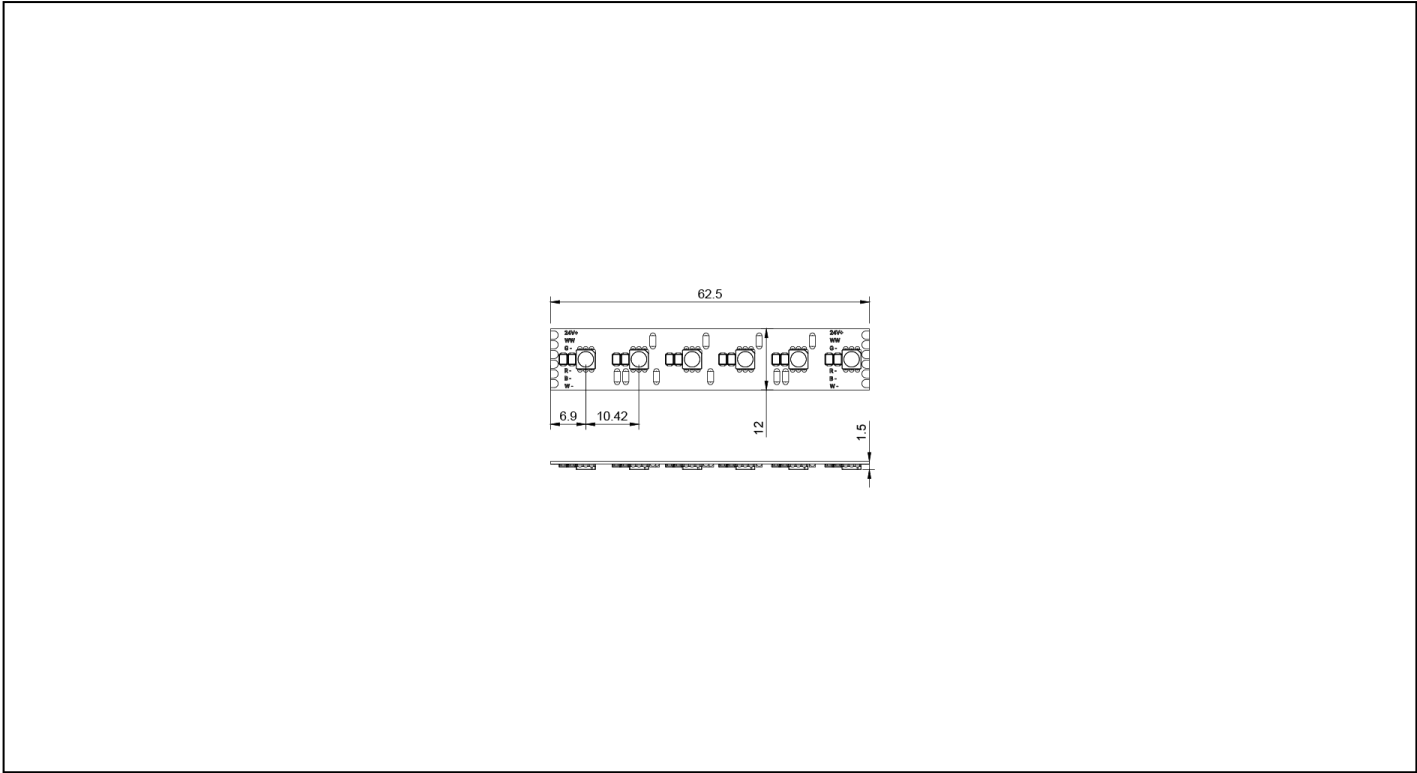

Input

| | |
|---------------|------|
| Input Voltage | 24 V |
|---------------|------|

Control

| | |
|--------------|-----|
| Dimming Type | PWM |
|--------------|-----|

Electrical Data

| | |
|-------------------------------------|---------|
| Constant Voltage / Constant Current | CV |
| Current Max · White @1 Metre | 0.34 A |
| Current Max · Rated | 0.825 A |
| Wattage Max · @1 Metre | 19.8 W |
| Wattage Typ · @1 Metre | 18 W |
| Wattage Typ · @5 Metre | 90 W |
| Wattage Typ · @Max Run Length | 90 W |
| Current Typ · @Max Run Length | 3.75 A |
| Current Max · Blue @1 Metre | 0.12 A |
| Current Max · Green @1 Metre | 0.126 A |
| Current Max · Red @1 Metre | 0.17 A |
| Max · Run Length | 5 m |

Photometric Data

| | |
|---------------------------|-------------|
| Beam Angle | 120 ° |
| Bin Number | 1 |
| Colour Type | RGBCCT |
| CRI | 95 |
| Lumen Total | 7420 Lm |
| Lumens Per Metre (White) | 984 Lm/m |
| Lumens Per Watt (Blue) | 23.32 Lm/W |
| Lumens Per Watt (Green) | 97.48 Lm/W |
| Lumens Per Watt (Red) | 35.67 Lm/W |
| Lumens Per Watt (White) | 122.21 Lm/W |
| Lumens Per Watt (White 2) | 125.42 Lm/W |

0161 507 9249 | support@ultraleds.co.uk | www.ultraleds.co.uk | Manchester, M17 1SJ Date: 08/07/2025

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions

| | |
|--------------------------|---------------|
| SDCM | < 3 |
| Lumens Per Metre | 1484 Lm/m |
| Lumens Per Metre (Blue) | 66 Lm/m |
| Lumens Per Metre (Red) | 142 Lm/m |
| Lumens Per Watt | 82 Lm/W |
| Wavelength | 628 nm |
| R9 Value | 0 |
| CCT | 2700 - 6500 K |
| Wavelength Blue | 465 - 470 nm |
| Wavelength Green | 520 - 525 nm |
| Wavelength Red | 620 - 625 nm |
| Environment | |
| Ingress Protection (IP) | IP20 |
| Interior or Exterior Use | Interior |
| Efficiency | |
| Rated Life | 50000 Hours |